









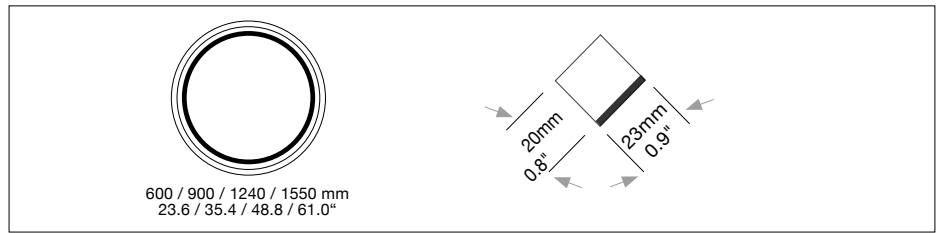

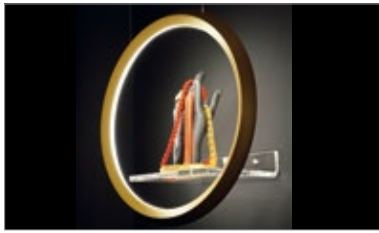






GIRATA

Vertical

Housing: Circular aluminum profile with integrated acrylic
Design: MARKUS BISCHOF



Sizes	Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version		
	Ø 600 mm	23.6"	33	1,530	3.0 / 6.6	901.	x x.	x x.	x x.	x x.	x x x.	x		
	Ø 900 mm	35.4"	55	2,486	3.5 / 7.7	902.	x x.	x x.	x x.	x x.	x x x.	x		
	Ø 1240 mm	48.8"	72	3,314	5.0 / 11.0	903.	x x.	x x.	x x.	x x.	x x x.	x		
	Ø 1550 mm	61.0"	88	4,060	5.5 / 12.1	904.	x x.	x x.	x x.	x x.	x x x.	x		
LED 24V CRI > 90 *CRI > 80		Warm-white	3000 K	(Standard)	x x x.	30.	x x.	x x.	x x.	x x x.	x			
		Neutral-white	4000 K	(Optional)	x x x.	40.	x x.	x x.	x x.	x x x.	x			
		Extra warm-white	2700 K	(Optional)	x x x.	27.	x x.	x x.	x x.	x x x.	x			
		Extra warm-white	2200 K*	(Optional)	x x x.	22.	x x.	x x.	x x.	x x x.	x			
Dimming		Dimmable 0 - 10 V	(Standard)	x x x.	x x.	51.	00.	x x.	x x x.	x				
		DMX (RGB possible)	(Optional)	x x x.	x x.	31.	00.	x x.	x x x.	x				
		LUTRON (contact factory)	(Optional)	x x x.	x x.	71.	00.	x x.	x x x.	x				
Finishes	<div><div> 11 white</div><div>(Optional)</div><div> 22 aluminum polished</div><div> 27 brush-finished aluminum</div><div> 30 anthracite</div><div> 32 crocodile black</div><div> 33 sand silver fine textured</div><div> 35 gold</div><div> 36 brass</div><div> 37 bronze fine textured</div><div> 38 copper</div><div> 10 black fine textured</div><div> XX Custom finish</div></div>													
		Power Supply Cable		(Standard) Z 70 Silver	(Optional) Z 71 white	Z 72 grey	Z 73 black							
	Z 74 orange			Z 75 red	Z 76 green									
When using current carrying steel cables in Mounting Versions F, R leave this section blank						x x x.	x x.	x x.	x x.	x x.				

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution inwards




Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08


1) Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
2) Weight of lights without remote technical unit or canopy.

GIRATA Vertical


Housing: Circular aluminum profile with integrated acrylic
Design: MARKUS BISCHOF

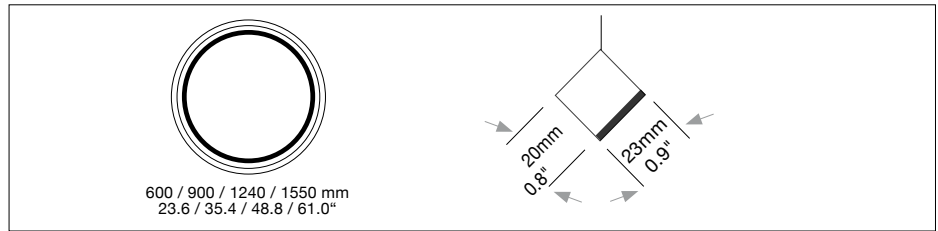


Mounting Version




2 point suspension, with external power supply unit in suspended ceiling



Suspension through canopy



Current-carrying steel cables.



Suspension with current-carrying steel cables and cavity wall box.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
x x x.	x x.	x x.	x x.	x x.	x x x	.

A, R = Distance of external power supply unit to light fixture max. 10m / 39'4".

Including steel cable suspension 3000mm / 118"
or/and power supply cable 3000mm / 118"




x x x.	x x.	x x.	x x.	x x.	x x x	x
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units

Type	Size mm / inch L W H	For use with Mounting Version
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, R

Input voltage for all external power supply units and canopy is




Dimensions of canopy

Type	Size mm / inch body / H	For use with Mounting Version
DBL 390	up to Ø 1240 mm L 390 x B 70 x H 70 mm L 15.3 x B 2.7 x H 2.7"	F / E
DBL 490	up to Ø 1550mm L 490 x B 70 x H 70 mm L 19.4 x B 2.7 x H 2.7"	F / E

Canopy finish: white (11)
contact factory for other finishes

USA/Canada: Canopy mounts to 4" single junction box.

Optional



Ceiling mounting version A

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

200. 00. 00. 00. 11 (white)

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution
inwards



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

- 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
- 2) Weight of lights without remote technical unit or canopy.