


INSOSPESO CEILING

Housing: Circular aluminum profile with integrated acrylic cover
 Design: JÜRGEN BECKERT

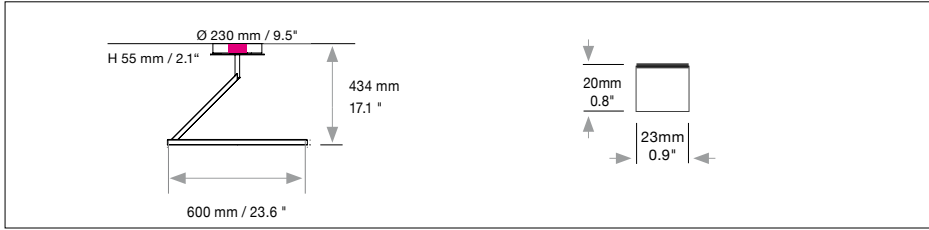

Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version	
Sizes	Ø 600 mm	23.6"	33	1,557	3.0 / 6.6	593.	x x .	x x .	x x .	x x .	x x x .	P

LED 24V CRI > 90 *CRI > 80		Warm-white	3000 K	(Standard)	x x x .	30.	x x .	x x .	x x .	x x x .	x
		Neutral-white	4000 K	(Optional)	x x x .	40.	x x .	x x .	x x .	x x x .	x
		Extra warm-white	2700 K	(Optional)	x x x .	27.	x x .	x x .	x x .	x x x .	
		Extra warm-white	2200 K*	(Optional)	x x x .	22.	x x .	x x .	x x .	x x x .	x

Dimming		Dimmable 0 - 10 V	(Standard)	x x x .	x x .	51.	00.	x x .	x x x .	x
		DMX	(Optional)	x x x .	x x .	31.	00.	x x .	x x x .	x
		LUTRON (contact factory)	(Optional)	x x x .	x x .	71.	00.	x x .	x x x .	x

Finishes																									
(Standard)		11	white	(Optional)		22	aluminum polished		30	anthracite		27	brush-finished aluminum		32	crocodile black		33	sand silver fine textured						
						35	gold		36	brass		37	bronze fine textured		38	copper		10	black fine textured						
						XX	Custom finish																		

593.	x x .	x x .	x x .	x x .	000.	P
-------------	-------	-------	-------	-------	-------------	----------

Complete order number

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

1) Net lumen output: Losses due to diffusers and reflectors are considered.
 Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
 2) Weight of lights without remote technical unit or canopy.