


SLIM DIRECT

Housing: Circular aluminum profile with integrated acrylic cover downwards
Design: SATTLER

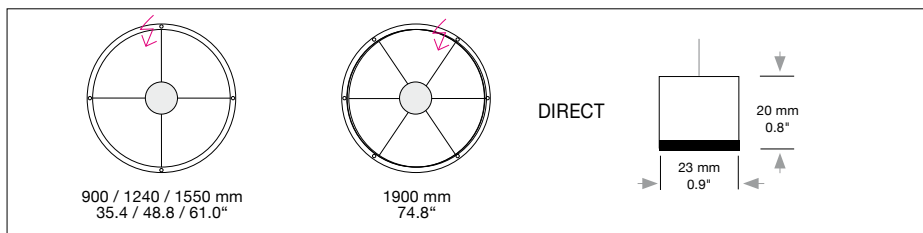


Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version												
Sizes																							
Ø 900 mm	35.4"	55	2,574	3.5 / 7.7	711.	X X.	X X.	X X.	X X.	X X X.	X												
Ø 1240 mm	48.8"	72	3,296	5.0 / 11.0	712.	X X.	X X.	X X.	X X.	X X X.	X												
Ø 1550 mm	61.0"	88	3,597	5.5 / 12.1	713.	X X.	X X.	X X.	X X.	X X X.	X												
Ø 1900 mm	74.8"	110	5,123	6.0 / 13.2	714.	X X.	X X.	X X.	X X.	X X X.	X												
LED 24V CRI > 90 *CRI > 80		Warm-white Neutral-white Extra warm-white Extra warm-white	3000 K 4000 K 2700 K 2200 K*	((Standard) (Optional) (Optional) (Optional)	X X X. X X X. X X X. X X X.	30. 40. 27. 22.	X X. X X. X X. X X.	X X. X X. X X. X X.	X X. X X. X X. X X.	X X X. X X X. X X X. X X X.	X X X X												
		RGB color control**		(Optional)	X X X.	60.	X X.	00.	X X.	X X X.	X												
** (only in combination with dimming DMX, DALI)																							
Dimming		Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)		(Standard) (Optional) (Optional)	X X X. X X X. X X X.	X X. X X. X X.	51. 31. 71.	00. 00. 00.	X X. X X. X X.	X X X. X X X. X X X.	X X X												
Finishes		11 white	(Standard)		22 aluminum polished		27 brush-finished aluminum		30 anthracite		32 crocodile black		33 sand silver fine textured										
					35 gold		36 brass		37 bronze fine textured		38 copper		10 black fine textured										
					XX Custom finish									X X X.	X X.	X X.	X X.	X X.	X X X.	X			
Power Supply Cable		000 without Mounting Version F	(Standard)		Z 70 Silver		Z 71 white		Z 72 grey		Z 73 black												
					Z 74 orange		Z 75 red		Z 76 green					X X X.	X X.	X X.	X X.	X X.	X X X.	X			
When using current carrying steel cables in Mounting Versions F, K, R, T leave this section blank																							


1) Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
2) Weight of lights without remote technical unit or canopy.

SLIM DIRECT


Housing: Circular aluminum profile with integrated acrylic cover downwards
Design: SATTLER

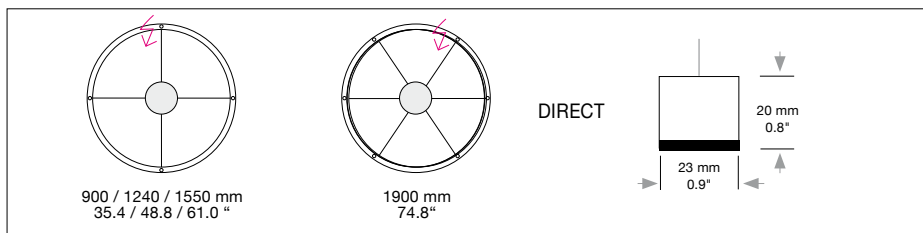


Mounting Version




up to Ø 1550 mm / 61.0"
4-point suspension
1900 mm / 74.8"
6-point suspension with external power supply unit in suspended ceiling




up to Ø 1550 mm / 61.0"
4-point suspension
1900 mm / 74.8"
6-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Not in combination with RGB




Suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.




Suspension with pendant canopy PB 366 and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"



Suspension with pendant canopy PB 366 and current-carrying steel cables.
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



Direct ceiling mounting
50mm / 1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118"; Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

Dimensions of external power supply units

Typ	Size mm / inch	For use with Mounting Version
	L W H	
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, R, K

Input voltage for all external power supply units and canopy is
120 / 277 VAC 50/60 Hz

Canopy finish: **white (11)** contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Dimensions of canopy (1 LED Stripe)


Typ	Size mm / inch	For use with Mounting Version
	Ø cover plate / body	
DB 230	Ø 230 / 210 mm / 9.5 x 8.3" up to size Ø 900 mm / 35.4"	B, E, F
DB 290	Ø 290 / 260 mm / 11.4 x 10.2" up to size Ø 1550 mm / 61.0"	B, E, F
DB 350	Ø 350 / 320 mm / 13.7 x 12.5" up to size Ø 1900 mm / 174.8"	B, E, F
PB 366	Ø 90 H 366 mm / 3.5 x 14.4" up to size Ø 1550 / 61.0"	S, T
PB 656	Ø 90 H 656 mm / 3.5 x 25.8" up to size Ø 1900 / 74.8"	S, T

Optional



LED spot in canopy
(SLIM size Ø 900 mm / 35.4", Dimension canopy DB 290)
4W/20°-40°, 400 Lumen (order separately)

762. 67. 01. 04. 11. (white)



Ceiling mounting version A, G

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.

200. 00. 00. 00. 11. (white)