




20 Linear Mini Z Cove




Compact and powerful continuous perimeter luminaire with plaster-in Plaster Trim knife edge detail for a perfect finish. Delivers light smoothly down the wall from a concealed position.

Housing	Precision extruded aluminum for true dimensions and tolerances Alignment hardware for invisible seam from below Housing provided in any exact length Snap-in LED insert for easy final installation Standard and tailored lengths Corners: standard and non-standard Finishes: RAL 9010 white 15% gloss
Integration	Seamless, architectural integration into gypsum walls and ceilings
Distribution	Continuous even illumination using an opal lens for homogeneous lens appearance, or satin diffuser / micro-prismatic lens for higher efficiency
LED	Constant Voltage, 90+ CRI, 3 Steps MacAdam, 3 W - 10 W per foot L70 lifetime (TM21 Projected 85C) Static White (2700K-4000K) = 60,000 hours RGBW (3000K White) = 50,000 hours Warm Dim (1800K-3000K) = 36,000 hours Tunable White, 1800K - 4000K / 2700K - 6500K, 1.5 W - 10 W/ft, constant current, >90 CRI L70 (TM21 Projected 85°C) Tunable White = 50,000 hours
Lens	OD - Opal Diffuser provides even, continuous line of light and general illumination MPL - Micro-prismatic lens provides lower brightness, general illumination
Driver	Remote driver Compatible with quality constant voltage (Static White / WD / RGBW) and constant current (Tunable White) drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	3lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE
Voltages	Low Voltage Fixture / 120-277VAC Driver (remote)

Lenses/Accessories

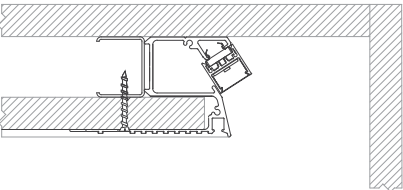

Gypsum Ceiling Mounting Options
2.5" minimum offset, 6" typical offset



technical
information

20 Linear Mini Z Cove

Model	Fixation	Pattern	Length	Power ²	CRI/ CCT ³	Driver ⁵	Lens	Finish	Options
WG-20MZC	RPT	S PI ¹ PO ¹ PZ ¹	A A x B A x B x C A x B x A x B	L M H PO P1 P2 P3	927 930 935 940 WD RGBW	X EL96 S DALI D010 DMX DPH L3DAE L3DOE	OD (std) MPL	W (std) F	AWNRF BT EM
					TW1840 TW2765	D2DT6 D2DT8			

Model

- WG-20MZC = 20 Linear Mini Z Cove

Fixation

- RPT = Recessed plaster trim

Pattern

- S = Straight run
- PI = Standard patterns 2, 3, or 4 sided with 90° inside corners on the same plane¹
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane¹
- PZ = Non-standard patterns and/or corners other than 90°; consult factory¹

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25")
For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

Power³

- L = 3W/ft low power (WD 2.7 W/ft) (24V)
- M = 6W/ft mid power (WD 5.5 W/ft) (24V) (RGBW - 7.6 W/ft)
- H = 10W/ft high power (WD 8 W/ft) (24V)
- P0 = 1.5 W/ft
- P1 = 3 W/ft
- P2 = 6 W/ft
- P3 = 10 W/ft

CRI/CCT (90+ CRI minimum)⁴

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- WD = Warm Dim (1800K - 3000K)
- RGBW = 3000K White (M power only) [30ft max run length]
- TW1840 = Tunable white (1800K - 4000K)
- TW2765 = Tunable white (2700K - 6500K)

Driver (remote)⁵

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = eldoLED 10%, 0-10V dimming, 120-277V
- DPH = Phase Dimming, 1% dimming, 120V only
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = eldoLED 24V, 0.1% 0-10V Dimming
- DALI = eldoLED DALI (DT6), 0.1% dimming (120-277V)
- DMX = eldoLED 24V, 0.1% DMX Dimming
- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
- D2DT6 = DALI-2 (DT6), 0.1% dimming (120-277V) [TW only]
- D2DT8 = DALI-2 (DT8), 0.1% dimming (120-277V) [TW only]

Lens

- OD = Satin opal diffuser (standard)
- MPL = Micro-prismatic lens

Finish

- W = White, 15% gloss, RAL 9010 (standard)
- F = Custom finish, specify RAL

Options

- AWNRF = Lutron Athena Wireless Node RF (specify with EL96, DALI, E1, D2DT6 or D2DT8)
- BT = Wireless CAS – Casambi (specify with D010, EL96, DALI, DMX, E1, D2DT6 or D2DT8)
- EM = Emergency LED driver (remote)

Whitegoods reserves the right to change any information without prior notice.

Notes

- See pattern specsheet.
- Wattage shown does not include power supplies/drivers.
- Refer to specsheet for delivered lumen data for all product configurations.
- TW offered up to P3 (10W/ft) power level.
- Remote power supply required. See power supply page for details.