



SLIM WALL

Housing: Wall lamp with indirect light distribution.
Circular aluminum profile with integrated acrylic.
Design: SATTLER

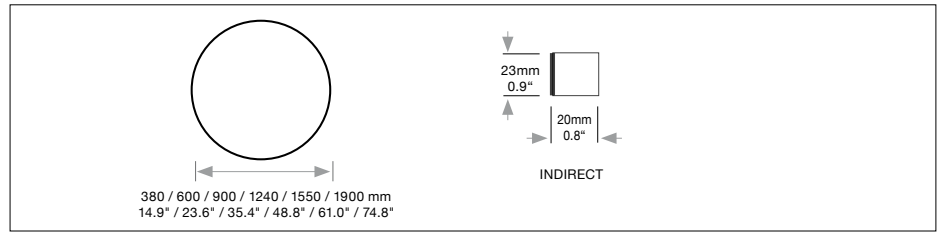


Mounting Version

1) Select a bracket:




K Wall bracket
85 mm / 3.3"
(white)




(Standard)

Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version
x x x.	x x.	x x. x x.	x x.	x x x.	K x
x x x.	x x.	x x. x x.	x x.	x x x.	J x
x x x.	x x.	x x. x x.	x x.	x x x.	x W



J Wall bracket
115 mm / 4.5"
(white)



(Optional)

2) Select a driver:

W Remote power supply for intermediate wall



(Standard)

x x x.	x x.	x x. x x.	x x.	Z80	x x
--------	------	-----------	------	------------	-----

Wall brackets in white. Available as a custom in polished aluminum

Complete order number

W = Distance of external power supply unit to light fixture max. 4m / 157".

Dimensions of external power supply units			
Type	Size mm / inch		For use with
	L	W H	Mounting Version
DE 1F	360 x 150 x	85 mm / 14.2 x 5.9 x 3.3"	W

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

