












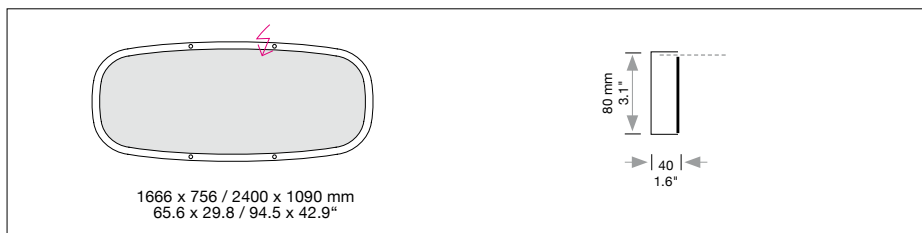















SOFT SQUARE LIGHT + ACOUSTIC

Housing: Aluminum profile, integrated acrylic cover. Fabric covering as a light and acoustic diffuser.
Design: SATTLER



Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version												
Sizes	1666 x 756 x 80 2400 x 1090 x 80	65.6 x 29.8 x 3.1 94.5 x 42.9 x 3.1	66 89	5,140 7,530	15 / 33.1 17 / 37.5	826. 838.	x x . x x .	x x . x x .	x x . x x .	x x . x x .	x x												
LED 24V CRI > 80		Neutral-white Cold-white Warm-white Extra warm-white Extra warm-white Tunable white* RGB color control* RGB + Neutral-White	4000 K 5000 K 3000 K 2700 K 2200 K 2700 - 6500 K 4000 K	(Standard) (Optional) (Optional) (Optional) (Optional) (Optional) (Optional) (Optional)	x x x . x x x . x x x . x x x . x x x . x x x . x x x . x x x .	40. 50. 30. 27. 22. 65. 60. 60.	x x . x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x . x x .	x x x . x x x . x x x . x x x . x x x . x x x . x x x . x x x .	x x x x x x x x													
Dimming		Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)		(Standard) (Optional) (Optional)	x x x . x x x . x x x .	x x . x x . x x .	51. 31. 71.	00. 00. 00.	x x . x x . x x .	x x x . x x x . x x x .	x x x												
Finishes (Standard)	 11 white	(Optional)	 22 aluminum polished	 30 anthracite	 27 brush-finished aluminum	 32 crocodile black	 33 sand silver fine textured	 35 gold	 36 brass	 37 bronze fine textured	 38 copper	 10 black fine textured	 40 brass patinated	 42 bronze patinated	 44 wood veneer, white borders	 XX Custom finish	x x x .	x x .	x x .	x x .	 ..	x x x .	x
Power Supply Cable (Standard)	 Z 70 Silver	(Optional)	 Z 71 white	 Z 72 grey	 Z 73 black	 Z 74 orange	 Z 75 red	 Z 76 green	x x x .	x x .	x x .	x x .	..	 ..	x								

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution direct




Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08


1) Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
2) Weight of lights without remote technical unit or canopy.

SOFT SQUARE LIGHT + ACOUSTIC


Housing: Aluminum profile, integrated acrylic cover. Fabric covering as a light and acoustic diffuser.
Design: SATTLER

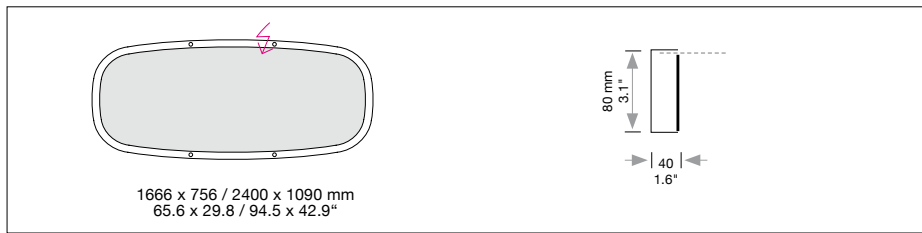


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB




Suspension with pendant canopy PB 366 and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"




Suspension with pendant canopy PB 366 and current-carrying steel cables.
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, H = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197" ; Version F, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number


Typ	Size mm / inch			For use with Mounting Version
	L	W	H	
DE 1F	360	150	85 mm / 14.2 x 5.9 x 3.3"	A, G, K

Typ	Size mm / inch		For use with Mounting Version
	Ø cover plate / body	Ø body	
DB 290	Ø 290 / 260 mm / 11.4 x 10.2"	Ø 290	B, E, F, H
DB 350	Ø 350 / 320 mm / 13.7 x 12.5"	Ø 350	B, E, F, H
PB 366	Ø 90 H 366 mm / 13.7 x 12.5"	Ø 90	S, T

Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Optional



Ceiling fixation for mounting version A

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

200. 00. 00. 00. 11 (white)