


SOFT SQUARE

Housing: Aluminum profile, integrated (I) or L-shaped acrylic cover (L)
Design: SATTLER

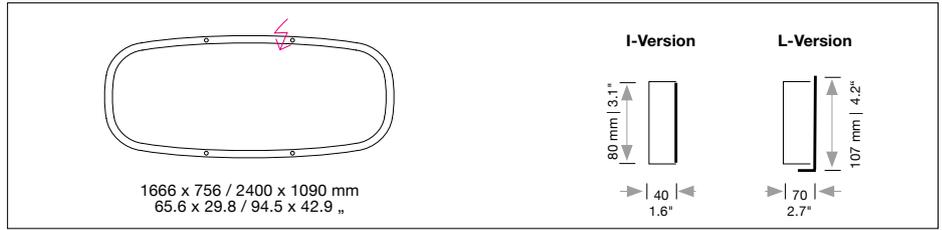

Sizes	Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version											
I-Version	1666 x 756 x 80	65.6 x 29.8 x 3.1	66	5,366	15 / 33.1	825.	X X X.	X X X.	X X X.	X X X.	X X X.	X											
	2400 x 1090 x 80	94.5 x 42.9 x 3.1	89	7,803	17 / 37.5	837.	X X X.	X X X.	X X X.	X X X.	X X X.	X											
L-Version	1666 x 756 x 107	65.6 x 29.8 x 4.2	65	5,822	15 / 33.1	824.	X X X.	X X X.	X X X.	X X X.	X X X.	X											
	2400 x 1090 x 107	94.5 x 42.9 x 4.2	89	8,415	17 / 37.5	836.	X X X.	X X X.	X X X.	X X X.	X X X.	X											
LED 24V CRI > 80			Neutral-white Cold-white Warm-white Extra warm-white Extra warm-white Tunable white* RGB color control* RGB + Neutral-White*	4000 K 5000 K 3000 K 2700 K 2200 K 2700 - 6500 K 4000 K 4000 K	(Standard) (Optional) (Optional) (Optional) (Optional) (Optional) (Optional) (Optional)	X X X. X X X.	69. 62. 63. 61. 22. 65. 60. 60.	X X X. X X X.	X X X. X X X.	X X X. X X X.	X X X. X X X.	X X X X X X X X											
Dimming			Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)		(Standard) (Optional) (Optional)	X X X. X X X. X X X.	X X X. X X X. X X X.	51. 31. 71.	00. 00. 00.	X X X. X X X. X X X.	X X X. X X X. X X X.	X X X											
Finishes		11 white (Standard)															X X X. X X X.	X X X. X X X.	X X X. X X X.	X X X. X X X.	X X X. X X X.	X X X. X X X.	X X X X X X X X X X X X X X X X
Power Supply Cable		Z 70 Silver (Standard)															X X X. X X X.	X X X. X X X.	X X X. X X X.	X X X. X X X.	X X X. X X X.	X X X. X X X.	X X X X X X X X

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution
direct / indirect




Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08


1) Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
2) Weight of lights without remote technical unit or canopy.

SOFT SQUARE


Housing: Aluminum profile, integrated (I) or L-shaped acrylic cover (L)
 Design: SATTLER

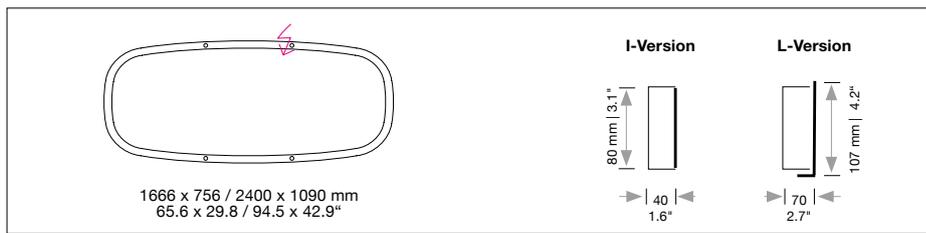


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB




Suspension with pendant canopy PB 366 and steel cables
 (a) 5000 mm / 196.8" +
 (b) 3000 mm / 118.1"




Suspension with pendant canopy PB 366 and current-carrying steel cables.
 (a) 5000 mm / 196.8" +
 (b) 3000 mm / 118.1"
 Not in combination with RGB.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, H = Distance of external power supply unit to light fixture max. 10m / 394"

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197" ; Version F, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"

X X X.	X X X	X				
--------	------	------	------	------	-------	---

Complete order number

Type	Size mm / inch			For use with Mounting Version
	L	W	H	
DE 1F	360	150	85 mm / 14.2 x 5.9 x 3.3"	A, G, K

Type	Size mm / inch		For use with Mounting Version
	Ø cover plate / body	Ø body	
DB 290	Ø 290 / 260 mm / 11.4 x 10.2"	Ø 290	B, E, F, H
DB 350	Ø 350 / 320 mm / 13.7 x 12.5"	Ø 350	B, E, F, H
PB 366	Ø 90 H 366 mm / 13.7 x 12.5"	Ø 90	S, T

Canopy finish: white (11) contact factory for other finishes
 USA/Canada: Canopy mounts to 4" octagonal junction box.


Input voltage for all external power supply units and canopy is 120 / 277 VAC 50/60 Hz

Optional



LED spot in canopy
 4W/20°-40°, 400 Lumen (order separately)

762. 67. 01. 04. 11. (white)



Ceiling fixation for mounting version A

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.