


TOCCATA



Housing: Pendant light with direct light distribution, 3/ 5 parts aluminum profile, with integrated acrylic cover.
 Design: MARKUS BISCHOF

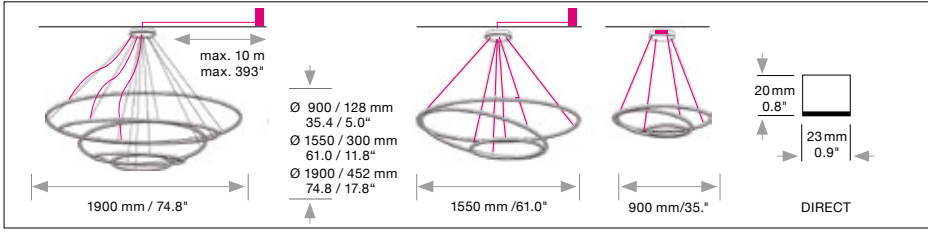

Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
Sizes											
Ø 900 mm	35.4"	85	4,056	8.0 / 17.6	777.	x x .	x x .	x x .	x x .	x x x .	x
Ø 1550 mm	61.0"	147	7,010	11.0 / 24.2	771.	x x .	x x .	x x .	x x .	x x x .	x
Ø 1900 mm	74.8"	256	12,177	14.0 / 30.8	773.	x x .	x x .	x x .	x x .	x x x .	x
LED 24V CRI > 90 *CRI > 80		Warm-white Neutral-white Extra warm-white Extra warm-white Dimmable 0 - 10 V	3000 K (Standard) 4000 K (Optional) 2700 K (Optional) 2200 K* (Optional) (Standard)	30. 40. 27. 22. 51. 00.	x x x . x x x . x x x . x x x . x x x .	x x . x x . x x . x x . x x .	x x . x x . x x . x x . 51. 00.	x x . x x . x x . x x . x x .	x x x . x x x . x x x . x x x . x x x .	x x x x x	
Dimming		Dimmable 0 - 10 V DMX LUTRON (contact factory)	(Standard) (Optional) (Optional) (Optional) (Standard)	51. 00. 31. 00. 71. 00.	x x x . x x x . x x x .	x x . x x . x x .	51. 00. 31. 00. 71. 00.	x x . x x . x x .	x x x . x x x . x x x .	x x x	
Finishes			11 white (Optional) 22 aluminum polished 27 brush-finished aluminum 30 anthracite 32 crocodile black 33 sand silver fine textured		35 gold 36 brass 37 bronze fine textured 38 copper 10 black fine textured		XX Custom finish	x x x . x x . x x . x x .	x x x . x x . x x . x x .	x x x x	
Power Supply Cable (Standard)			000 without Mounting Version F Z 70 Silver		x x x . x x .	x x . x x .	x x . x x .	x x . x x .	x x . x x .	x x	

When using current carrying steel cables in Mounting Versions F, J leave this section blank

1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
 2) Weight of lights without remote technical unit or canopy.


TOCCATA




Housing: Pendant light with direct light distribution, 3/ 5 parts aluminum profile, with integrated acrylic cover.




Design: MARKUS BISCHOF

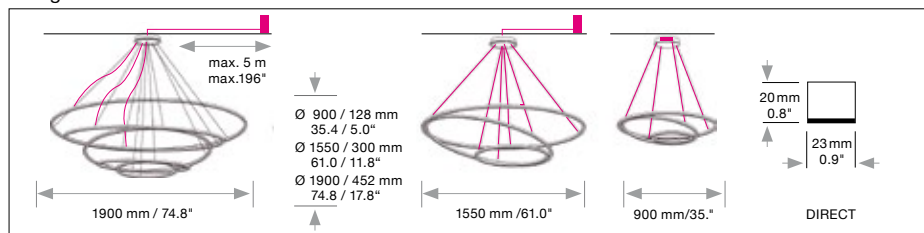


Mounting Version




4/6/14-point suspension with external power supply unit in suspended ceiling




Ø 1900 mm / 74.8"
14 suspensions through canopy and 3 power supply cables with external power supply unit in suspended ceiling



Ø 1550 mm / 61.0"
6 current-carrying steel cables with external power supply unit in suspended ceiling



Ø 900 mm / 35.4"
4 current-carrying steel cables. with power supply in canopy



Ø 900 mm / 35.4"
4 suspensions through canopy with external power supply unit in canopy

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

I / J = Distance of external power supply unit to light fixture max. 10m / 394".

F, E = Power supply unit in canopy Max. suspension height approx. 2.0 times diameter of light.

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---


Mounting version with steel cable length 5 m / 197" and power supply cable, length 2 x 5 m / 2 x 196" (1550, 1900)

Complete order number

Dimensions of external power supply units			
Typ	Size mm / inch	For use with Mounting Version	
	L W H		
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	Ø 900	A
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	Ø 1550	I, J, A
DE 3F	360 x 400 x 85 mm / 14.2 x 15.7 x 3.3"	Ø 1900	I, J, A

Dimensions of canopy			
Typ	Size mm / inch	For use with Mounting Version	
	Ø cover plate / body		
DB 290	Ø 290 / 260 mm / 11.4 x 10.2"	Ø 900	F, E
Canopy finish: white (11)			
DB 230S	Ø 230 / 210 mm / 9.0 x 8.3"	Ø 1550 / 1900	I, J
Base finish white (11), Cover white (11)			
If finish (22), Cover aluminum polished (22)			
contact factory for other finishes			
USA/Canada: Canopy mounts to 4" octagonal junction box.			

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**



Ceiling mounting version A (3x)

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

