






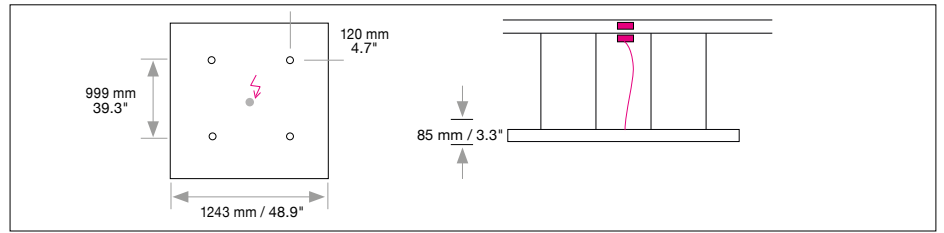

SKY


Housing: Aluminum profile frame, powder-coated in white with translucent foil (fire rating B1)
Design: SATTLER




Sizes	Size: L x W x H mm	Inches	LED Watt	Lumen ¹	Weight kg / lbs ²	Item No.	LED Row 1	Dimming	LED Row 2	Finish	Power supply cable	Mounting version
	LED full area 1243 x 1243 x 85	48.9 x 48.9 x 3.3"	175	16,500	28 / 61.7	182.	x x.	x x.	x x.	x x.	x x x.	x
	LED circumferential 1243 x 1243 x 85	48.9 x 48.9 x 3.3"	116	8588	28 / 61.7	183.	x x.	x x.	x x.	x x.	x x x.	x
LED 24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard:	Neutral-white	4000 K		x x x.	40.	x x.	x x.	x x.	x x x.	x
		Optional:	Warm-white	3000 K	x x x.	30.	x x.	x x.	x x.	x x x.	x	
			Extra warm-white	2700 K	x x x.	27.	x x.	x x.	x x.	x x x.	x	
			Tunable white*	2700 - 6500 K	x x x.	80.	x x.	x x.	x x.	x x x.	x	
			*Only available with DMX.									
Dimming		Standard:	0 - 10 V			x x x.	x x.	51.	x x.	x x.	x x x.	x
		Optional:	Lutron EcoSystem**		x x x.	x x.	91.	x x.	x x.	x x x.	x	
			DMX		x x x.	x x.	31.	x x.	x x.	x x x.	x	
						**Lutron EcoSystem driver only available with mounting version B above the ceiling/or remote mounted, and must be ordered separately.						
Finish						x x x.	x x.	x x.	x x.	12.	x x x.	x
		12 white, powder coated, similar RAL 9003										
Power supply cable						x x x.	x x.	x x.	x x.	x x.	Z70.	x
		Z 70 Silver										

SKY


Housing: Aluminum profile frame, powder-coated in white with translucent foil (fire rating B1)
Design: SATTLER

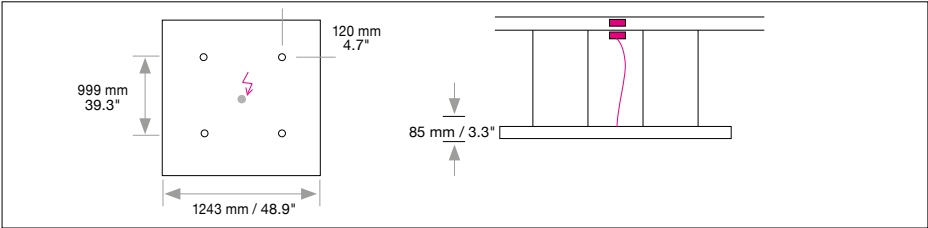

Mounting Version



4 point suspension with canopy in suspended ceiling.



4 point suspension with canopy.

B = Distance of external power supply unit to light fixture max. 10m / 394"

Including steel cable suspension 5000 mm / 197"
and power supply cable 5000 mm / 197"

Canopy:
Type/ Size mm / inch
Ø body / H
DBS 300 Ø 300 / 50 mm / 11.8 / 1.9"

Included with
Mounting version
B

Protective
rating
IP 20


Color: 12 white, similar RAL 9003, contact factory for other finishes
Canopy mounts to 4" octagonal junction box.

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
---	---	---	---	12.	Z70	B

Complete order number

Input voltage for all external power supply units and canopy is 120-277 VAC 47-63 Hz

Optional



Ceiling fixation included with mounting versions A, G

200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80 mm / 3.1" round metal cover. Powder coated in white, fine textured.
Applicable to mounting version A, G.