


SLIM INDIRECT

Housing: Circular aluminum profile with integrated acrylic cover upwards.
 Design: SATTLER

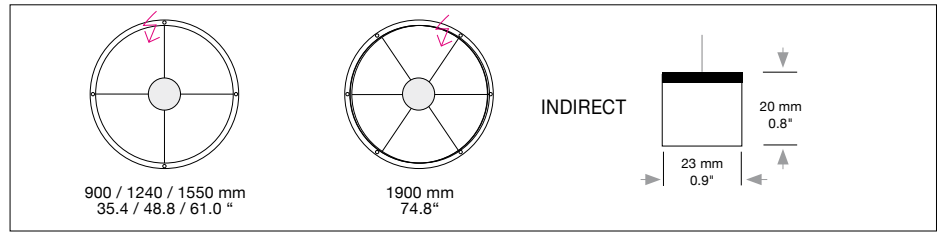

Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
Ø 900 mm	35.4"	55	2,574	3.5 / 7.7	705.	x x .	x x .	x x .	x x .	x x x .	x
Ø 1240 mm	48.8"	72	3,296	5.0 / 11.0	706.	x x .	x x .	x x .	x x .	x x x .	x
Ø 1550 mm	61.0"	88	3,597	5.5 / 12.1	707.	x x .	x x .	x x .	x x .	x x x .	x
Ø 1900 mm	74.8"	110	5,123	6.0 / 13.2	708.	x x .	x x .	x x .	x x .	x x x .	x

LED 24V CRI > 90 *CRI > 80		Warm-white Neutral-white Extra warm-white Extra warm-white	3000 K 4000 K 2700 K 2200 K*	((Standard)) (Optional) (Optional) (Optional)	x x x . x x x . x x x . x x x .	30. 40. 27. 22.	x x . x x . x x . x x .	x x . x x . x x . x x .	x x . x x . x x . x x .	x x x . x x x . x x x . x x x .	x x x x	
		RGB color control**	(Optional)	x x x .	60.	x x .	00.	x x .	x x x .	x		
		** (only in combination with dimming DMX, DALI)										

Dimming		Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)	(Standard) (Optional) (Optional)	x x x . x x x . x x x .	x x . x x . x x .	51. 31. 71.	00. 00. 00.	x x . x x . x x .	x x x . x x x . x x x .	x x x
----------------	--	--	---	-------------------------------	-------------------------	--	--	-------------------------	-------------------------------	-------------

Finishes		11 white	(Standard)		22 aluminum polished		30 anthracite		32 crocodile black		33 sand silver fine textured	(Optional)		35 gold		36 brass		37 bronze fine textured		38 copper		10 black fine textured	
		XX Custom finish		x x x .	x x .	x x .	x x .	x x .	. .	x x x .	x												


Power Supply Cable (Standard)	000 without Mounting Version F (Optional)					Z 70 Silver	Z 71 white	Z 72 grey	Z 73 black														

When using current carrying steel cables in Mounting Versions F, K, R, T leave this section blank


1) Net lumen output: Losses due to diffusers and reflectors are considered.
 Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
 2) Weight of lights without remote technical unit or canopy.

SLIM INDIRECT


Housing: Circular aluminum profile with integrated acrylic cover upwards.
Design: SATTLER

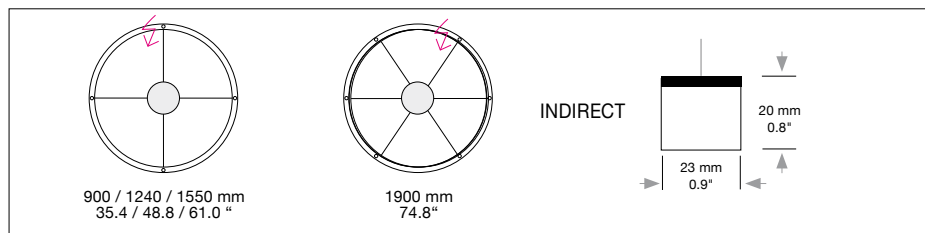


Mounting Version




up to Ø 1550 mm / 61.0"
4-point suspension
1900 mm / 74.8"
6-point suspension with external power supply unit in suspended ceiling




up to Ø 1550 mm / 61.0"
4-point suspension
1900 mm / 74.8"
6-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Not in combination with RGB




Suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.




Suspension with pendant canopy PB 366 and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"



Suspension with pendant canopy PB 366 and current-carrying steel cables.
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



Direct ceiling mounting
50mm / 1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".


S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118"; Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

Dimensions of external power supply units			
Typ	Size mm / inch	For use with Mounting Version	
	L W H		
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, R, K	

Input voltage for all external power supply units and canopy is
120 / 277 VAC 50/60 Hz

Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.




Dimensions of canopy (1 LED Stripe)			
Typ	Size mm / inch	For use with Mounting Version	
	Ø cover plate / body		
DB 230	Ø 230 / 210 mm / 9.5 x 8.3" up to size Ø 900 mm / 35.4"	B, E, F	
DB 290	Ø 290 / 260 mm / 11.4 x 10.2" up to size Ø 1550 mm / 61.0"	B, E, F	
DB 350	Ø 350 / 320 mm / 13.7 x 12.5" up to size Ø 1900 mm / 74.8"	B, E, F	
PB 366	Ø 90 H 366 mm / 3.5 x 14.4" up to size Ø 1550 / 61.0"	S, T	
PB 656	Ø 90 H 656 mm / 3.5 x 25.8" up to size Ø 1900 / 74.8"	S, T	

Optional



LED Spot Set of 2
2 x 4W, Light fixture and spots separat switching, not dimmable.

760.67.01.06.11. (white)
760.67.01.06.22. (polished)



Ceiling mounting version A, G
Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.

200.00.00.00.11. (white)

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution indirect



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

1) Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
2) Weight of lights without remote technical unit or canopy.