


SLIM OUT


Housing: Circular aluminum profile with integrated acrylic cover outwards
 Design: SATTLER

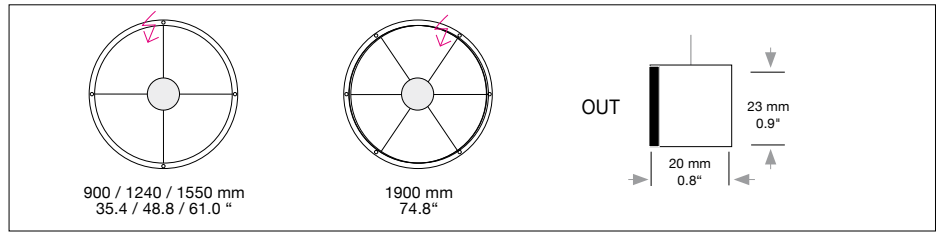

	Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
Sizes	Ø 900 mm	35.4"	51	5,300	3.5 / 7.7	723.	x x .	x x .	x x .	x x .	x x x .	x
	Ø 1240 mm	48.8"	71	7,390	5.0 / 11.0	724.	x x .	x x .	x x .	x x .	x x x .	x
	Ø 1550 mm	61.0"	88	9,200	5.5 / 12.1	725.	x x .	x x .	x x .	x x .	x x x .	x
	Ø 1900 mm	74.8"	108	11,300	6.0 / 13.2	726.	x x .	x x .	x x .	x x .	x x x .	x
LED 24V CRI > 90 *CRI > 80	 	Warm-white	3000 K	((Standard))	x x x .	30.	x x .	x x .	x x .	x x x .	x	
		Neutral-white	4000 K	(Optional)	x x x .	40.	x x .	x x .	x x .	x x x .	x	
		Extra warm-white	2700 K	(Optional)	x x x .	27.	x x .	x x .	x x .	x x x .	x	
		Extra warm-white	2200 K*	(Optional)	x x x .	22.	x x .	x x .	x x .	x x x .	x	
		RGB color control**		(Optional)	x x x .	60.	x x .	00.	x x .	x x x .	x	
** (only in combination with dimming DMX, DALI)												
Dimming		Dimmable 0 - 10 V		(Standard)	x x x .	x x .	51.	00.	x x .	x x x .	x	
		DMX (RGB possible)		(Optional)	x x x .	x x .	31.	00.	x x .	x x x .	x	
		LUTRON (contact factory)		(Optional)	x x x .	x x .	71.	00.	x x .	x x x .	x	
Finishes	 (Standard) 11 white (Optional)		22 aluminum polished									
			27 brush-finished aluminum									
			30 anthracite									
			32 crocodile black									
			33 sand silver fine textured									
			35 gold									
			36 brass									
	37 bronze fine textured											
	38 copper											
	10 black fine textured											
	XX Custom finish				x x x .	x x .	x x .	x x .	.	x x x .	x	
Power Supply Cable (Standard)	000 without Mounting Version F (Optional)		Z 70 Silver									
			Z 71 white									
			Z 72 grey									
			Z 73 black									
			Z 74 orange				x x x .	x x .	x x .	x x .	.	x
			Z 75 red									
			Z 76 green									
When using current carrying steel cables in Mounting Versions F, K, R, T leave this section blank												

SLIM OUT

Housing: Circular aluminum profile with integrated acrylic cover outwards
Design: SATTLER

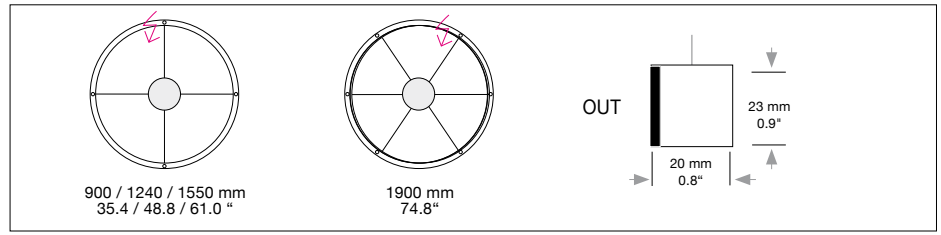

Mounting Version

			Standard 		
up to Ø 1550 mm / 61.0" 4-point suspension 1900 mm / 74.8" 6-point suspension with external power supply unit in suspended ceiling	up to Ø 1550 mm / 61.0" 4-point suspension 1900 mm / 74.8" 6-point suspension with external power supply unit in separate canopy	suspension through canopy	4 current-carrying steel cables. Not in combination with RGB	Suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.	Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"
Suspension with pendant canopy PB 366 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB.	Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling	Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.			

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.
X X X.	X X.	X X.	X X.	X X.	X X X	X

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118"; Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"


Dimensions of external power supply units			
Typ	Size mm / inch	For use with Mounting Version	
	L W H		
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, R, K	

Dimensions of canopy (1 LED Stripe)			
Typ	Size mm / inch	For use with Mounting Version	
	Ø cover plate / body		
DB 230	Ø 230 / 210 mm / 9.5 x 8.3" up to size Ø 900 mm / 35.4"	B, E, F	
DB 290	Ø 290 / 260 mm / 11.4 x 10.2" up to size Ø 1550 mm / 61.0"	B, E, F	
DB 350	Ø 350 / 320 mm / 13.7 x 12.5" up to size Ø 1900 mm / 174.8"	B, E, F	
PB 366	Ø 90 H 366 mm / 3.5 x 14.4" up to size Ø 1550 / 61.0"	S, T	
PB 656	Ø 90 H 656 mm / 3.5 x 25.8" up to size Ø 1900 / 74.8"	S, T	

Input voltage for all external power supply units and canopy is
120 / 277 VAC 50/60 Hz

Canopy finish: **white (11)** contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Optional



Ceiling mounting version A, G

200. 00. 00. 00. 11. (white)
Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.