

























## SOFT DELTA LIGHT + ACOUSTIC

Housing: Aluminum profile, integrated acrylic cover. Fabric covering as a light and acoustic diffuser.  
Design: SATTLER




	Size: L x W x H mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version							
<b>Sizes</b>	<b>1340 x 1309 x 80</b>	<b>52.7 x 51.5 x 3.1</b>	64	5,642	14 / 30.0	<b>850.</b>	x x.	x x.	x x.	x x.	x x x.	x							
	<b>1735 x 1717 x 80</b>	<b>68.3 x 67.5 x 3.1</b>	82	6,412	17 / 37.5	<b>862.</b>	x x.	x x.	x x.	x x.	x x x.	x							
<b>LED</b> 24V  CRI > 80			<b>Neutral-white</b> <b>Cold-white</b> <b>Warm-white</b> <b>Extra warm-white</b> <b>Extra warm-white</b> <b>Tunable white*</b> <b>RGB color control*</b> <b>RGB + Neutral-White*</b>	<b>4000 K</b> <b>5000 K</b> <b>3000 K</b> <b>2700 K</b> <b>2200 K</b> <b>2700 - 6500 K</b> <b>4000 K</b> <b>4000 K</b>	<b>(Standard)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b>	x x x. x x x. x x x. x x x. x x x. x x x. x x x. x x x.	<b>40.</b> <b>50.</b> <b>30.</b> <b>27.</b> <b>22.</b> <b>65.</b> <b>60.</b> <b>60.</b>	x x. x x. x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x. x x. x x.	x x x. x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x x x x x x							
<b>Dimming</b>			<b>Dimmable 0 - 10 V</b> <b>DMX (RGB possible)</b> <b>LUTRON (contact factory)</b>		<b>(Standard)</b> <b>(Optional)</b> <b>(Optional)</b>	x x x. x x x. x x x.	x x. x x. x x.	<b>51.</b> <b>31.</b> <b>71.</b>	<b>00.</b> <b>00.</b> <b>00.</b>	x x. x x. x x.	x x x. x x x. x x x.	x x x							
<b>Finishes</b>	 <b>11</b> white (Standard)	(Optional)	 <b>22</b> aluminum polished	 <b>30</b> anthracite	 <b>27</b> brush-finished aluminum	 <b>32</b> crocodile black	 <b>33</b> sand silver fine textured	 <b>35</b> gold	 <b>36</b> brass	 <b>37</b> bronze fine textured	 <b>38</b> copper	 <b>10</b> black fine textured	 <b>40</b> brass patinated	 <b>42</b> bronze patinated	 <b>44</b> wood veneer, white borders	 <b>XX</b> Custom finish	x x x. x x. x x. x x. x x x.	x x x. x x. x x. x x. x x x.	x x x x x
<b>Power Supply Cable</b>	 <b>Z 70</b> Silver (Standard)	(Optional)	 <b>Z 71</b> white	 <b>Z 72</b> grey	 <b>Z 73</b> black	 <b>Z 74</b> orange	 <b>Z 75</b> red	 <b>Z 76</b> green									x x x. x x. x x. x x. x x x.	x x x. x x. x x. x x. x x x.	x x x x x

1) Net lumen output: Losses due to diffusers and reflectors are considered.  
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.  
2) Weight of lights without remote technical unit or canopy.


## SOFT DELTA LIGHT + ACOUSTIC




Housing: Aluminum profile, integrated acrylic cover. Fabric covering as a light and acoustic diffuser.  
Design: SATTLER

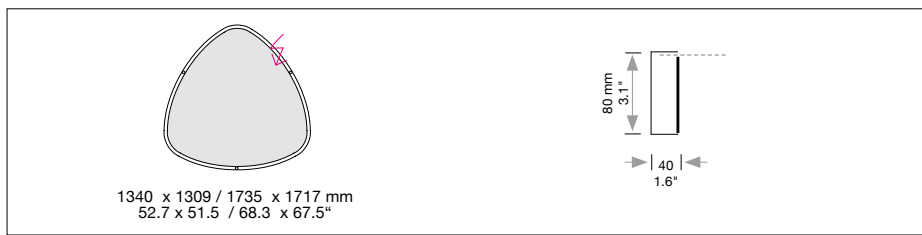


### Mounting Version




3-point suspension with external power supply unit in suspended ceiling




3-point suspension with external power supply unit in separate canopy




suspension through canopy




3 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB




Suspension with pendant canopy PB 366 and steel cables  
(a) 5000 mm / 196.8" +  
(b) 3000 mm / 118.1"




Suspension with pendant canopy PB 366 and current-carrying steel cables.  
(a) 5000 mm / 196.8" +  
(b) 3000 mm / 118.1"  
Not in combination with RGB.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension point as clamping unit with 3 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, H = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture


Including steel cable suspension 5000mm / 197" ; Version F, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units (1 LED Stripe)			
Typ	Size mm / inch	For use with Mounting Version	
	L W H		
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, K	


Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**



Dimensions of canopy (1 LED Stripe)			
Typ	Size mm / inch	For use with Mounting Version	
	Ø cover plate / body		
DB 290	Ø 290 / 260 mm / 11.4 x 10.2" size 1340 x 1309 mm	B, E, F, H	
DB 350	Ø 350 / 320 mm / 13.7 x 12.5" size 1735 x 1717 mm	B, E, F, H	
PB 366	Ø 90 H 366 mm / 13.7 x 12.5"	S, T	

Canopy finish: white (11) contact factory for other finishes  
USA/Canada: Canopy mounts to 4" octagonal junction box.

### Optional



Ceiling fixation for mounting version A

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

## SATTLER

410 381 1497 answers@inter-lux.com  
inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution direct



Conforms to UL-STD 1598  
Certified to CSA-STD C22.2  
No.250.0-08

1) Net lumen output: Losses due to diffusers and reflectors are considered.  
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.  
2) Weight of lights without remote technical unit or canopy.