


SOFT DELTA


Housing: Aluminum profile with integrated or L-shaped opal diffuser
 Design: SATTLER

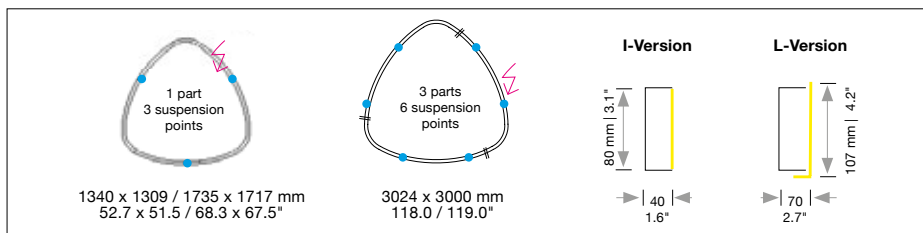


Sizes	Size: L x W x H mm	Inches	LED Watt	Lumen ¹	Weight kg / lbs ²	Item No.	LED Row 1	Dimming	LED Row 2	Finish	Power supply cable	Mounting version
I-Version	1340 x 1309 x 80	52.7 x 51.5 x 3.1	83	5624	9 / 20.0	849.	x x .	x x .	x x .	x x .	x x x .	x
	1735 x 1717 x 80	68.3 x 67.5 x 3.1	107	7297	12 / 26.5	861.	x x .	x x .	x x .	x x .	x x x .	x
	3024 x 3000 x 80	119.0 x 118.1 x 3.1	189	13,226	27 / 59.5	863.	x x .	x x .	x x .	x x .	x x x .	x
L-Version	1340 x 1309 x 107	52.7 x 51.5 x 4.2	83	5944	14 / 30.0	848.	x x .	x x .	x x .	x x .	x x x .	x
	1735 x 1717 x 107	68.3 x 67.5 x 4.2	107	7623	17 / 37.5	860.	x x .	x x .	x x .	x x .	x x x .	x
LED 24V CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours	Standard: Neutral-white 4000 K Optional: Natural-white 3500 K Warm-white 3000 K Extra warm-white 2700 K Tunable white* 2700 - 6500 K RGB color control* RGB + Neutral-White* 4000 K *Only available with DMX. Combinations up to two rows of LED possible.		x x x .	40.	x x .	x x .	x x .	x x x .	x			
			x x x .	35.	x x .	x x .	x x .	x x x .	x			
			x x x .	30.	x x .	x x .	x x .	x x x .	x			
			x x x .	27.	x x .	x x .	x x .	x x x .	x			
			x x x .	80.	x x .	x x .	x x .	x x x .	x			
			x x x .	60.	x x .	00.	x x .	x x x .	x			
Dimming	Standard: 0 - 10 V Optional: Lutron EcoSystem** DMX First digit indicates Dimming protocol. Second digit indicates number of rows of LED. Codes shown with 1x row of LED (Standard). For 2x rows of LED replace the second digit accordingly. **Lutron EcoSystem driver must be ordered separately and remote mounted with mounting versions A, G, K, R.	x x x .	x x .	51.	x x .	x x .	x x x .	x				
		x x x .	x x .	91.	x x .	x x .	x x x .	x				
		x x x .	x x .	31.	x x .	x x .	x x x .	x				
Finish	Standard: 12 white, powder coated, similar to RAL 9003 Optional (Powder coated): 10 black fine textured 11 white, similar to RAL 9010 30 anthracite fine textured 32 crocodile black 33 sand silver fine textured 34 bronze satined 35 gold 36 brass 37 bronze fine textured 38 copper Optional (Premium): 22 aluminum polished 27 brush-finished aluminum		x x x .	x x .	x x .	x x .	---	x x x .	x			
Power supply cable	Standard: Z 70 silver Without power cable 000 Current-carrying F, R, T, K Optional: Z 71 white Z 73 black		x x x .	x x .	x x .	x x .	x x .	---	x			

SOFT DELTA


Housing: Aluminum profile with integrated or L-shaped opal diffuser
 Design: SATTLER

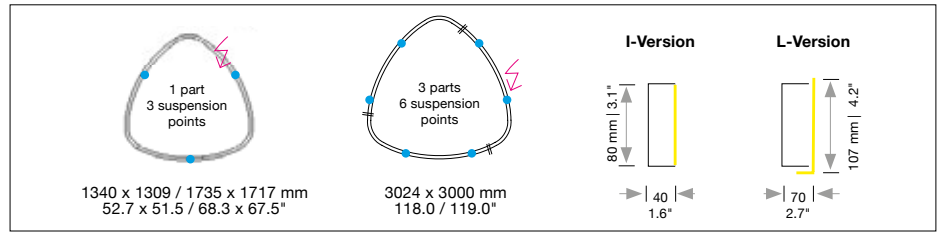


Mounting Version




3/6-point suspension with external power supply unit in suspended ceiling.




3/6-point suspension with external power supply unit in separate canopy.




Up to 1735 x 1717 mm / 68.3 x 67.6" 3 steel cables. Suspension through canopy.




3 current-carrying steel cables suspension through canopy. Only 1 strip LED possible. Not in combination with RGB.




3 Current-carrying steel cables and cavity wall box. Not in combination with RGB. Includes 1 ceiling fixation per suspension cable.




Up to 1735 x 1717 mm / 68.3 x 67.6" Suspension with pendant canopy PB 355 / PB 652 and **3 steel cables** (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Recommended ceiling height greater than 25 ft.




Suspension with pendant canopy PB 375 and 3 current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB. Recommended ceiling height greater than 25 ft.



Direct ceiling mounting 3/6 points (white) 50 mm / 1.9" with external power supply unit in suspended ceiling.



Direct ceiling mounting 3/6 points (white) 50 mm / 1.9" with external power supply unit in separate canopy.



Suspension point as clamping unit with 3 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X	X X	X X	X X	X X	X X X	-

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394"

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

F, R, T, K = Only for 1340 x 1309 mm / 52.7 x 51.5"

Including steel cable suspension 5000 mm / 197" ; Version S, T 5000 / 3000 mm / 197"/118" and/or power supply cable 5000 mm / 197"; Version F, R 3000 mm / 118"



--	--	--	--	--	--	--	--	--	--	--	--

Complete order number


Power supply units: (1 LED row)			
Type / Size mm / inch	L x W x H	Included with Mounting version	Protective rating
DE 1F	363 / 143 / 56 mm / 14.2 / 5.6 / 2.2"	A, G, R, K	IP 20
DE 2F	363 / 283 / 56 mm / 14.2 / 11.1 / 2.2"	A, G (size 1735 x 1717 mm)	IP 20
DE 3F	360 / 400 / 85 mm / 14.2 / 15.7 / 3.3"	A, G (size 3024 x 3000 mm)	IP 20

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**

Canopy: (1 LED row)			
Type / Size mm / inch	Ø cover plate / body / H	Included with Mounting version	Protective rating
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (1340 x 1309 mm)	IP 20
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, H (1735 x 1717 mm) (3024 x 3000 mm)	IP 20
DB 510	Ø 45 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	B, H (3024 x 3000 mm)	IP 20
PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S, T (1340 x 1309 mm)	IP 20
PB 652	Ø 90 H 652 mm / 3.5 x 25.7"	S (1735 x 1717 mm)	IP 20
DB 145	Ø 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	K (1340 x 1309 mm)	IP 20

Color: 12 white, similar RAL 9003, contact factory for other finishes
 Canopy mounts to 4" octagonal junction box.

Optional



Ceiling fixation included with mounting versions A, G

200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80 mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.