


SOFT DELTA

Housing: Aluminum profile, integrated (I) or L-shaped acrylic cover (L)
 Design: SATTLER

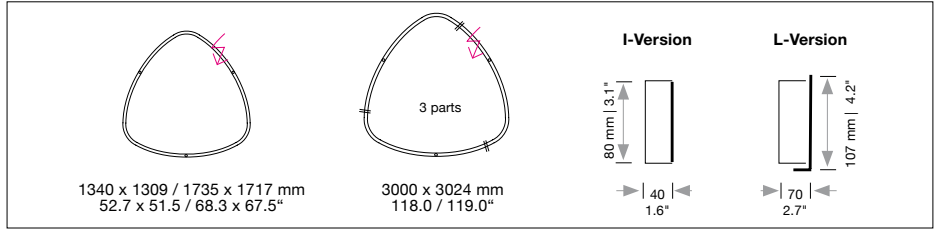


Sizes	Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version				
I-Version	1340 x 1309 x 80	52.7 x 51.5 x 3.1	64	5,862	14 / 30.0	849.	x x .	x x .	x x .	x x .	x x x .	x				
	1735 x 1717 x 80	68.3 x 67.5 x 3.1	82	6,657	17 / 37.5	861.	x x .	x x .	x x .	x x .	x x x .	x				
	3024 x 3000 x 80	119.0 x 118.1 x 3.1	145	11,772	27 / 59.5	863.	x x .	x x .	x x .	x x .	x x x .	x				
L-Version	1340 x 1309 x 107	52.7 x 51.5 x 4.2	64	7,767	14 / 30.0	848.	x x .	x x .	x x .	x x .	x x x .	x				
	1735 x 1717 x 107	68.3 x 67.5 x 4.2	82	6,883	17 / 37.5	860.	x x .	x x .	x x .	x x .	x x x .	x				
LED 24V CRI > 80			Neutral-white	4000 K	(Standard)	x x x .	40.	x x .	x x .	x x .	x x x .	x				
			Cold-white	5000 K	(Optional)	x x x .	50.	x x .	x x .	x x .	x x x .	x				
			Warm-white	3000 K	(Optional)	x x x .	30.	x x .	x x .	x x .	x x x .	x				
			Extra warm-white	2700 K	(Optional)	x x x .	27.	x x .	x x .	x x .	x x x .	x				
			Extra warm-white	2200 K	(Optional)	x x x .	22.	x x .	x x .	x x .	x x x .	x				
			Tunable white*	2700 - 6500 K	(Optional)	x x x .	65.	x x .	x x .	x x .	x x x .	x				
			RGB color control*		(Optional)	x x x .	60.	x x .	00.	x x .	x x x .	x				
RGB + Neutral-White*	4000 K	(Optional)	x x x .	60.	x x .	40.	x x .	x x x .	x							
*only in combination with dimming DMX Combinations up to two strips of LED possible																
Dimming			Dimmable 0 - 10 V		(Standard)	x x x .	x x .	51.	00.	x x .	x x x .	x				
			DMX (RGB possible)		(Optional)	x x x .	x x .	31.	00.	x x .	x x x .	x				
			LUTRON (contact factory)		(Optional)	x x x .	x x .	71.	00.	x x .	x x x .	x				
Finishes		(Standard)	11 white													
			(Optional)	22 aluminum polished	30 anthracite	27 brush-finished aluminum	32 crocodile black	33 sand silver fine textured								
			35 gold	36 brass	37 bronze fine textured	38 copper	10 black fine textured									
			40 brass patinated	42 bronze patinated	44 wood veneer, white borders	XX Custom finish		x x x .	x x .	x x .	x x .	. .	x x x .	x		
			Power Supply Cable		(Standard)	Z 70 Silver										
						(Optional)	Z 71 white	Z 72 grey	Z 73 black							
						Z 74 orange	Z 75 red	Z 76 green								
When using current carrying steel cables in Mounting Versions F, K, T leave this section blank																


1) Net lumen output: Losses due to diffusers and reflectors are considered.
 Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
 2) Weight of lights without remote technical unit or canopy.

SOFT DELTA


Housing: Aluminum profile, integrated (I) or L-shaped acrylic cover (L)
 Design: SATTLER

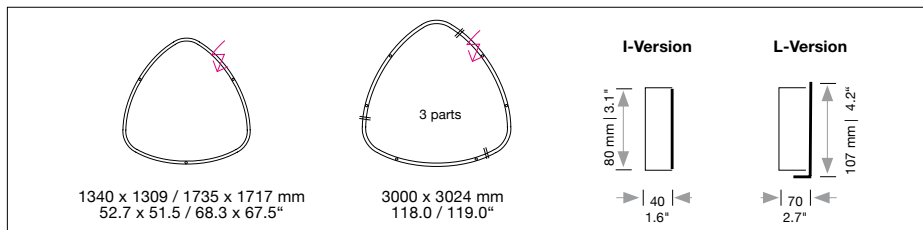


Mounting Version




3/6-point suspension with external power supply unit in suspended ceiling




3/6-point suspension with external power supply unit in separate canopy




Up to 1735 x 1717 suspension through canopy




Up to 1735 x 1717 3 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB




Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"




Suspension with pendant canopy PB 366 and current-carrying steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Up to 1735 x 1717. Suspension point as clamping unit with 3 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number


A, B, G, H = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197" ; Version F, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"


Typ	Size mm / inch			For use with Mounting Version
	L	W	H	
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, K		
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	A, G, K		
	for size 3000 x 3024 mm			

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**



Typ	Size mm / inch		For use with Mounting Version
	Ø cover plate	Ø body	
DB 290	Ø 290 / 260 mm / 11.4 x 10.2"		B, E, F, H
	size 1340 x 1309 mm		
DB 350	Ø 350 / 320 mm / 13.7 x 12.5"		B, E, F, H
	size 1735 x 1717 and 3000 x 3024 mm		
PB 366	Ø 90 H 366 mm / 13.7 x 12.5"		S, T
Canopy finish: white (11) contact factory for other finishes			
USA/Canada: Canopy mounts to 4" octagonal junction box.			

Optional



Ceiling fixation for mounting version A

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.