


SOFT QUADRA

LIGHT + ACOUSTIC

Housing: Aluminum profile, integrated acrylic cover. Fabric covering as a light and acoustic diffuser.
 Design: SATTLER

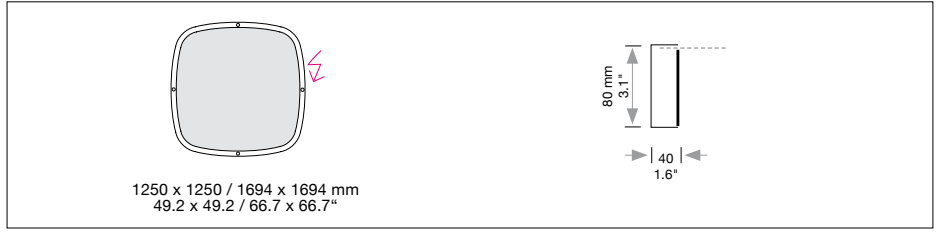

Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version											
Sizes	1250 x 1250 x 80 1694 x 1694 x 80	49.2 x 49.2 x 3.1 66.7 x 66.7 x 3.1	68 89	5,220 7,106	15 / 33.1 17 / 37.5	802. 814.	x x . x x .	x x . x x .	x x . x x .	x x . x x .	x x											
LED 24V CRI > 80		Neutral-white Cold-white Warm-white Extra warm-white Extra warm-white Tunable white* RGB color control* RGB + Neutral-White*	4000 K 5000 K 3000 K 2700 K 2200 K 2700 - 6500 K 4000 K 4000 K	(Standard) (Optional) (Optional) (Optional) (Optional) (Optional) (Optional) (Optional)	x x x . x x x . x x x . x x x . x x x . x x x . x x x . x x x .	40. 50. 30. 27. 22. 65. 60. 60.	x x . x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x . x x .	x x x . x x x . x x x . x x x . x x x . x x x . x x x . x x x .	x x x x x x x x												
Dimming		Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)		(Standard) (Optional) (Optional)	x x x . x x x . x x x .	x x . x x . x x .	51. 31. 71.	00. 00. 00.	x x . x x . x x .	x x x . x x x . x x x .	x x x											
Finishes (Standard)		11 white		22 aluminum polished		30 anthracite		27 brush-finished aluminum		32 crocodile black		33 sand silver fine textured										
		(Optional)		35 gold		36 brass		37 bronze fine textured		38 copper		10 black fine textured										
Power Supply Cable Standard		Z 70 Silver		Z 71 white		Z 72 grey		Z 73 black														
Standard (for mounting versions F, K, T):		Z 74 orange		Z 75 red		Z 76 green																

8.1220 SOFT QUADRA LIGHT + ACOUSTIC

SATTLER

410 381 1497 answers@inter-lux.com
 inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution direct



Conforms to UL-STD 1598
 Certified to CSA-STD C22.2
 No.250.0-08


1) Net lumen output: Losses due to diffusers and reflectors are considered.
 Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
 2) Weight of lights without remote technical unit or canopy.

SOFT QUADRA LIGHT + ACOUSTIC


Housing: Aluminum profile, integrated acrylic cover. Fabric covering as a light and acoustic diffuser.
Design: SATTLER




Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB




Suspension with pendant canopy PB 366 and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"




Suspension with pendant canopy PB 366 and current-carrying steel cables.
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, H = Distance of external power supply unit to light fixture max. 10m / 394"

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm / 197" ; Version F, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"


X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units (1 LED Stripe)

Typ	Size mm / inch	For use with Mounting Version
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, K

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**




Dimensions of canopy (1 LED Stripe)

Typ	Size mm / inch	For use with Mounting Version
DB 290	Ø 290 / 260 mm / 11.4 x 10.2" size 1250 x 1250 mm	B, E, F, H
DB 350	Ø 350 / 320 mm / 13.7 x 12.5" size 1694 x 1694 mm	B, E, F, H
PB 366	Ø 90 H 366 mm / 13.7 x 12.5"	S, T

Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Optional Ceiling fixation for mounting version A



200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.