













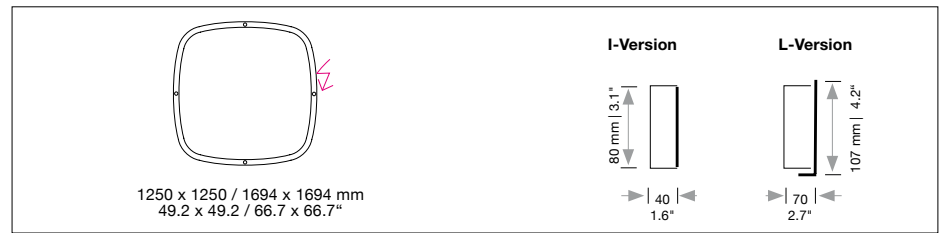









SOFT QUADRA

Housing: Aluminum profile, integrated (I) or L-shaped acrylic cover (L)
Design: SATTLER



Sizes	Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
I -Version	1250 x 1250 x 80	49.2 x 49.2 x 3.1	68	5,423	15 / 33.1	801.	x x .	x x .	x x .	x x .	x x x .	x
	1694 x 1694 x 80	66.7 x 66.7 x 3.1	89	7,359	17 / 37.5	813.	x x .	x x .	x x .	x x .	x x x .	x
L-Version	1250 x 1250 x 107	49.2 x 49.2 x 4.2	68	5,855	15 / 33.1	800.	x x .	x x .	x x .	x x .	x x x .	x
	1694 x 1694 x 107	66.7 x 66.7 x 4.2	89	7,923	17 / 37.5	812.	x x .	x x .	x x .	x x .	x x x .	x
LED 24V CRI > 80	 	Neutral-white	4000 K	(Standard)	x x x .	40.	x x .	x x .	x x .	x x x .	x	
		Cold-white	5000 K	(Optional)	x x x .	50.	x x .	x x .	x x .	x x x .	x	
		Warm-white	3000 K	(Optional)	x x x .	30.	x x .	x x .	x x .	x x x .	x	
		Extra warm-white	2700 K	(Optional)	x x x .	27.	x x .	x x .	x x .	x x x .	x	
		Extra warm-white	2200 K	(Optional)	x x x .	22.	x x .	x x .	x x .	x x x .	x	
		Tunable white*	2700 - 6500 K	(Optional)	x x x .	65.	x x .	x x .	x x .	x x x .	x	
		RGB color control*		(Optional)	x x x .	60.	x x .	00.	x x .	x x x .	x	
		RGB + Neutral-White*	4000 K	(Optional)	x x x .	60.	x x .	40.	x x .	x x x .	x	
		*(only in combination with dimming DMX) Combinations up to two strips of LED possible										
Dimming		Dimmable 0 - 10 V		(Standard)	x x x .	x x .	51.	00.	x x .	x x x .	x	
		DMX (RGB possible)		(Optional)	x x x .	x x .	31.	00.	x x .	x x x .	x	
		LUTRON (contact factory)		(Optional)	x x x .	x x .	71.	00.	x x .	x x x .	x	
Finishes	 (Optional)											
												
		22 aluminum polished	30 anthracite	27 brush-finished aluminum	32 crocodile black	33 sand silver fine textured						
		35 gold	36 brass	37 bronze fine textured	38 copper	10 black fine textured						
Power Supply Cable Standard Standard (for mounting versions F, K, T):	 Optional      	Z 70 Silver		Z 71 white	Z 72 grey	Z 73 black						
		Z 74 orange		Z 75 red	Z 76 green							
		000 steel current-carrying suspension cables										
		Separate power cable not required										

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

1) Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
2) Weight of lights without remote technical unit or canopy.

IP 20



Light distribution
direct / indirect




Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

SOFT QUADRA


Housing: Aluminum profile, integrated (I) or L-shaped acrylic cover (L)
Design: SATTLER




Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Only 1 strip LED possible. Not in combination with RGB




Suspension with pendant canopy PB 366 and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"




Suspension with pendant canopy PB 366 and current-carrying steel cables.
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.


A, B, G, H = Distance of external power supply unit to light fixture max. 10m / 394".

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture



Including steel cable suspension 5000mm / 197" ; Version F, S, T 5000 / 3000mm / 197"/118" and/or power supply cable 5000mm / 197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

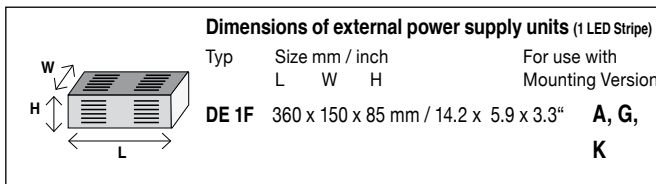

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

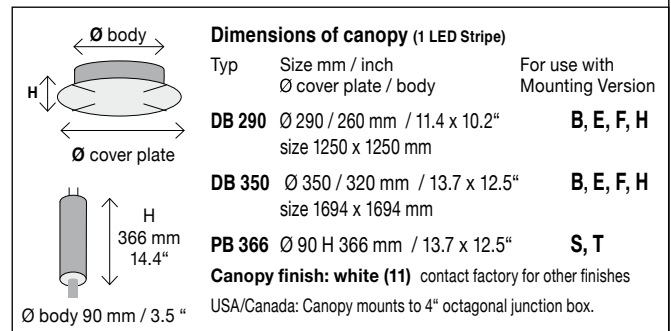


Optional



LED spot in canopy
4W/20°-40°, 400 Lumen (order separately)

762. 67. 01. 04. 11. (white)



Ceiling fixation for mounting version A

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.