



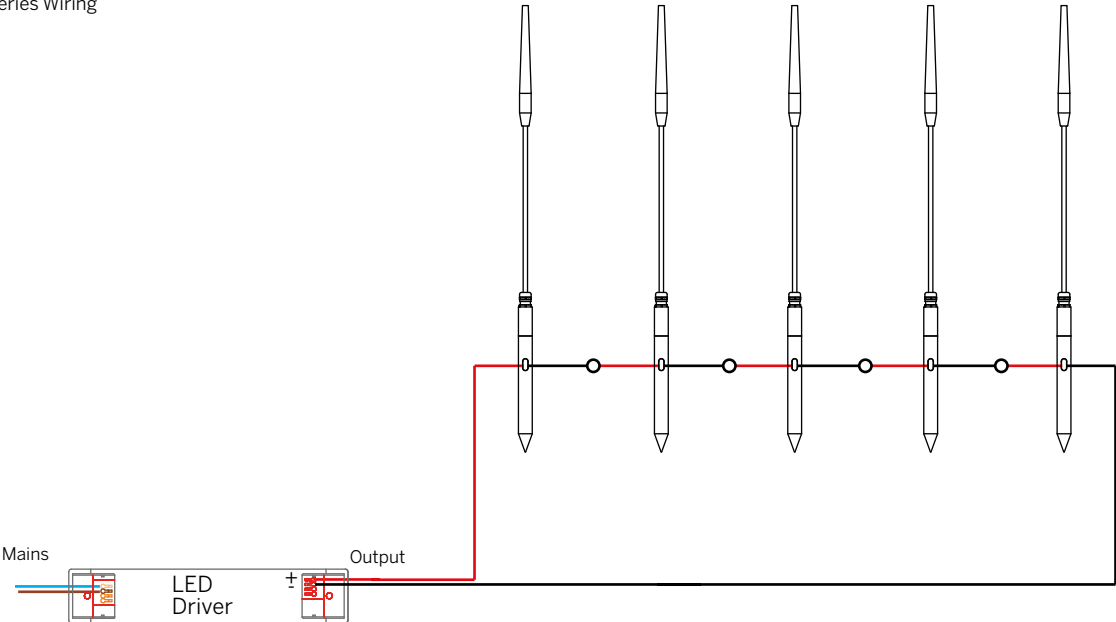


Photometry

Fitting	Polar diagram	LED	Supply	Power	Delivered output
 Diffused acrylic		95 CRI, 3000K	Constant Current 500mA	1.4W	74.9lm
 Clear acrylic		95 CRI, 3000K	Constant Current 500mA	1.4W	96.3lm

Wiring

Series Wiring



Note that while constant current light sources can be wired in series, the number of fittings that can be wired in series is limited by the forward voltage and wattage of the LED.

Each Firefly is supplied with 1 x Star LEDs which have a total forward voltage of 2.85V and wattage of 1.4W when driven at 500mA.

IP68 connectors recommended. Driver specified separately.