


Wiring

Constant Current (remote LED driver) for DALI, 0-10V or Mains

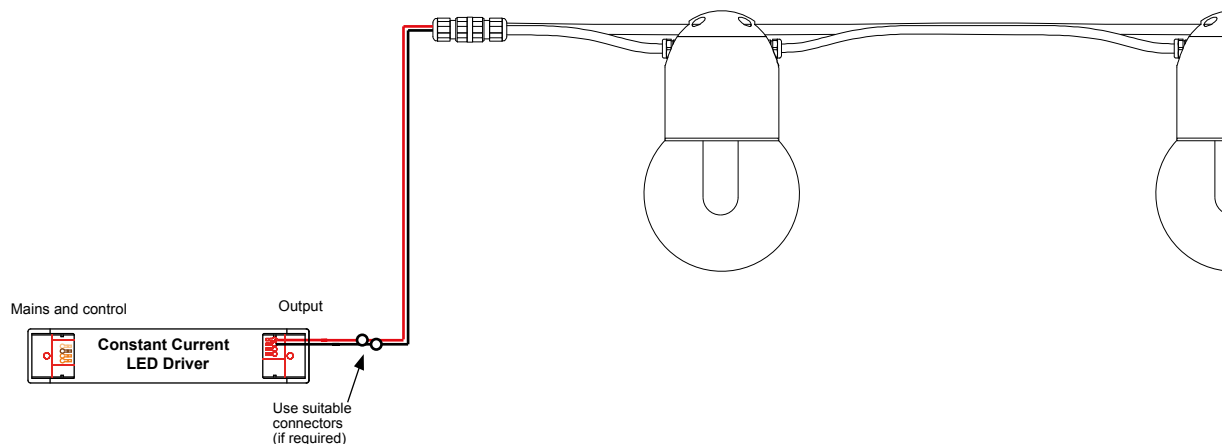


Note that while constant current light sources can be wired in series, the number of fittings that can be wired in series is limited by the forward voltage and wattage of the LED. When using the standard LED the maximum number of LEDs in series in a single circuit is 5.


Max string length is 40m (130ft), subject to Volt drop calculations and driver manufacturers recommendations. Drivers specified separately.

Less than 5 heads in a circuit uses 2 core, 5 - 10 can use 4 core LV to enable 2 x series runs.

Ten units powered via two drivers

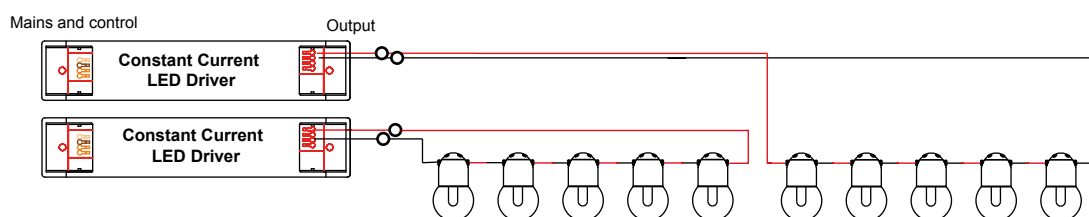

Ten units powered via a single driver using 4 core cable.

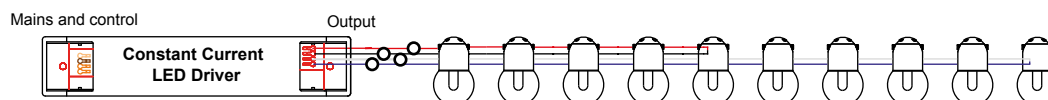

Less than 5 heads uses 2 core, 5 - 10 uses 4 core LV to enable 2 x series runs.