


TOCCATA



Housing: Pendant light with direct light distribution, 3/ 5 parts aluminum profile, with integrated acrylic cover.

Design: MARKUS BISCHOF

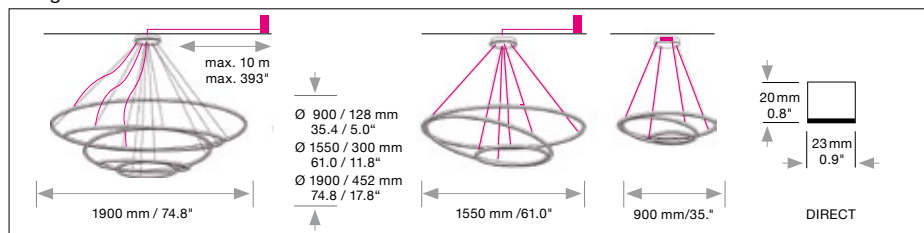

Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
Sizes											
Ø 900 mm	35.4"	85	4,056	8.0 / 17.6	777.	X X.	X X.	X X.	X X.	X X X.	X
Ø 1550 mm	61.0"	147	7,010	11.0 / 24.2	771.	X X.	X X.	X X.	X X.	X X X.	X
Ø 1900 mm	74.8"	256	12,177	14.0 / 30.8	773.	X X.	X X.	X X.	X X.	X X X.	X
LED 24V CRI > 90 *CRI > 80		Warm-white	3000 K	(Standard)	X X X.	30.	X X.	X X.	X X.	X X X.	X
		Neutral-white	4000 K	(Optional)	X X X.	40.	X X.	X X.	X X.	X X X.	X
		Extra warm-white	2700 K	(Optional)	X X X.	27.	X X.	X X.	X X.	X X X.	X
		Extra warm-white	2200 K*	(Optional)	X X X.	22.	X X.	X X.	X X.	X X X.	X
		Dimmable 0 - 10 V		(Standard)	X X X.	X X.	51.	00.	X X.	X X X.	X
Dimming		Dimmable 0 - 10 V		(Standard)	X X X.	X X.	51.	00.	X X.	X X X.	X
		DMX		(Optional)	X X X.	X X.	31.	00.	X X.	X X X.	X
		LUTRON (contact factory)		(Optional)	X X X.	X X.	71.	00.	X X.	X X X.	X
Finishes											
(Standard)		(Optional)									
	11 white		22 aluminum polished	27 brush-finished aluminum	30 anthracite	32 crocodile black	33 sand silver fine textured				
			35 gold	36 brass	37 bronze fine textured	38 copper	10 black fine textured				
					XX Custom finish	X X X.	X X.	X X.	X X.	X X X.	X
Power Supply Cable (Standard)											
	000 without Mounting Version F		Z 70 Silver								
					X X X.	X X.	X X.	X X.	X X.	X X X.	X

When using current carrying steel cables in Mounting Versions F, J leave this section blank

1) Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
2) Weight of lights without remote technical unit or canopy.


TOCCATA




Housing: Pendant light with direct light distribution, 3/ 5 parts aluminum profile, with integrated acrylic cover.




Design: MARKUS BISCHOF

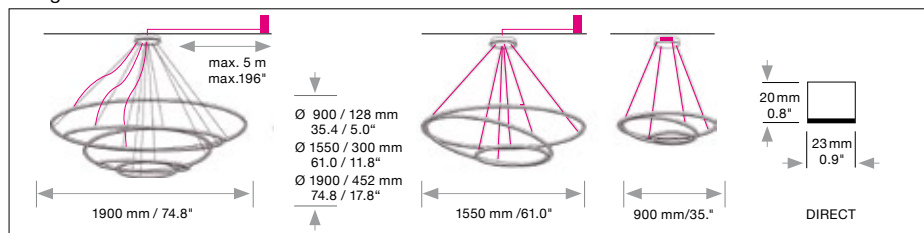


Mounting Version




4/6/14-point suspension with external power supply unit in suspended ceiling




Ø 1900 mm / 74.8"
14 suspensions through canopy and 3 power supply cables with external power supply unit in suspended ceiling



Ø 1550 mm / 61.0"
6 current-carrying steel cables with external power supply unit in suspended ceiling



Ø 900 mm / 35.4"
4 current-carrying steel cables. with power supply in canopy



Ø 900 mm / 35.4"
4 suspensions through canopy with external power supply unit in canopy

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.


I / J = Distance of external power supply unit to light fixture max. 10m / 394".



F, E = Power supply unit in canopy Max. suspension height approx. 2.0 times diameter of light.

Mounting version with steel cable length 5 m / 197" and power supply cable, length 2 x 5 m / 2 x 196" (1550, 1900)


X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units			
Typ	Size mm / inch		For use with Mounting Version
	L	W H	
 DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	Ø 900	A
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	Ø 1550	I, J, A
DE 3F	360 x 400 x 85 mm / 14.2 x 15.7 x 3.3"	Ø 1900	I, J, A

Dimensions of canopy			
Typ	Size mm / inch		For use with Mounting Version
	Ø body	Ø cover plate / body	
 DB 290	Ø 290 / 260 mm / 11.4 x 10.2"	Ø 900	F, E
Canopy finish: white (11)			
 DB 230S	Ø 230 / 210 mm / 9.0 x 8.3"	Ø 1550 / 1900	I, J
Base finish white (11), Cover white (11)			
If finish (22), Cover aluminum polished (22)			
contact factory for other finishes			
USA/Canada: Canopy mounts to 4" octagonal junction box.			

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**



Ceiling mounting version A (3x)

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

