


## TRIS

Housing: Aluminum profile with acrylic cover on the inside  
 Design: JÜRGEN BECKERT

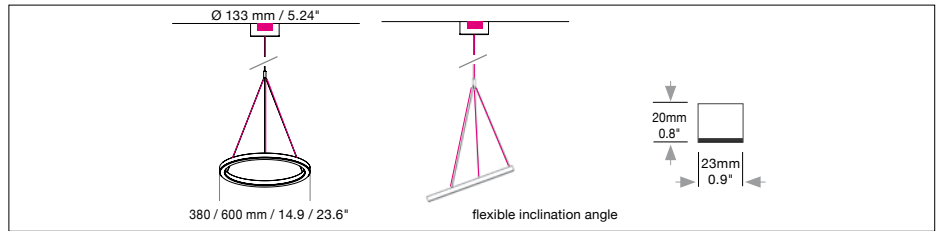

	Size: Ø mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version				
<b>Sizes</b>	Ø 380 mm	14.9"	22	1,021	2.5 / 5.5	<b>582.</b>	X X.	X X. X X.	X X.	X X X.	X				
	Ø 600 mm	23.6"	33	1,768	3.0 / 6.6	<b>583.</b>	X X.	X X. X X.	X X.	X X X.	X				
<b>LED</b> 24V CRI > 90 CRI > 80*		<b>Warm-white</b>	<b>3000 K</b>	<b>(Standard)</b>	X X X.	<b>30.</b>	X X. X X.	X X.	X X X.	X					
		<b>Neutral-white</b>	<b>4000 K</b>	<b>(Optional)</b>	X X X.	<b>40.</b>	X X. X X.	X X.	X X X.	X					
		<b>Extra warm-white</b>	<b>2700 K</b>	<b>(Optional)</b>	X X X.	<b>27.</b>	X X. X X.	X X.	X X X.						
		<b>Extra warm-white</b>	<b>2200 K*</b>	<b>(Optional)</b>	X X X.	<b>22.</b>	X X. X X.	X X.	X X X.	X					
<b>Dimming</b>		<b>Without Dimmer</b>		<b>(Standard)</b>	X X X.	X X.	<b>01. 00.</b>	X X.	X X X.	X					
		<b>Dimmable 0 - 10 V</b>		<b>(Optional)</b>	X X X.	X X.	<b>51. 00.</b>	X X.	X X X.	X					
<b>Finishes</b>	(Standard) <b>11</b> white	(Optional) <b>22</b> aluminum polished	<b>30</b> anthracite	<b>32</b> crocodile black	<b>33</b> sand silver fine textured	<b>35</b> gold									
		<b>36</b> brass	<b>37</b> bronze fine textured	<b>38</b> copper	<b>10</b> black fine textured	<b>XX</b> Custom finish	X X X.	X X.	X X. X X.	<b>.</b>	X X X.	X			
		<b>Mounting Version</b>						<b>(Standard)</b>	X X X.	X X.	X X. X X.	X X.	X X X.	<b>F</b>	
		<b>Mounting version with 3 current-carrying steel cables length 2000mm</b>													
		<b>Dimensions of canopy</b> Type      Size mm / inch Ø cover plate / body      For use with Mounting Version <b>DB 140</b> 140 / 133 mm / 5.51 / 5.24" <b>F</b> <b>Canopy finish same as housing finish</b>  USA/Canada: Canopy mounts to 4" octagonal junction box.													

Complete order number

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.  
 2) Weight of lights without remote technical unit or canopy.