

## 20 Mini Z Cove

Compact and powerful continuous perimeter luminaire with plaster-in Plaster Trim knife edge detail for a perfect finish. Delivers light smoothly down the wall from a concealed position.

- Miniature continuous perimeter light with knife edge detail.
- Flush snap-in Opal Diffuser (standard) for evenly illuminated lens.
- Flush snap-in Satin Diffuser for maximum efficiency and spot free lens.
- Easy plaster-in integration into walls and ceiling.
- Snap-in LED fixture for easy installation and maintenance
- Continuous mounting to any desired length.
- Lengths and angles factory cut to exact field dimensions or field cut.
- Remote driver, low voltage wiring.
- Made in the USA.



**Housing** Precision extruded aluminum for true dimensions and tolerances

Housing provided in any exact length

Snap-in LED fixture

Corners: standard and non-standard

Finishes: RAL 9010 white 15% gloss

**Integration** Fixation into gypsum walls and ceilings

**Distribution** Continuous even illumination using an opal lens for homogeneous lens appearance, or satin diffuser for higher efficiency

**LED** >90 CRI, 3-Step MacAdam, 2700-4000K white  
3W - 10W per foot, 120 Lumens/watt average  
RA 91-94 (2700K - 4000K)  
Conformal coated for protection against humidity standard

**Driver** Remote driver  
Compatible with quality constant voltage drivers

**Connectivity** POE



**Weight** 3lbs per foot

**Operating Temp** Suitable for operation in maximum ambient temperature of 35C (95F)

**Warranty** 5-year Limited (see complete company warranty information)

**Certifications** ETL and ETL-C for dry and damp location, CE

**Voltages** 120-277VAC, 347VAC

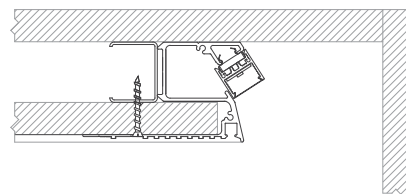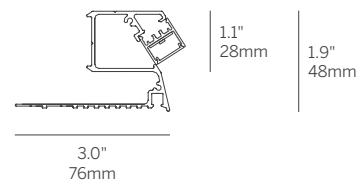

**Gypsum Ceiling Mounting Options**  
2.5" minimum offset, 6" typical offset

## 20 Mini Z Cove

Model	Fixation	Pattern	Length	Power <sup>3</sup>	CRI/CCT	Driver <sup>4</sup>	Lens	Finish
WG-MZC	RPT	S <sup>1</sup> PC <sup>2</sup> PR <sup>2</sup> PZ <sup>2</sup>	A A x B A x B x C A x B x A x B	L M H	927 930 935 940	X S D010 L3DAE L3DOE DFPN	OD (std) SD	W (std) F

### Model

- WG-20MZC = 20 Mini Z Cove

### Fixation

- RPT = Recessed plaster trim

### Pattern

- S = Straight run<sup>1</sup>
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PR = Standard patterns raft 2, 3 or 4 sided with 90° corners<sup>2</sup>
- PZ = Non-standard patterns and/or corners other than 90°; consult factory<sup>2</sup>

### Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25")  
For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

### Power<sup>3</sup>

- L = 3W/ft low power (24V)
- M = 6W/ft mid power (24V)
- H = 10W/ft high power (24V)

### CCT / CRI (Nominal Lumens)

90+ CRI minimum (Low/Mid/High)

- 927 = 2700K, (376/752/1253 lm/ft)
- 930 = 3000K, (376/752/1253 lm/ft)
- 935 = 3500K, (384/767/1278 lm/ft)
- 940 = 4000K, (384/767/1278 lm/ft)

### Driver (remote)<sup>4</sup>

- X = No driver, ordered separately
- S = Standard driver, 120-277V
- D010 = 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC

### Lens

- OD = Satin opal diffuser (standard)
- SD = Satin clear diffuser (high efficiency)

### Finish

- W = White, 15% gloss, RAL9010 (standard)
- F = Custom finish, specify RAL

### Emergency Remote Only

- Emergency LED battery backup available, order separately.

		Power (W/FT)		
		L 3W	M 6W	H 10W
CCT	2700K	376	752	1253
	3000K	376	752	1253
	3500K	384	767	1278
	4000K	384	767	1278

Lumens per foot (nominal)

technical  
information

Whitegoods reserves the right to change any information without prior notice.

### Notes

- 1 Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options.
- 2 See pattern specsheet.
- 3 Wattage shown does not include power supplies/drivers.
- 4 Remote drivers required. See power supply page for details.