


# Mini Edgeless Cove

## WG-MEC-...-SSD-W Delivered Lumens Per Foot

	Power							
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	L [2.7 W/ft]	M [5.5 W/ft] <sup>2</sup>	H [8.0 W/ft]
CCT 927	243	470	884	1358	2001	-	-	-
930	254	490	920	1415	2084	-	-	-
935	263	507	953	1466	2182	-	-	-
940	265	520	978	1505	2241	-	-	-
TW <sup>1</sup>	141	255	457	694	-	-	-	-
WD <sup>1</sup>	-	-	-	-	-	204	424	613
RGBW <sup>2</sup>	-	-	-	-	-	-	346	-




Beam Angle (0-180) = 53.4  
Beam Angle (90-270) = 115.9

	Power Multiplier							
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	L [2.7 W/ft]	M [5.5 W/ft] <sup>2</sup>	H [8.0 W/ft]
9XX	0.12	0.23	0.44	0.67	1.00	-	-	-
TW	0.06	0.12	0.21	0.32	-	-	-	-
WD	-	-	-	-	-	0.09	0.19	0.28
RGBW	-	-	-	-	-	-	0.16	-

- 1 TW lumen data at maximum output (4000K). WD lumen data at maximum output (3000K).
- 2 RGBW lumen data at maximum output with 3000K White LED. M-**RGBW** power level wattage is 7.6W/ft.
- 3 Polar Plot and Isofootcandle diagram are applicable to part number noted; use Multiplier table(s) to approximate other Power / CCT options.

CCT Multiplier			
927	930	935	940
0.92	0.95	1.00	1.03

## WG-MEC-RPT-S-...-P2-935-...-SSD-W 10'-0" ceiling height

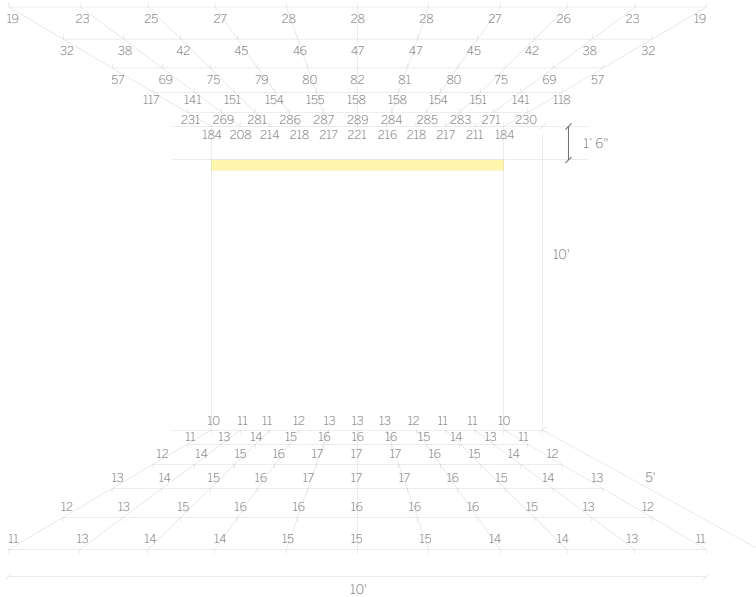

Surface reflectances:

- 80% Ceiling
- 50% Wall
- 20% Floor

Illuminance points are spaced 1'-0" on center.  
Illuminance values are shown in units of foot-candles.

## WG-MEC-RPT-S-...-P4-935-...-SSD-W 20'-0" ceiling height

