
Quantum



Passive heat dissipation: **die-cast aluminum** heat sink

Light management: aluminum casing coated with **embossed** or **golden** effect


Organic aesthetics: deep "trumpet-shaped" optical compartment with soft lines



Elongated optical compartment that reduces glare with embossed or *"warm & chic"* **golden** finish

Quantum Downlight - LED PowerLED 2 W 630 mA

C.C. IP44




type		color	lumens		optic	
White	**E-95840**	4000K	174 lm	CRI 80 **N**	8°	**08**
Black	**E-95841**	3000K	162 lm	CRI 80 **W**	15°	**15**
Grey	**E-95842**	2700K	155 lm	CRI 80 **M**	30°	**30**
Gold	**E-96433**				45°	**45**

power supply options (remote only)

S	**D010**
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V

Quantum Downlight - LED PowerLEDs 6 W 500 mA

C.C. IP44




type		color	lumens		optic	
White	**E-95843**	4000K	650 lm	CRI 80 **N**	15°	**15**
Black	**E-95844**	3000K	588 lm	CRI 80 **W**	30°	**30**
Grey	**E-95845**	2700K	557 lm	CRI 80 **M**	45°	**45**
Gold	**E-96434**					

power supply options (remote only)

S	**D010**
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V

Quantum Downlight - LED Array 15 W 400 mA

C.C. IP44




type		color	lumens		optic	
White	**E-95849**	4000K	1670 lm	CRI 83 **N**	15°	**15**
Black	**E-95850**	3000K	1560 lm	CRI 83 **W**	30°	**30**
Grey	**E-95851**	2700K	1446 lm	CRI 83 **M**	45°	**45**
Gold	**E-96435**					
White	**E-95852**	3000K	1160 lm	CRI 95 **W**	15°	**15**
Black	**E-95853**	2700K	1070 lm	CRI 95 **M**	30°	**30**
Grey	**E-95854**				45°	**45**
Gold	**E-96436**					

power supply options (remote only)

S	**D010**
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V

Quantum Downlight - LED Array 25 W 720 mA

C.C. **IP44**

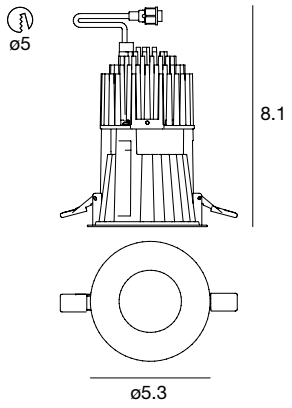

type		color	lumens			optic	
White	**E-96363**	4000K	2882 lm	CRI 83	**N**	15°	**15**
Black	**E-96364**	3000K	2680 lm	CRI 83	**W**	30°	**30**
Grey	**E-96365**	2700K	2505 lm	CRI 83	**M**	45°	**45**
Gold	**E-96366**						
White	**E-96359**	4000K	2180 lm	CRI 95	**N**	15°	**15**
Black	**E-96360**	3000K	1893 lm	CRI 95	**W**	30°	**30**
Grey	**E-96361**	2700K	1760 lm	CRI 95	**M**	45°	**45**
Gold	**E-96362**						

power supply options (remote only)

S	**D010**
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V


HAPPY SUN
HAPPY FIT
CONCEPT 2