











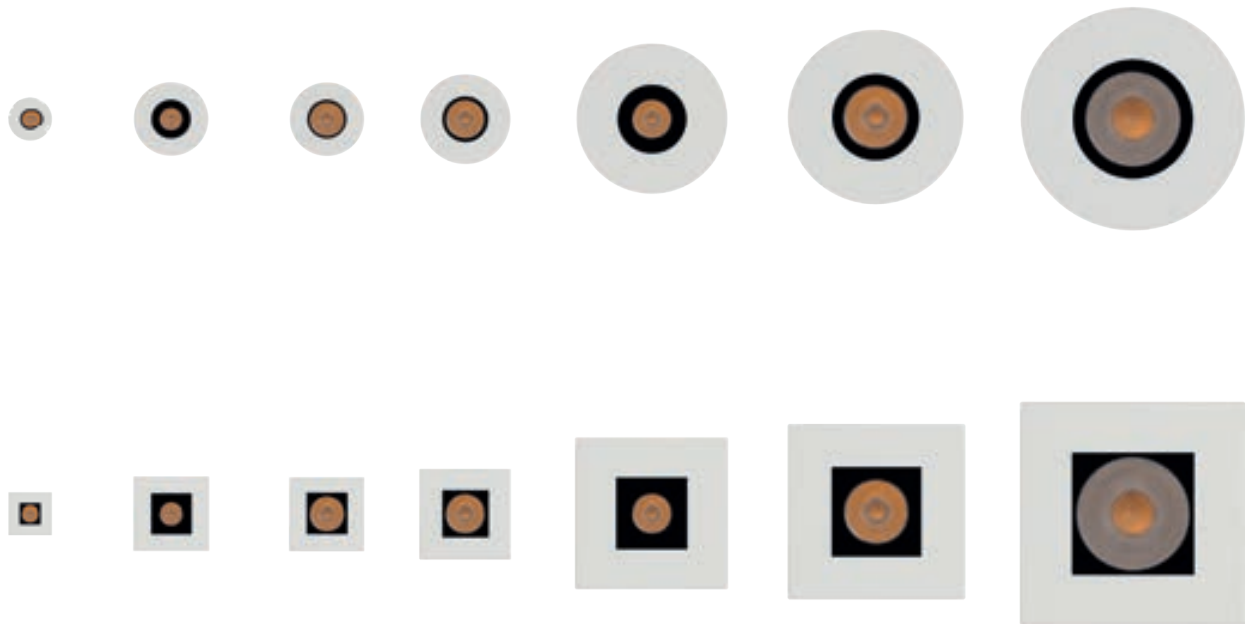








# vos range




	1.5 W	2 W	4 W	6 W	8 W	15 W	25 W
<b>_R</b> 	Ø 0.8 in	Ø 1.4 in	Ø 1.4 in	Ø 1.7 in	Ø 2.8 in	Ø 4.1 in	Ø 5.3 in
<b>_RJ</b> 	-	-	Ø 2.4 in	-	Ø 3 in	Ø 3.9 in	-
<b>_Q</b> 	□ 0.8 in	□ 1.4 in	□ 1.4 in	□ 1.7 in	□ 2.8 in	□ 4.1 in	□ 5.3 in
<b>_QJ</b> 	-	-	□ 2.4 in	-	□ 3 in	□ 3.9 in	-
<b>Accessories</b>	-						
<b>Finish</b>							
<b>Balance CRI 92</b>	2700K 3000K 3500K	2700K 3000K 3500K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
<b>Efficiency CRI 80</b>	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
<b>Optics</b>	Medium Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood
<b>Driver</b>	On/Off 0-10V	On/Off 0-10V	On/Off 0-10V	On/Off 0-10V	On/Off 0-10V	On/Off 0-10V	On/Off 0-10V
	0.6 in	1.1 in	1.1 in 2.1 in (J)	1.4 in	2.5 in 2.8 in (J)	3.7 in	4.8 in

### F.O.L.™

The optics group consists of a polycarbonate lens combined with F.O.L.™ (Filtering Optical Layers) filters: a 5-filter patented system made of polyethylene terephthalate with different levels of opacity to safeguard the clarity of the light beam and it guarantees optimal optical efficiency.


### HC Visual comfort

The honeycomb-like filter integrated in the Honeycomb versions allows to shield the source further. The hexagonal microcells forming the grid contribute towards shielding the secondary light beam, thus almost eliminating glare altogether.

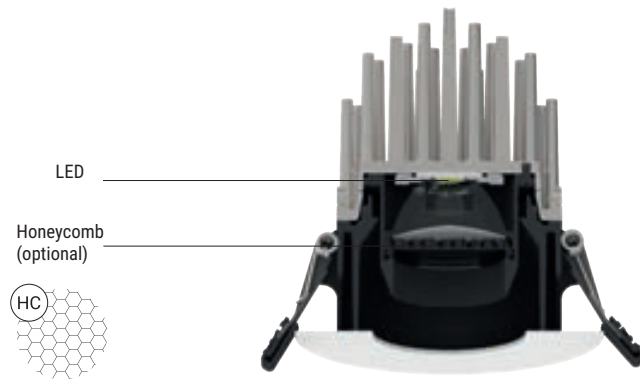

### Pinhole

The optics compartment applies the pin-hole camera concept, thus guaranteeing reflectance control. The source is positioned on a receded plane with respect to the opening of the compartment: the photons forming the primary light beam project without being hindered; on the contrary, the outermost photons bounce in the compartment, painted black to obtain maximum degree of absorption, progressively dimming up to complete elimination.

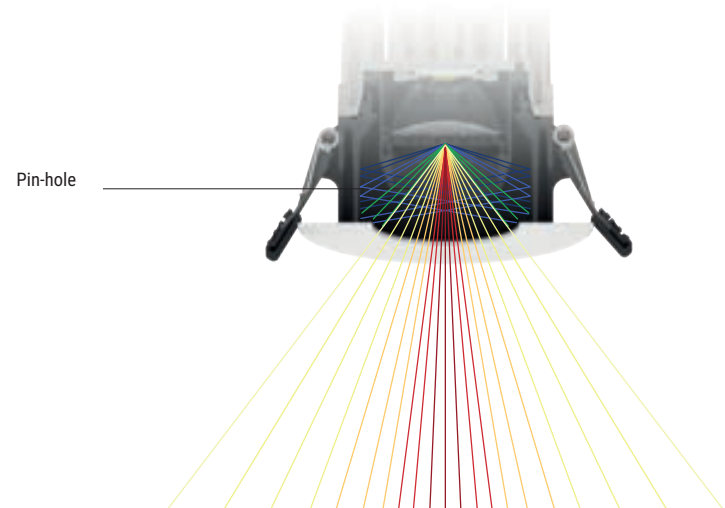

### Adjustable version

The Vos\_RJ and Vos\_QJ range of products come with a 360° rotation on the horizontal axis and a 35° tilt on the vertical axis.

### Shielding of the optics compartment



The downlight structure was designed to avoid rear light dispersion and for shielding the plenum space.

### Accessory

The luminaire can be directed using a special accessory key, provided at purchase, hence avoiding touching the optics with the fingers directly.



Vos\_QJ | Downlight | powerLED | Damp location | Driver remote | Adjustable | 4W 350mA



HC

Balance - CRI 92

White	<b>E81270</b>	2700 K	395 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E81271</b>	3000 K	423 lm	<b>W</b>	Medium Flood	<b>30</b>
		3500 K	423 lm	<b>T</b>	Flood	<b>60</b>
		4000 K	456 lm	<b>N</b>		

White **E80478**

Black **E80479**

Efficiency - CRI

White	<b>E81272</b>	2700 K	490 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E81273</b>	3000 K	490 lm	<b>W</b>	Medium Flood	<b>30</b>
		3500 K	490 lm	<b>T</b>	Flood	<b>60</b>
		4000 K	529 lm	<b>N</b>		

White **E80476**

Black **E80477**

HC

power supply options (remote only)

**ECO30W-350**

0-10V EldoLED ECOdrive  
30W for 1-3 fixtu es



**SOLO50W-350**

0-10V EldoLED SOLOdrive  
50W for 1-6 fixtu es

**SOLO100W-350**

0-10V EldoLED SOLOdrive  
100W for 1-12 fixtu es

Vos\_QJ | Downlight | powerLED | Damp location | Driver remote | Adjustable | 8W 700mA



HC

Balance - CRI 92

White	<b>E81278</b>	2700 K	689 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E81279</b>	3000 K	738 lm	<b>W</b>	Medium Flood	<b>30</b>
		3500 K	738 lm	<b>T</b>	Flood	<b>45</b>
		4000 K	796 lm	<b>N</b>		

White **E80490**

Black **E80491**

Efficiency - CRI

White	<b>E81280</b>	2700 K	854 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E81281</b>	3000 K	854 lm	<b>W</b>	Medium Flood	<b>30</b>
		3500 K	854 lm	<b>T</b>	Flood	<b>45</b>
		4000 K	922 lm	<b>N</b>		

White **E80488**

Black **E80489**

HC

power supply options (remote only)

**ECO30W-700**

0-10V EldoLED ECOdrive  
30W for 1-3 fixtu es


**SOLO50W-700**

0-10V EldoLED SOLOdrive  
50W for 1-4 fixtu es

**SOLO100W-700**

0-10V EldoLED SOLOdrive  
100W for 1-8 fixtu es

Vos\_QJ | Downlight | arrayLED | Damp location | Driver remote | Adjustable | 15W 400mA



Balance - CRI 92

White	<b>E81286</b>	2700 K	1568 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E81287</b>	3000 K	1677 lm	<b>W</b>	Medium Flood	<b>30</b>
		3500 K	1677 lm	<b>T</b>	Flood	<b>60</b>
		4000 K	1804 lm	<b>N</b>		

Efficiency - CRI

White	<b>E81288</b>	2700 K	1932 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E81289</b>	3000 K	1932 lm	<b>W</b>	Medium Flood	<b>30</b>
		3500 K	1932 lm	<b>T</b>	Flood	<b>60</b>
		4000 K	2078 lm	<b>N</b>		

power supply options (remote only)

<b>ECO30W-400</b>	<b>SOLO50W-400</b>	<b>SOLO100W-400</b>
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures