


warp range

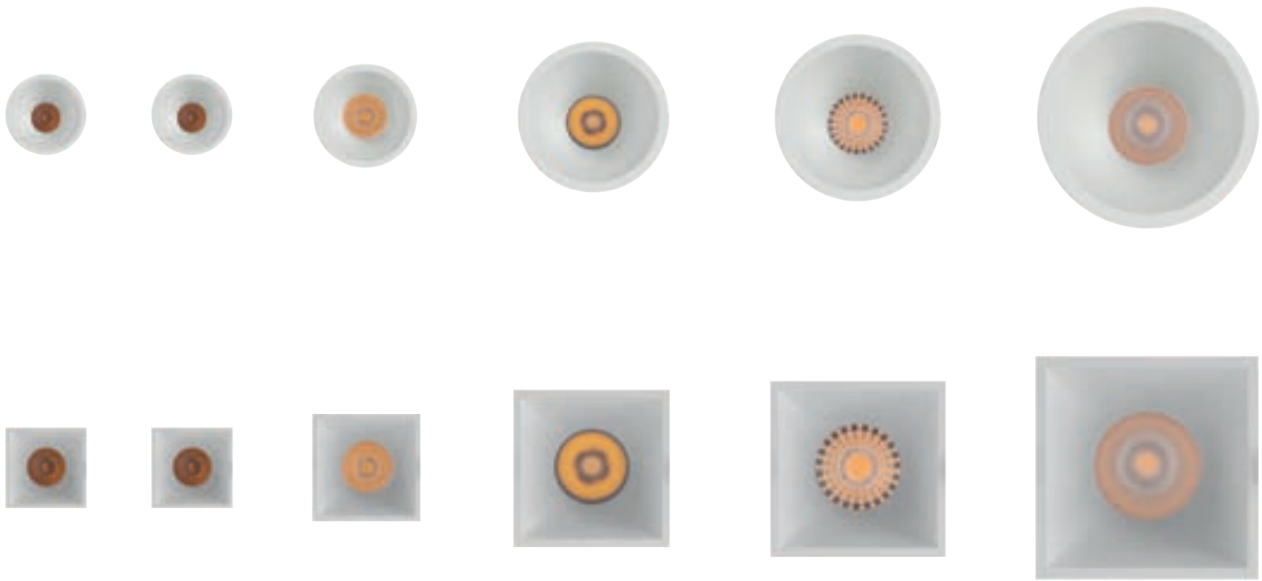


	2 W	4 W	6 W	8 W	10 W	15 W	25 W	45 W
_R 	Ø 1.4 in	Ø 1.4 in	Ø 1.7 in	-	Ø 2.8 in	Ø 3.9 in	Ø 5.3 in	Ø 5.3 in
_RY 	Ø 2 in	Ø 2 in	-	-	Ø 2.8 in	Ø 3.9 in	Ø 5.3 in	-
_RJ 	-	-	-	Ø 3.2 in	-	Ø 4.7 in	-	-
_Q 	□ 1.4 in	□ 1.4 in	□ 1.7 in	-	□ 2.8 in	□ 3.9 in	□ 5.3 in	-
_QY 	□ 2 in	□ 2 in	-	-	□ 2.8 in	□ 3.9 in	□ 5.3 in	-
Accessories				-		-		
Finish								
Balance CRI 92	2700K 3000K 3500K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
Efficiency CRI 80	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
Optics	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood
Driver	On/Off 0-10V	On/Off 0-10V	On/Off 0-10V	On/Off 0-10V	On/Off 0-10V	On/Off 0-10V	On/Off 0-10V	On/Off 0-10V
	1.1 in (_R / _Q) 1.8 in (_RY / _QY)	1.1 in (_R / _Q) 1.8 in (_RY / _QY)	1.4 in (_R) 1.4 in (_Q)	2.7 in (_RJ)	2.5 in (_R / _RY) 2.5 in (_Q / _QY)	3.6 in (_R / _RY) 4.1 in (_RJ) 3.6 in (_Q / _QY)	5 in (_R / _RY) 5 in (_Q / _QY)	5 in

F.O.L.™

The optics group consists of a polycarbonate lens combined with F.O.L.™ (Filtering Optical Layers) filters: a 5-filter patented system made of polyethylene terephthalate with different levels of opacity to safeguard the clarity of the light beam and it guarantees optimal optical efficiency.

HC Visual comfort

The honeycomb-like filter integrated in the Honeycomb versions allows to shield the source further. The hexagonal microcells forming the grid contribute towards shielding the secondary light beam, thus almost eliminating glare altogether.

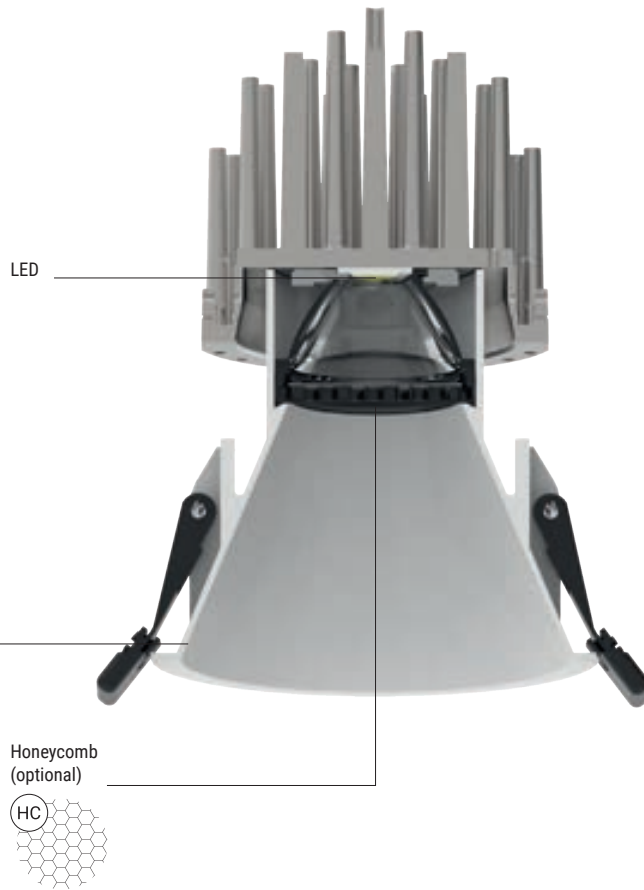

Minimale frame




Asymmetric version



The Warp_RY and Warp_QY range of products are slanted by 25° and offer an asymmetric emission, ideal for the uniform distribution of light on lateral surfaces. The slanted configuration of the lamp body allows to conceal the light source, thus eliminating direct glare.

A Adjustable version

The Warp_RJ range of products come with a 360° rotation on the horizontal axis and a 25° tilt on the vertical axis.

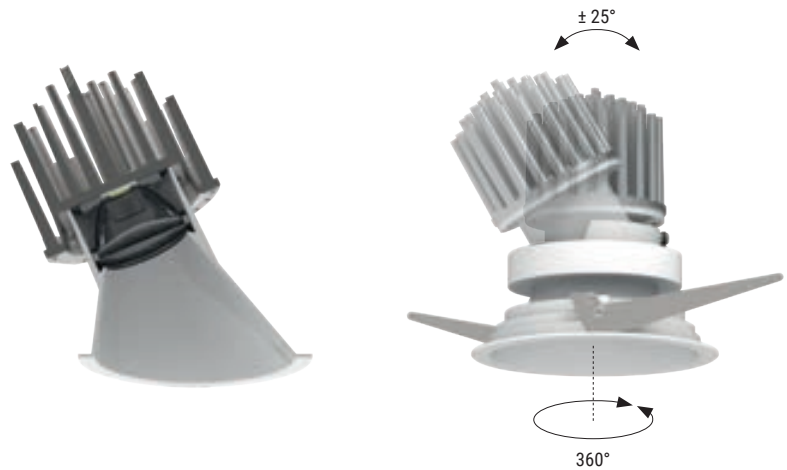

Warp_R | Downlight | powerLED | Damp Location | Driver remote | 2W 630mA



Balance - CRI 92

White	E90542	2700 K	157 lm	M	Spot	15
Black	E90543	3500 K	179 lm	T	Medium Flood	30
		3000 K	179 lm	W	Flood	60



White	E90722
Black	E90723

Efficiency - CRI 80

White	E90544	2700 K	219 lm	M	Spot	15
Black	E90545	3000 K	233 lm	W	Medium Flood	30
		3500 K	233 lm	T	Flood	60





White	E90720
Black	E90721

Power supply options (remote only)

ECO30W-630 0-10V EldoLED ECOdrive 30W for 1-10 fixtures	SOLO50W-630 0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	SOLO100W-630 0-10V EldoLED SOLOdrive 100W for 1-32 fixtures
--	--	--

Warp_R | Downlight | powerLED | Damp Location | Driver remote | 4W 350mA



Balance - CRI 92

White	E90740	2700 K	395 lm	M	Spot	15
Black	E90741	3000 K	423 lm	W	Medium Flood	30
		3500 K	423 lm	T	Flood	60



White	E90744
Black	E90745

Efficiency - CRI 80

White	E90546	2700 K	490 lm	M	Spot	15
Black	E90547	3000 K	490 lm	W	Medium Flood	30
		3500 K	490 lm	T	Flood	60




White	E90742
Black	E90743

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
---	---	--

Warp_R | Downlight | powerLED | Damp Location | Driver remote | 6W 500mA



HC

Balance - CRI 92

White	E90748	2700 K	532 lm	M	Spot	15
Black	E90749	3000 K	569 lm	W	Medium Flood	30
		3500 K	569 lm	T	Flood	60
White	E90752	4000 K	614 lm	N		
Black	E90753					

Efficiency - CRI 80


White	E90548	2700 K	659 lm	M	Spot	15
Black	E90549	3000 K	659 lm	W	Medium Flood	30
		3500 K	659 lm	T	Flood	60
White	E90750	4000 K	711 lm	N		
Black	E90751					

Power supply options (remote only)

ECO30W-500	SOLO50W-500	SOLO100W-500
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures



Warp_R | Downlight | powerLED | Damp Location | Driver remote | 10W 800mA



HC

Balance - CRI 92

White	E90762	2700 K	960 lm	M	Spot	15
Black	E90763	3000 K	1034 lm	W	Medium Flood	30
		3500 K	1034 lm	T	Flood	60
White	E90766	4000 K	1108 lm	N		
Black	E90767					

Efficiency - CRI 80



White	E90550	2700 K	1108 lm	M	Spot	15
Black	E90551	3000 K	1194 lm	W	Medium Flood	30
		3500 K	1194 lm	T	Flood	60
White	E90764	4000 K	1280 lm	N		
Black	E90765					

Power supply options (remote only)

ECO30W-800	SOLO100W-800
0-10V EldoLED ECOdrive 30W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures



Warp_R | Downlight | arrayLED | Damp Location | Driver remote | 15W 400mA



Balance - CRI 92

White	E90776	2700 K	1568 lm	M	Spot	15
Black	E90777	3000 K	1677 lm	W	Medium Flood	30
		3500 K	1677 lm	T	Flood	60
White	E90780	4000 K	1804 lm	N		
Black	E90781					


Efficiency - CRI 80

White	E90552	2700 K	1932 lm	M	Spot	15
Black	E90553	3000 K	1932 lm	W	Medium Flood	30
		3500 K	1932 lm	T	Flood	60
White	E90778	4000 K	2078 lm	N		
Black	E90779					

Power supply options (remote only)

ECO30W-400	SOLO50W-400	SOLO100W-400
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

Warp_R | Downlight | arrayLED | Damp Location | Driver remote | 25W 700mA



Balance - CRI 92

White	E90790	2700 K	2598 lm	M	Spot	15
Black	E90791	3000 K	2794 lm	W	Medium Flood	30
		3500 K	2794 lm	T	Flood	60
White	E90794	4000 K	2990 lm	N		
Black	E90795					


Efficiency - CRI 80

White	E90612	2700 K	3210 lm	M	Spot	15
Black	E90613	3000 K	3431 lm	W	Medium Flood	30
		3500 K	3431 lm	T	Flood	60
White	E90792	4000 K	3431 lm	N		
Black	E90793					

Power supply options (remote only)

SOLO50W-700	SOLO100W-700
0-10V EldoLED SOLOdrive 50W for 1 fixture	0-10V EldoLED SOLOdrive 100W for 1-3 fixtures

Warp_R | Downlight | arrayLED | Damp Location | Driver remote | 45W 1250mA




Balance - CRI 92

White	E81487	2700 K	5033 lm	M	Spot	15
Black	E81488	3000 K	5383 lm	W	Medium Flood	30
		3500 K	5383 lm	T	Flood	60
White	E81491	4000 K	5784 lm	N		
Black	E81492					

Efficiency - CRI 80

White	E81485	2700 K	6185 lm	M	Spot	15
Black	E81486	3000 K	6185 lm	W	Medium Flood	30
		3500 K	6185 lm	T	Flood	60
White	E81489	4000 K	6649 lm	N		
Black	E81490					



Power supply options (remote only)

SOLO100W-1250

0-10V EldoLED SOLOdrive
100W for 1 fixture