








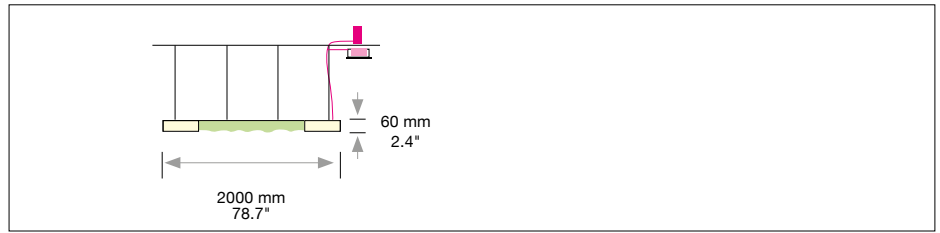

# LUCE VERDE ANELLO

Housing:  
Design:


Aluminum-profile with translucent film. Inner surface made of dried moss.  
SATTLER


	Size: Ø x H mm	Ø x H inches	LED Watt	Lumen¹	Weight kg / lbs²	Item No.	LED direct	Dimming	LED indirect	Finish	Power supply cable	Mounting version	
Sizes	Ø 2000 x 60	78.7 x 2.4	300	25,150	59 / 130.1	291.	x x.	x x.	x x.	x x.	x x x.	x	
DIRECT LED 24V  CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard: Neutral-white		4000 K		x x x.	40.	x x.	x x.	x x.	x x x.	x	
		Optional:	Warm-white	3000 K		x x x.	30.	x x.	x x.	x x.	x x x.	x	
			Extra warm-white	2700 K		x x x.	27.	x x.	x x.	x x.	x x x.	x	
Dimming		Standard: 0 - 10 V				x x x.	x x.	51.	x x.	x x.	x x x.	x	
		Optional:	Lutron EcoSystem**		x x x.	x x.	91.	x x.	x x.	x x x.	x		
			DMX		x x x.	x x.	31.	x x.	x x.	x x x.	x		
						**Lutron EcoSystem driver must be ordered separately and remote mounted with mounting version A.							
INDIRECT LED 24V  CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours		Standard: No indirect LED'S				x x x.	x x.	x x.	00.	x x.	x x x.	x	
		Optional:	Neutral-white	4000 K		x x x.	x x.	x x.	40.	x x.	x x x.	x	
			Warm-white	3000 K		x x x.	x x.	x x.	30.	x x.	x x x.	x	
			Extra warm-white	2700 K		x x x.	x x.	x x.	27.	x x.	x x x.	x	
			RGB color control*				x x x.	x x.	x x.	60.	x x.	x x x.	x
Indirect light is significantly weaker than direct light output						*Only available with DMX. Combinations up to two rows of LED possible.							
Finish		Standard: 12		white, powder coated, similar RAL 9003		x x x.	x x.	x x.	x x.		x x x.	x	
		(Powder coated)		30 anthracite fine textured									
Power supply cable		Standard: Z 70		Silver		x x x.	x x.	x x.	x x.		x x x.	x	
		Optional:	Z 71		white								
			Z 73		black								
													


# LUCE VERDE ANELLO

Housing:  
Design:


Aluminum-profile with translucent film. Inner surface made of dried moss.  
SATTLER

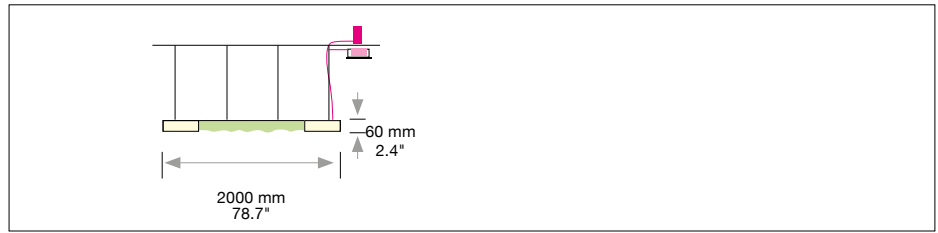

## Mounting Version



4-point suspension with external power supply unit in suspended ceiling.



4-point suspension with external power supply unit in separate canopy.

A, B = Distance of external power supply unit to light fixture max. 10m / 394"

Min. suspension height 90 mm

Including steel cable suspension 5000 mm / 197"  
and power supply cable 5000 mm / 197"

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

---	---	---	---	---	---	-
-----	-----	-----	-----	-----	-----	---

Complete order number

Power supply unit: (1 LED Stripe)			
Type / Size mm / inch L x W x H	Included with mounting version	Protective rating	
<b>DE 3F</b> 360 / 400 / 85 mm / 14.2 x 15.7 x 3.3"	<b>A</b>	<b>IP 20</b>	

Canopy: (1 LED Stripe)			
Type/ Size mm / inch Ø cover plate / body / H	Included with mounting version	Protective rating	
<b>DB 500</b> Ø 510 / 470 mm / 20,0 x 18.5"	<b>B</b>	<b>IP 20</b>	

Color: 12 white, similar RAL 9003, contact factory for other finishes  
Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is 120-277 VAC 47-63 Hz

For effective illumination of dried moss we recommend the use of separate spotlights.

Since the moss is a natural product, discoloration and fading can occur. This is especially possible with increased UV radiation. Therefore, discoloration and fading are excluded as reasons for complaint.




by SATTLER

### To preserve the appearance of the moss, please follow subsequent care instructions:

do not pour or spray water on moss • a gentle stream of air can be used for cleaning • use lamps without UV rays for additional lighting • avoid humidity of more than 70% • protect the moss from extreme heat or frost.

## Optional



### Ceiling fixation included with mounting versions A

Consisting of a cavity ceiling box with 80 mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

200. 00. 00. 00. 12 (white)

