







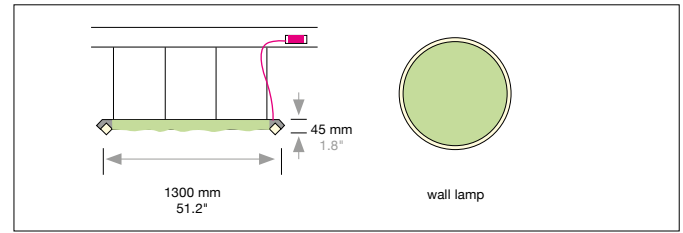

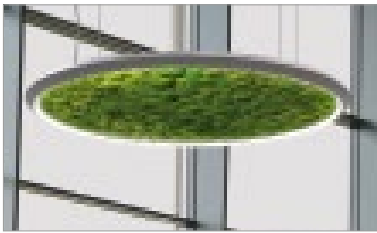


LUCE VERDE SLIM



Housing: Aluminum-profile with integrated acrylic glass. Inner surface made of dried moss.
Design: SATTLER




	Size: L x W x H mm	Inches	LED Watt	Lumen¹	Weight kg / lbs²	Item No.	LED Row 1	Dimming	LED Row 2	Finish	Power supply cable	Mounting version	
Sizes	Luce Verde SLIM												
	Ø 1300 x 45	51.2 x 1.8"	70	4112	24 / 52.9	790.	x x.	x x.	x x.	x x.	x x x.	x	
	Luce Verde SLIM WALL												
	Ø 1300 x 45	51.2 x 1.8"	70	4112	24 / 52.9	791.	x x.	x x.	x x.	x x.	x x x.	x	
LED 24V		Standard: Neutral-white		4000 K		x x x.	40.	x x.	x x.	x x.	x x x.	x	
		Optional:	Warm-white Extra warm-white	3000 K 2700 K		x x x. x x x.	30. 27.	x x. x x.	x x. x x.	x x. x x.	x x x. x x x.	x x	
CRI > 90 Mac Adam 3 SELV L80 B10 100,000 hours													
Dimming		Standard: 0 - 10 V				x x x.	x x.	51.	x x.	x x.	x x x.	x	
		Optional:	Lutron EcoSystem**			x x x.	x x.	91.	x x.	x x.	x x x.	x	
**Lutron EcoSystem driver only available with mounting version B above the ceiling/or remote mounted, and must be ordered separately.													
Finish		Standard:	12 white, powder coated, similar RAL 9003	Optional (Powder coated):	 30 anthracite fine textured	x x x.	x x.	x x.	x x.		x x x.	x	
Power supply cable		Standard:	Z 70 Silver	Optional:	 Z 71 white	 Z 73 black	x x x.	x x.	x x.	x x.	x x.		x

LUCE VERDE SLIM



Housing: Aluminum-profile with integrated acrylic glass. Inner surface made of dried moss.
 Design: SATTLER

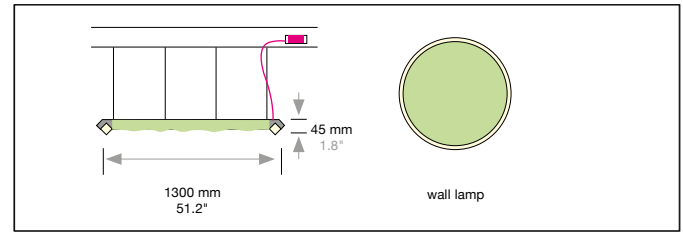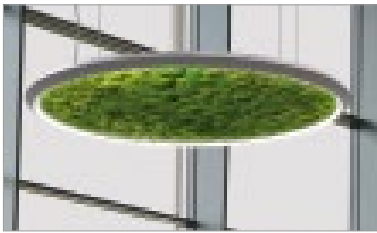

Mounting Version



4-point suspension with canopy or canopy in suspended ceiling.



Wall lamp incl. 2 wall hooks for fixing and external power supply unit in false wall.



Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	—

B, W = Distance of external power supply unit to light fixture max. 10m / 394"

Min. suspension height 90 mm / 3.5"

Including steel cable suspension 5000 mm / 197"
 and power supply cable 5000 mm / 197"

—	—	—	—	—	—
---	---	---	---	---	---

Complete order number

	Power supply unit: (1 LED Stripe)		
	Type / Size mm / inch L x W x H	Included with Mounting version	Protective rating
	DE 1F 360 / 150 / 85 mm / 14.2 x 5.9 x 3.3"	W	IP 20

Input voltage for all external power supply units and canopy is **120-277 VAC 47-63 Hz**

	Canopy: (1 LED Stripe)		
	Type/ Size mm / inch Ø cover plate / body / H	Included with Mounting version	Protective rating
	DBS 250 Ø 250 / 50 mm / 9.8 / 1.9"	B	IP 20

Color: **12 white, similar RAL 9003**, contact factory for other finishes
 Canopy mounts to 4" octagonal junction box.

For effective illumination of dried moss we recommend the use of separate spotlights.

Since the moss is a natural product, discoloration and fading can occur. This is especially possible with increased UV radiation. Therefore, discoloration and fading are excluded as reasons for complaint.




by SATTLER

To preserve the appearance of the moss, please follow subsequent care instructions:

do not pour or spray water on moss • a gentle stream of air can be used for cleaning • use lamps without UV rays for additional lighting • avoid humidity of more than 70% • protect the moss from extreme heat or frost.

Optional



Ceiling fixation included with mounting versions B

Consisting of a cavity ceiling box with 80 mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version B.

200. 00. 00. 00. 12 (white)

