
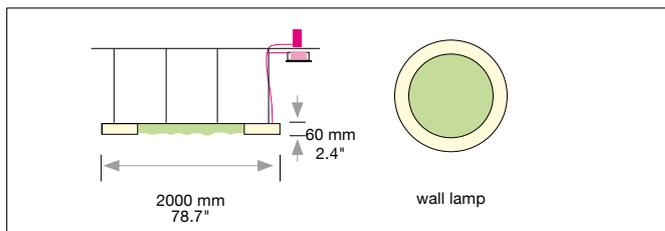


## LUCE VERDE ANELLO

Circular aluminum-profile with translucent film. Inner surface made of dried moss. Pendant light full-scale lighting, wall lamp from the outside inwards slightly decreasing illumination.

Design: SATTLER




Size: Ø x H mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version	
<b>Sizes</b>												
<b>Luce Verde ANELLO</b>												
<b>Ø 2000 x 60</b>	<b>78.7 x 2.4</b>	352	22,773	59 / 130.1	<b>291.</b>	x x .	x x .	x x .	x x .	x x x .	x	
<b>Luce Verde ANELLO WALL</b>												
<b>Ø 2000 x 60</b>	<b>78.7 x 2.4</b>	89	6,658	59 / 130.1	<b>287.</b>	x x .	x x .	x x .	x x .	x x x .	x	
 <p>The LUCE VERDE series provides a glimpse of nature and an atmosphere of well-being due to its structural surface, the luscious green and the natural feel of the moss integrated in the LED ring luminaires. The moss material by art aqua is durable and doesn't need to be maintained. With their gentle softness and characteristic tactile feel, these large-dimensioned luminaires speak to all our senses and simultaneously improve the room acoustics.</p>												
<b>DIRECT LED</b> 24V		<b>Neutral-white</b> <b>Cold-white</b> <b>Warm-white</b> <b>Extra warm-white</b> <b>Extra warm-white</b>	<b>4000 K</b> <b>5000 K</b> <b>3000 K</b> <b>2700 K</b> <b>2200 K*</b>	<b>(Standard)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b>	x x x . x x x . x x x . x x x . x x x .	<b>40.</b> <b>50.</b> <b>30.</b> <b>27.</b> <b>22.</b>	x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x .	x x x . x x x . x x x . x x x . x x x .	x x x x x	
CRI > 90 *CRI > 80												
<b>INDIRECT LED</b> 24V		<b>No indirect LED'S</b> <b>Neutral-white</b> <b>Cold-white</b> <b>Warm-white</b> <b>Extra warm-white</b> <b>Extra warm-white</b> <b>RGB color control*</b>	<b>4000 K</b> <b>5000 K</b> <b>3000 K</b> <b>2700 K</b> <b>2200 K*</b>	<b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b>	x x x . x x x .	<b>00.</b> <b>40.</b> <b>50.</b> <b>30.</b> <b>61.</b> <b>22.</b> <b>60.</b>	x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x .	x x . x x . x x . x x . x x . x x . x x .	x x x . x x x .	x x x x x x x	
CRI > 90 *CRI > 80												
Indirect light is significantly weaker than direct light output												
<b>Dimming</b>		<b>Dimmable 0 - 10 V</b> <b>DMX (RGB possible)</b> <b>LUTRON (contact factory)</b>		<b>(Standard)</b> <b>(Optional)</b> <b>(Optional)</b>	x x x . x x x . x x x .	<b>51.</b> <b>31.</b> <b>71.</b>	x x . x x . x x .	<b>00.</b> <b>00.</b> <b>00.</b>	x x . x x . x x .	x x x . x x x . x x x .	x x x	
<b>Finishes</b>	 <b>11</b> white	(Optional)	 <b>30</b> anthracite		 <b>XX</b> Custom finish	x x x .	x x .	x x .	x x .	 <b>. .</b>	x x x .	x
<b>Power Supply Cable</b>	 <b>Z 70</b> Silver	(Optional)	 <b>Z 71</b> white	 <b>Z 72</b> grey	 <b>Z 73</b> black							
			 <b>Z 74</b> orange	 <b>Z 75</b> red	 <b>Z 76</b> green	x x x .	x x .	x x .	x x .	 <b>. . .</b>		x

1) Net lumen output: Losses due to diffusers and reflectors are considered.  
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.  
2) Weight of lights without remote technical unit or canopy.


## LUCE VERDE ANELLO

Circular aluminum-profile with translucent film. Inner surface made of dried moss. Pendant light full-scale lighting, wall lamp from the outside inwards slightly decreasing illumination.


Design: SATTLER

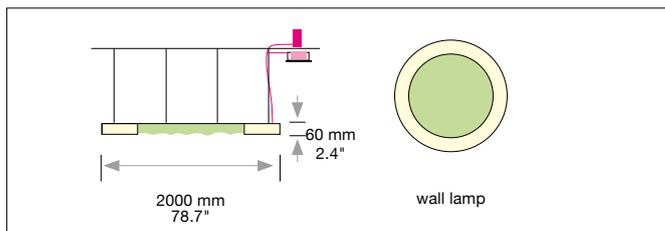


### Mounting Version



4-point suspension with external power supply unit in suspended ceiling



4-point suspension with external power supply unit in separate canopy



Wall lamp with 2 wall brackets (white) 50 mm / 1.97" and external power supply unit in false wall

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, W = Distance of external power supply unit to light fixture max. 10m / 394".

Min. suspension height 90 mm

Including steel cable suspension 5000mm / 197" and power supply cable 5000mm / 197"

X X X.	X X X	X				
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units						
Typ	Size mm / inch			For use with Mounting Version		
	L	W	H			
DE 1F	360	150	85 mm / 14.2 x 5.9 x 3.3"	W		
DE 3F	360	400	85 mm / 14.2 x 15.7 x 3.3"	A		


Dimensions of canopy			
Typ	Size mm / inch		For use with Mounting Version
	Ø cover plate / body		
DB 500	Ø 510 / 470 mm / 20,0 x 18.5"	B	

**Canopy finish: white (11)**  
contact factory for other finishes

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

USA/Canada: Canopy mounts to 4" octagonal junction box.

### Optional



#### Ceiling fixation for mounting version A

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

**200. 00. 00. 00. 11** (white)

# SATTLER

410 381 1497 answers@inter-lux.com  
inter-lux reserves the right to make technical changes without notice

IP 20



Light distribution direct



Conforms to UL-STD 1598  
Certified to CSA-STD C22.2  
No.250.0-08

- 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
- 2) Weight of lights without remote technical unit or canopy.