


# LUCE VERDE SLIM

Circular aluminum-profile with integrated acrylic glass. Inner surface made of dried moss.

Design: SATTLER

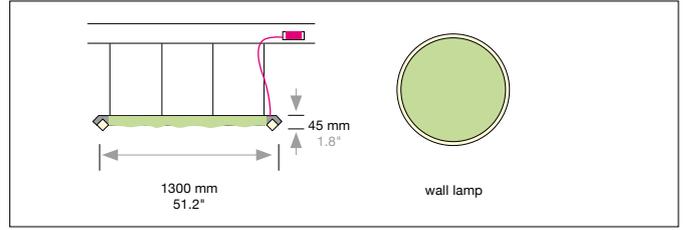


Size: Ø x H mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
<b>Sizes</b>											
<b>Luce Verde SLIM</b>											
Ø 1300 x 45	51.2 x 1.8"	72	3,314	24 / 52.9	<b>790.</b>	x x.	x x.	x x.	x x.	x x x.	x
<b>Luce Verde SLIM WALL</b>											
Ø 1300 x 45	51.2 x 1.8"	72	3,314	24 / 52.9	<b>791.</b>	x x.	x x.	x x.	x x.	x x x.	x
 <p>The LUCE VERDE series provides a glimpse of nature and an atmosphere of well-being due to its structural surface, the luscious green and the natural feel of the moss integrated in the LED ring luminaires. The moss material by art aqua is durable and doesn't need to be maintained. With their gentle softness and characteristic tactile feel, these large-dimensioned luminaires speak to all our senses and simultaneously improve the room acoustics.</p>											
<b>LED</b> 24V CRI > 90 *CRI > 80											
		<b>Neutral-white</b> <b>Cold-white</b> <b>Warm-white</b> <b>Extra warm-white</b> <b>Extra warm-white</b>	<b>4000 K</b> <b>5000 K</b> <b>3000 K</b> <b>2700 K</b> <b>2200 K*</b>	<b>(Standard)</b> (Optional) (Optional) (Optional) (Optional)	x x x. x x x. x x x. x x x. x x x.	<b>40.</b> <b>50.</b> <b>30.</b> <b>27.</b> <b>22.</b>	x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x.	x x x. x x x. x x x. x x x. x x x.	x x x x x
<b>Dimming</b>											
		<b>Dimmable 0 - 10 V</b> <b>DMX</b> <b>LUTRON (contact factory)</b> <b>Dimmable CASAMBI</b> Bluetooth 4.0 remote control through app. Available Starting 3 <sup>rd</sup> quarter 2017	<b>(Standard)</b> (Optional) (Optional) (Optional)	x x x. x x x. x x x. x x x.	x x. x x. x x. x x.	<b>51.</b> <b>31.</b> <b>71.</b> <b>81.</b>	x x. x x. x x. x x.	x x. x x. x x. x x.	x x. x x. x x. x x.	x x x. x x x. x x x. x x x.	x x x x
<b>Finishes</b>											
(Standard)	 <b>11</b> white	(Optional)	 <b>30</b> anthracite	 <b>XX</b> Custom finish	x x x. x x. x x. x x.	x x. x x. x x. x x.	x x. x x. x x. x x.	x x. x x. x x. x x.	. . . . . .	x x x. . . . .	x x
<b>Power Supply Cable</b>											
(Standard)	 <b>Z 70</b> Silver	(Optional)	 <b>Z 71</b> white	 <b>Z 72</b> grey	 <b>Z 73</b> black	x x x. x x. x x. x x.	x x. x x. x x. x x.	x x. x x. x x. x x.	. . . . . .	. . . . . . . .	x x
			 <b>Z 74</b> orange	 <b>Z 75</b> red	 <b>Z 76</b> green						

1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.  
2) Weight of lights without remote technical unit or canopy.




# LUCE VERDE SLIM

Circular aluminum-profile with integrated acrylic glass. Inner surface made of dried moss.

Design: SATTLER

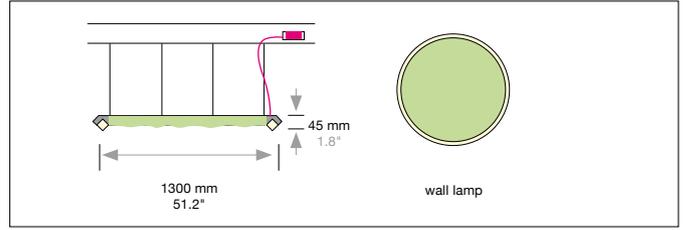

## Mounting Version



4-point suspension with canopy or canopy in suspended ceiling

Wall lamp incl. 2 wall hooks for fixing and external power supply unit in false wall



Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

**B, W** = Distance of external power supply unit to light fixture max. 10m / 394"

**Min.** suspension height 90 mm

**Including steel cable suspension 5000mm / 197"**  
**and power supply cable 5000mm / 197"**

X X X.	X X X	X				
--------	------	------	------	------	-------	---

**Complete order number**

**Dimensions of external power supply units**

Typ	Size mm / inch	For use with
	L W H	Mounting Version
<b>DE 1F</b>	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	<b>W</b>

**Dimensions of canopy**


Typ	Size mm / inch	For use with
	body / H	Mounting Version
<b>DBS 250</b>	Ø 250 / 50 mm / 9.8 / 1.9"	<b>B</b>

**Canopy finish: white (11)**  
contact factory for other finishes

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

USA/Canada: Canopy mounts to 4" octagonal junction box.

## Optional



### Ceiling fixation for mounting version A

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

**200. 00. 00. 00. 11** (white)

