

# guardian



Aquastop®




The ultimate outdoor downlight: powerful, with a choice of four optics, it can operate from considerable heights. It's durable, water and humidity-resistant thanks to Aquastop® cavity technology, and zero maintenance. This makes Guardian the ideal choice for outdoor projects.

## **Materials**

Aluminum body

Anodized aluminum flange

**Guardian | Downlight | powerLED | Wet Location | Driver remote | 7.2W 630mA**

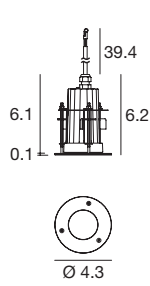

Balance - CRI 80

White	<b>E81893</b>	2700 K	709 lm	<b>M</b>	Spot	<b>15</b>	
Black	<b>E81916</b>	3000 K	760 lm	<b>W</b>	Medium Flood	<b>30</b>	
Grey	<b>E81838</b>	4000 K	821 lm	<b>N</b>	Flood	<b>60</b>	
						Asymmetric	<b>07</b>

Balance - CRI 80



White	<b>E81894</b>	2700 K	709 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E81917</b>	3000 K	760 lm	<b>W</b>	Medium Flood	<b>30</b>
Grey	<b>E81839</b>	4000 K	821 lm	<b>N</b>	Flood	<b>60</b>


**Power supply options (remote only)**

<b>ECO30W-630</b> 0-10V EldoLED ECOdriver 30W for 1-3 fixtures	<b>SOLO50W-630</b> 0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	<b>SOLO100W-630</b> 0-10V EldoLED SOLOdrive 100W for 1-8 fixtures
---	--	--


**Recessed casing**



**E99673**  
Outer casing for brick or concrete-mounted installation



**Guardian\_J | Downlight | powerLED Wet Location | Driver remote | Adjustable | 7.2W 630mA**

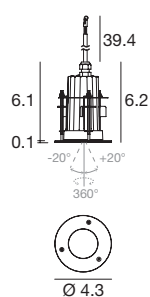

Balance - CRI 80

White	<b>E81895</b>	2700 K	709 lm	<b>M</b>	Spot	<b>20</b>
Black	<b>E81918</b>	3000 K	760 lm	<b>W</b>	Medium Flood	<b>30</b>
Grey	<b>E81840</b>	4000 K	821 lm	<b>N</b>	Flood	<b>60</b>

**Power supply options (remote only)**

<b>ECO30W-630</b> 0-10V EldoLED ECOdriver 30W for 1-3 fixtures	<b>SOLO50W-630</b> 0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	<b>SOLO100W-630</b> 0-10V EldoLED SOLOdrive 100W for 1-8 fixtures
---	--	--





**Recessed casing**




**E99673**  
Outer casing for brick or concrete-mounted installation



**81909W07**

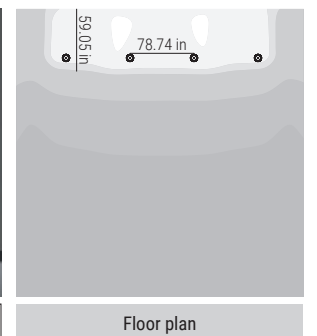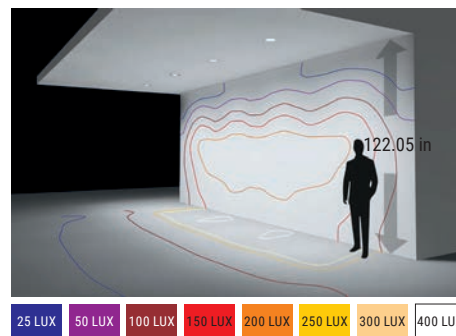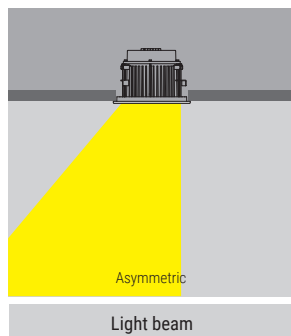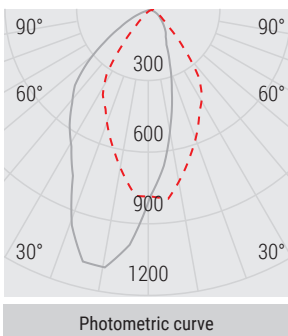


**Guardian | Downlight | powerLED | Wet location | Driver remote | 12.6W 350mA**




Balance - CRI 80

White	<b>E81896</b>	2700 K	1724 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E81919</b>	3000 K	1724 lm	<b>W</b>	Medium Flood	<b>30</b>
Grey	<b>E81841</b>	4000 K	1854 lm	<b>N</b>	Flood	<b>60</b>



Balance - CRI 80

White	<b>E81897</b>	2700 K	1724 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E81920</b>	3000 K	1724 lm	<b>W</b>	Medium Flood	<b>30</b>
Grey	<b>E81842</b>	4000 K	1854 lm	<b>N</b>	Flood	<b>60</b>



Balance - CRI 80

White	<b>E81899</b>	2700 K	1683 lm	<b>M</b>	Asymmetric	<b>07</b>
Black	<b>E81922</b>	3000 K	1808 lm	<b>W</b>		
Grey	<b>E81844</b>	4000 K	1949 lm	<b>N</b>		

**Power supply options (remote only)**


<b>ECO30W-350</b>	<b>SOLO50W-350</b>	<b>SOLO100W-350</b>
0-10V EldoLED ECOdriver 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

Recessed casing




**E99674**  
Outer casing for brick or concrete-mounted installation

**Guardian\_J | Downlight | powerLED | Wet location | Driver remote | Adjustable | 12.6W 350mA**



Balance - CRI 80

White	<b>E81904</b>	2700 K	1724 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E81927</b>	3000 K	1724 lm	<b>W</b>	Medium Flood	<b>35</b>
Grey	<b>E81849</b>	4000 K	1854 lm	<b>N</b>	Flood	<b>45</b>



**Power supply options (remote only)**


<b>ECO30W-350</b>	<b>SOLO50W-350</b>	<b>SOLO100W-350</b>
0-10V EldoLED ECOdriver 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

Recessed casing



**E99674**  
Outer casing for brick or concrete-mounted installation

**Guardian | Downlight | powerLED | Wet Location | Integral Driver | 30W 800mA**

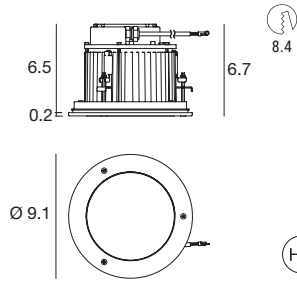

Balance - CRI 80


White	<b>E81906</b>	2700 K	4088 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E81929</b>	3000 K	4372 lm	<b>W</b>	Medium Flood	<b>30</b>
Grey	<b>E81867</b>	4000 K	4702 lm	<b>N</b>	Flood	<b>60</b>

Balance - CRI 80

White	<b>E81907</b>	2700 K	4088 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E81930</b>	3000 K	4372 lm	<b>W</b>	Medium Flood	<b>30</b>
Grey	<b>E81868</b>	4000 K	4702 lm	<b>N</b>	Flood	<b>60</b>

Balance - CRI 80

White	<b>E81909</b>	2700 K	3999 lm	<b>M</b>	Asymmetric	<b>07</b>
Black	<b>E81932</b>	3000 K	4294 lm	<b>W</b>		
Grey	<b>E81870</b>	4000 K	4631 lm	<b>N</b>		




Recessed casing



**E99675**  
Outer casing for brick or concrete-mounted installation

**Guardian\_J | Downlight | powerLED | Wet Location | Integral Driver | Adjustable | 30W 800mA**

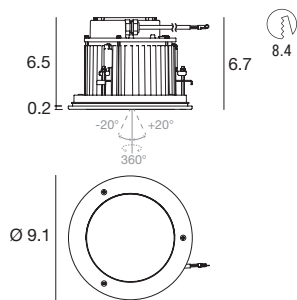


Balance - CRI 80

White	<b>E81914</b>	2700 K	4088 lm	<b>M</b>	Spot	<b>15</b>
Black	<b>E81937</b>	3000 K	4372 lm	<b>W</b>	Medium Flood	<b>35</b>
Grey	<b>E81875</b>	4000 K	4702 lm	<b>N</b>	Flood	<b>45</b>



Recessed casing



**E99675**  
Outer casing for brick or concrete-mounted installation