

Loop66

Remote driver


Light management: versions with **four emissions** and very **narrow light beam**

Passive heat dissipation:
anodized aluminum casing



Loop66 Wall light - Multi emission - PowerLEDs 4 x 6 W 630 mA

ETL wet location listed  C.C. IP66  

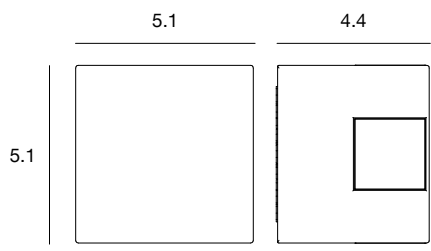

type	color	lumens	optic
White E97065	4000K	4 x 666 lm CRI 80	N 5° 05
Black E97066	3000K	4 x 624 lm CRI 80	W
Grey E97067	2700K	4 x 585 lm CRI 80	M
Cor-Ten E97357			

power supply options (remote only)

S	D010
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V

Outdoor