

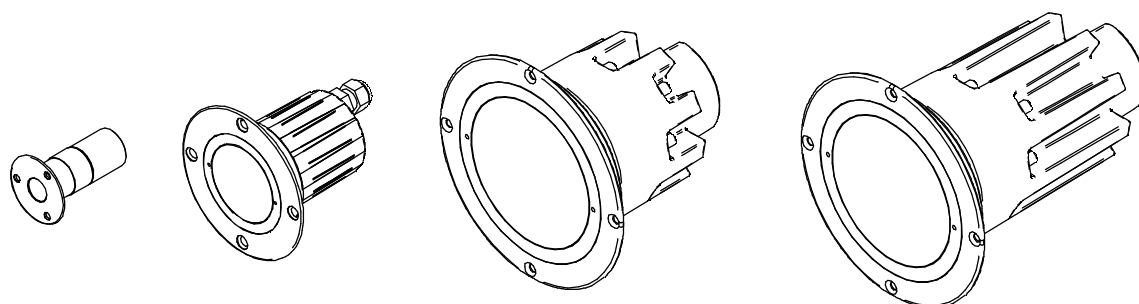



SUELO**Suelo_R / SueloPRO_R****Suelo_RX / SueloPRO_RX**

FIXTURE	OUTER CASING
Suelo_R 1W	E99676
SueloPRO_R 1W	E99677
Suelo-R 2W	E84918
SueloPRO_R 2W	E99684
Suelo_R 4.2W	E84936
Suelo_RJ 4.2W	
SueloPRO_R 4.2W	E84935
Suelo_R 7.2W	E99680
Suelo_R RGBW 8W	
SueloPRO_R 7.2W	
Suelo_RJ 7.2W	E99685
SueloPRO_RX 2W	
Suelo_RX 7.2W	
Suelo_RX RGBW 8W	
SueloPRO_RX 7.2W	E98121
Suelo_RXJ 7.2W	
Suelo_RX 13W	
Suelo_RX RGBW 16W	E84933
Suelo_RXJ 13W	
SueloPRO_RX 13W	E84932
Suelo_RX DOUBLE 12W	
Suelo_RX 30W	E99794
Suelo_RX 30W RGBW	
Suelo_RX DOUBLE 24W	

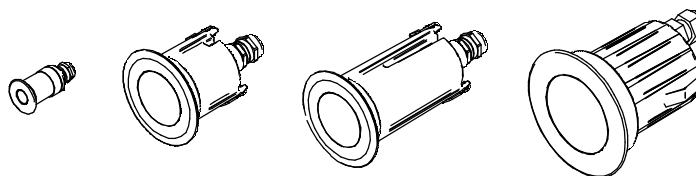

INSTALL PRODUCT IN ACCORDANCE WITH LOCAL AND NATIONAL ELECTRICAL CODES BY A QUALIFIED ELECTRICIAN

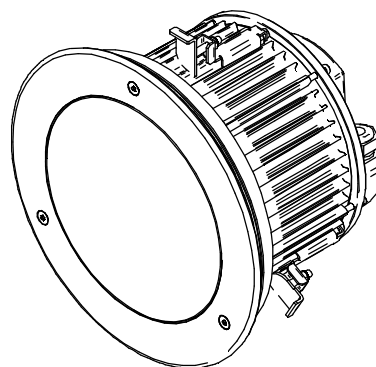

FAILURE TO COMPLY WITH THE INSTALLATION INSTRUCTIONS MAY RESULT IN DEATH OR SEVERE INJURY.



READ ALL SAFETY INSTRUCTIONS INCLUDED WITH LUMINAIRE BEFORE INSTALLING LUMINAIRE. SAVE INSTRUCTIONS FOR FUTURE USE.

CAUTION:

THIS IS AN ELECTRONIC DEVICE. CARE MUST BE TAKEN DURING STORAGE AND HANDLING. STORE IN A CLEAN, COOL AND DRY LOCATION. ELECTROSTATIC DISCHARGE (ESD) CAN HARM THIS PRODUCT. AVOID STATIC DISCHARGE WHILE HANDLING THIS PRODUCT.


CAUTION:

INTER-LUX IS NOT RESPONSIBLE FOR THE STRUCTURAL INTEGRITY OF THE BUILDING TO SUPPORT THE LUMINAIRE. ADDITIONAL BACKING MAY BE REQUIRED.


LOCATE AND REVIEW ANY CONSTRUCTION PLANS AND INTER-LUX RECORD DRAWINGS FOR ALL FIXTURE RUNS. IT IS RECOMMENDED TO LOCARE AND LAY OUT ALL COMPONENTS FOR EACH FIXTURE "RUN". A FIXTURE RUN TYPICALLY CONSISTS OF JOINERS, LENGHTS OF HOUSING, AND ENDCAPS. BE SURE TO IDENTIFY ALL CORRECT LENGHTS FOR EACH FIXTURE RUN.

INSTALLATION INSTRUCTIONS


1

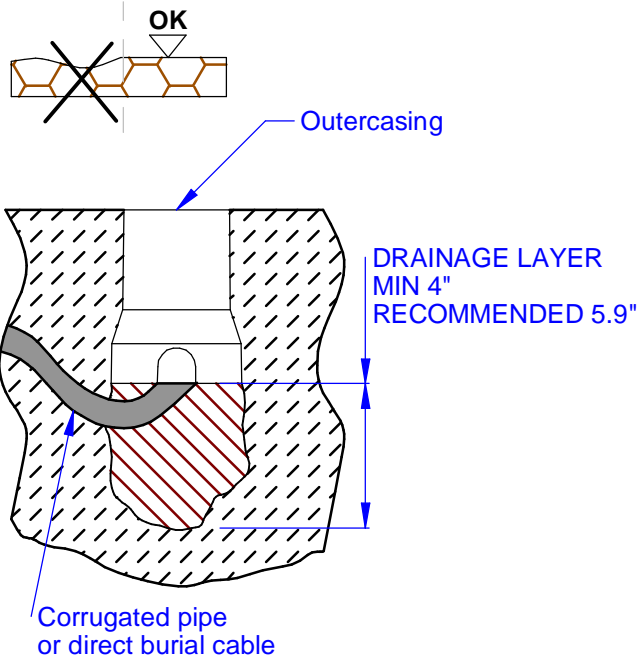

2

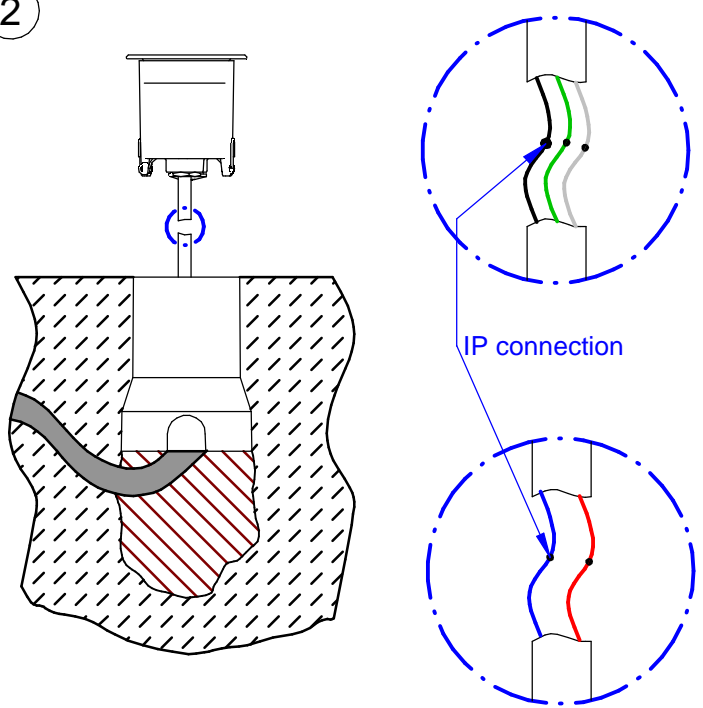


3.A

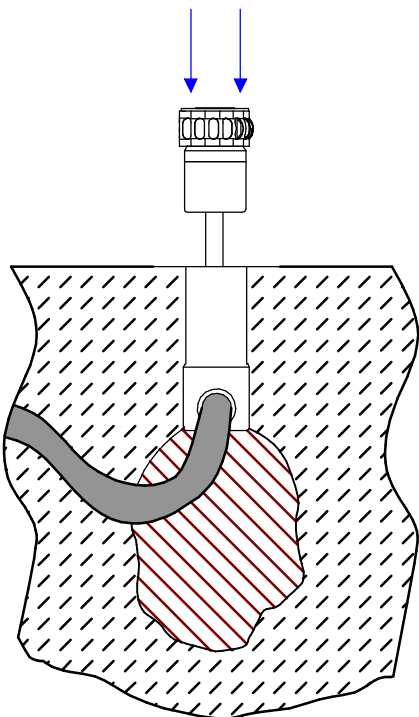


Suelo_R 1W / 2W
SueloPRO_R 1W / 2W

3.B

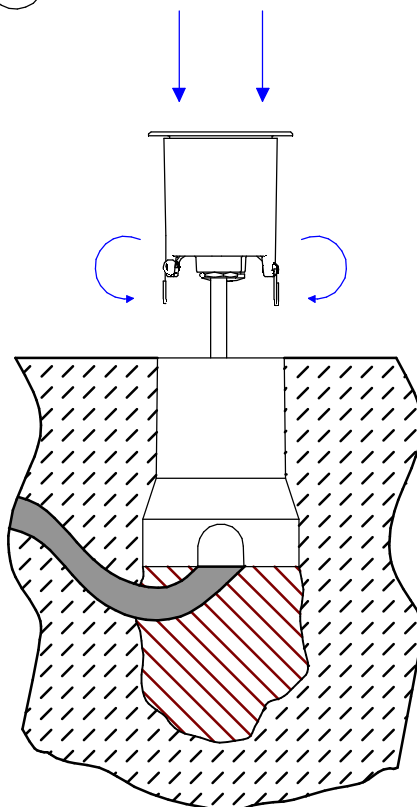

Suelo_R 4.2W
SueloPRO_R 4.2W


3.C

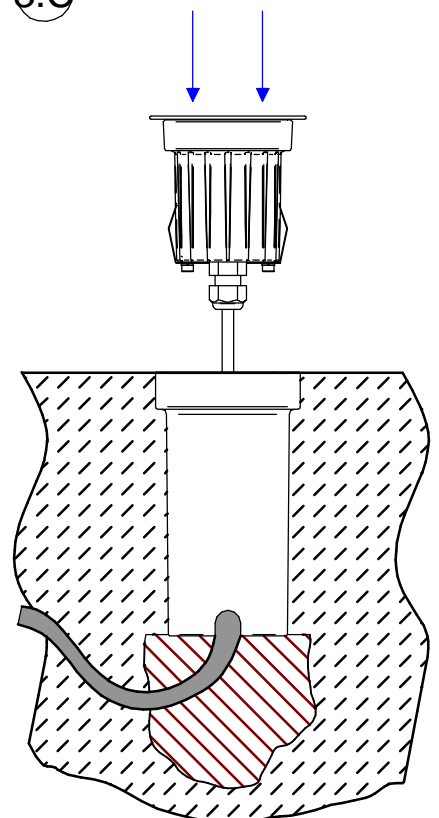

Suelo_R 7.2W
SueloPRO_R 7.2W

3.D


TOOL NOT INCLUDED
SCREWS INCLUDED

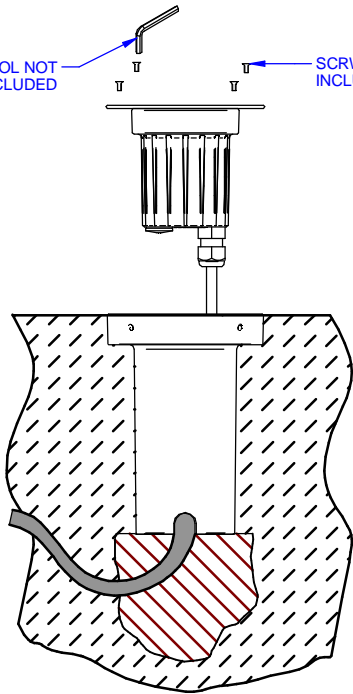

Suelo_RX
SueloPRO_RX

3.E


Tool not included

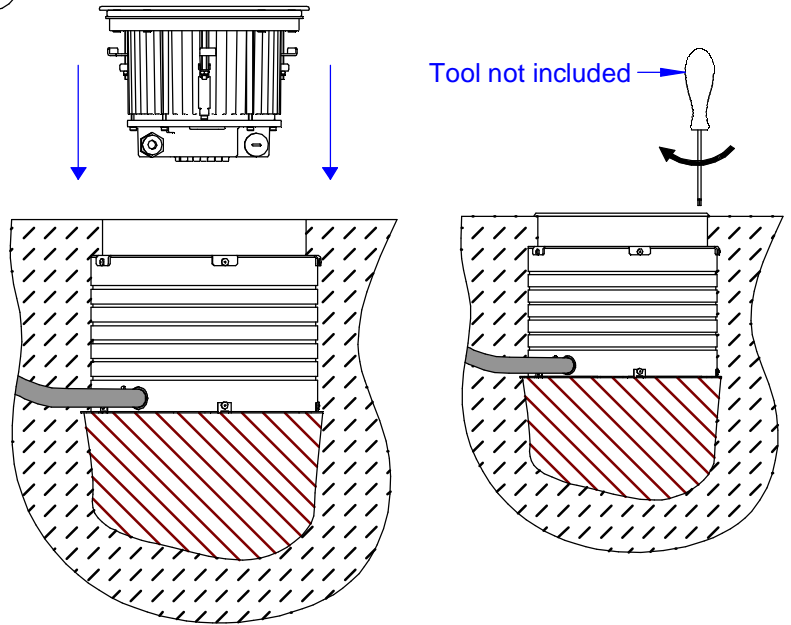


Only for Suelo_RX 30W
and Suelo_RX double 20W

SUELO ADJUSTABLE


1 **CAUTION!!**
TO PREVENT THREAD DAMAGES
KEEP THE FLANGE PRESSED AGAINST
THE BODY WHILE REMOVING IT.




CAUTION!!!
Do not unscrew the cap

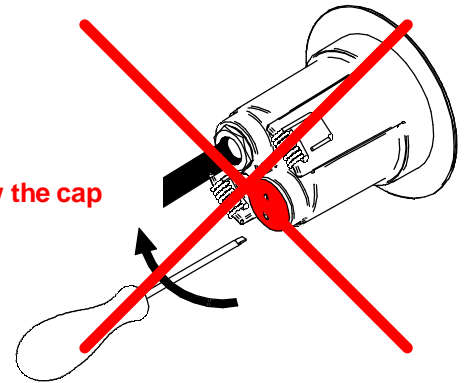

Only for Suelo_RX 30W and Suelo_RX double 20W
Remove the three screws and the locking system
Remove the six screws on the bottom side of the flange
Perform the steps backwards for reassembly

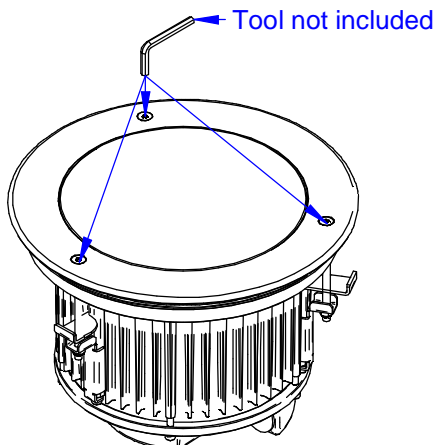


Tool not included

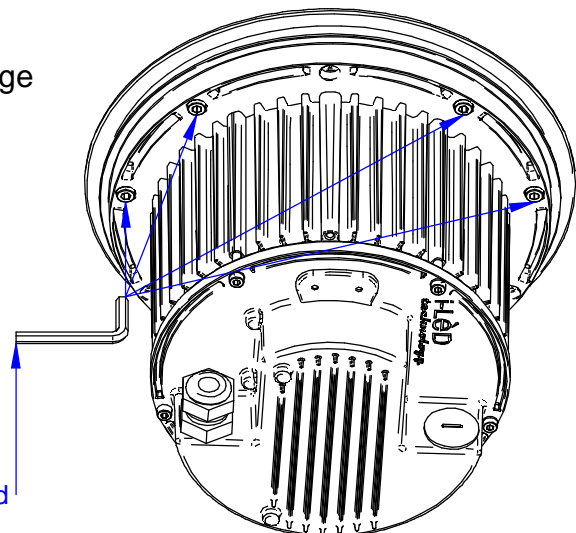


2.A

SLIGHTLY LOOSEN THE GRUB SCREW

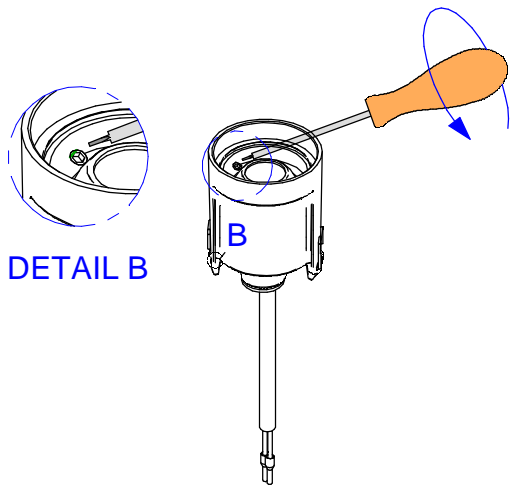


2.B

SLIGHTLY LOOSEN THE GREEN HIGHLIGHTED RING. NO TOOLS NEEDED.

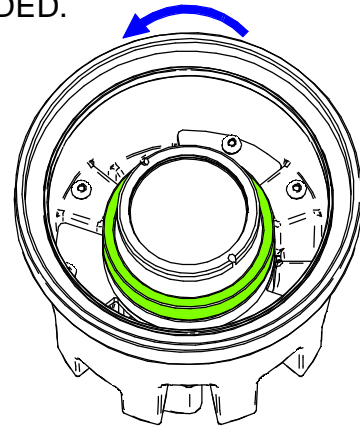


3.A

ADJUST THE OPTICS IN THE DESIRED POSITION

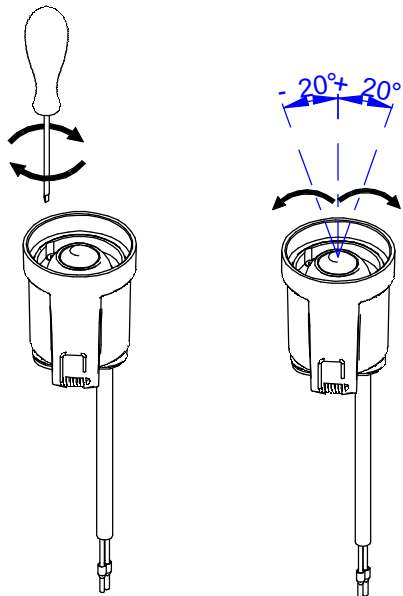


3.B

ADJUST THE OPTICS IN THE DESIRED POSITION

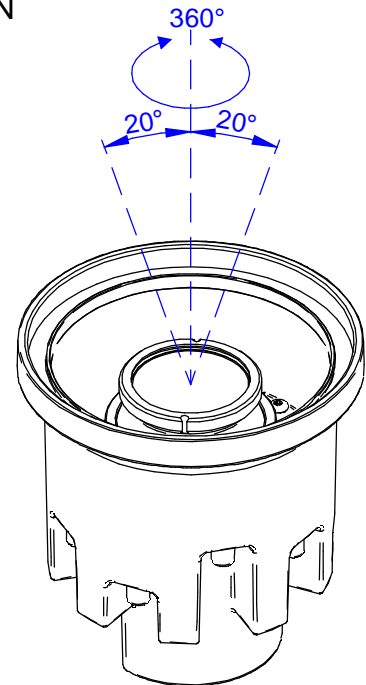


4.A

TIGHTEN THE GRUB SCREW

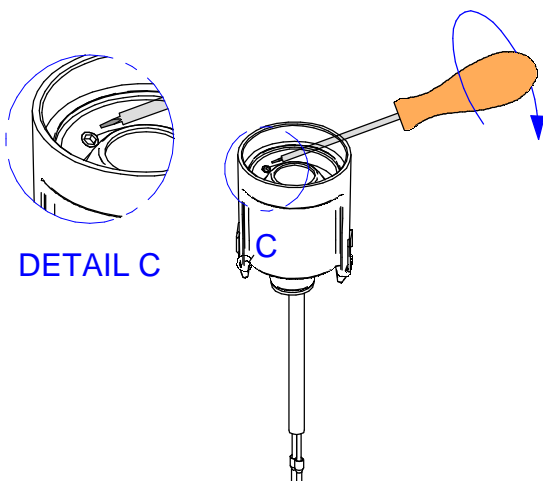


4.B


TIGHTEN THE GREEN HIGHLIGHTED RING. NO TOOLS NEEDED.

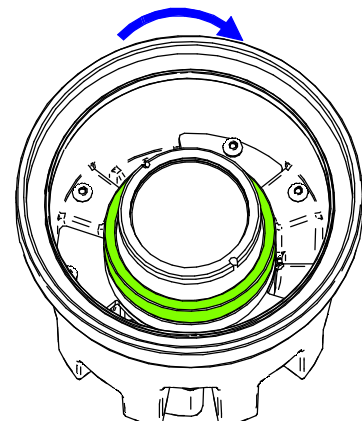

5

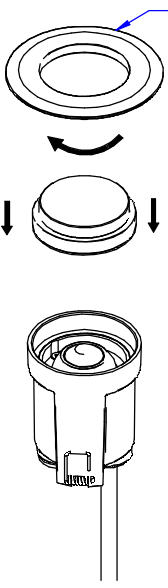


CAUTION!!
TO PREVENT THREAD DAMAGES
KEEP THE FLANGE PRESSED AGAINST
THE BODY WHILE REASSEMBLING IT.

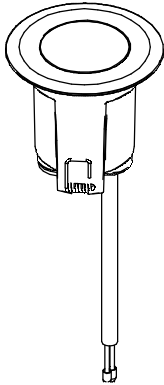


WIRING DIAGRAM

SINGLE SUELO FIXTURE
(REMOTE DRIVER)

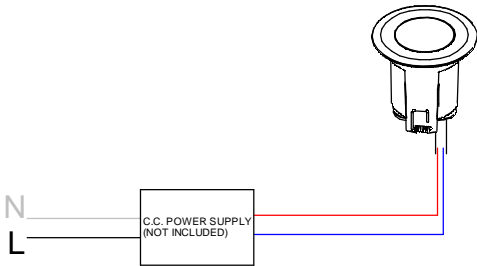


MULTIPLE FIXTURES WIRED IN SERIES
(CONSTANT CURRENT WITH REMOTE DRIVER)

The maximum number of connectable fixtures depends on the power supply

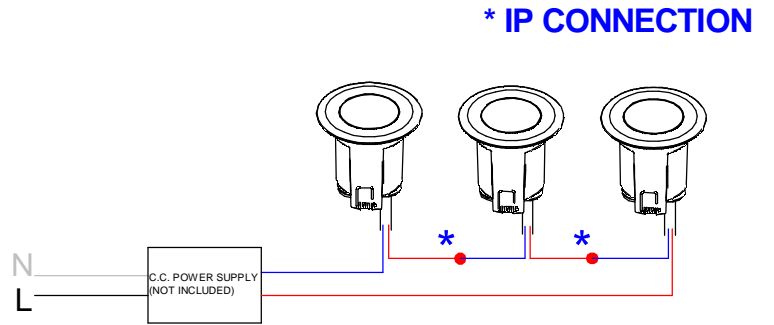


MULTIPLE FIXTURES WIRED IN PARALLEL
(24V CONSTANT VOLTAGE WITH REMOTE DRIVER)

The maximum number of connectable fixtures depends on the power supply

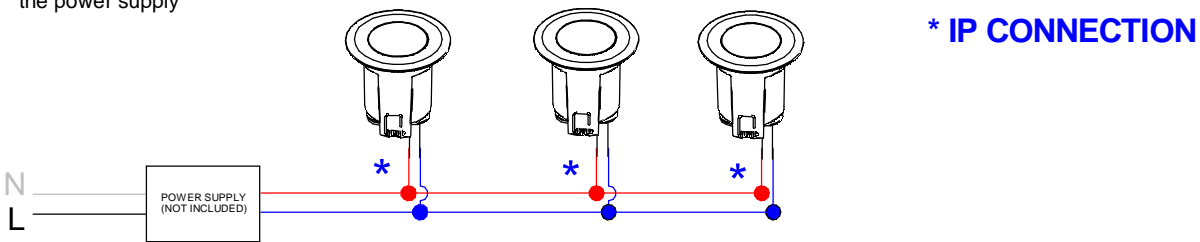



MULTIPLE SUELO FIXTURE (INTEGRAL DRIVER)

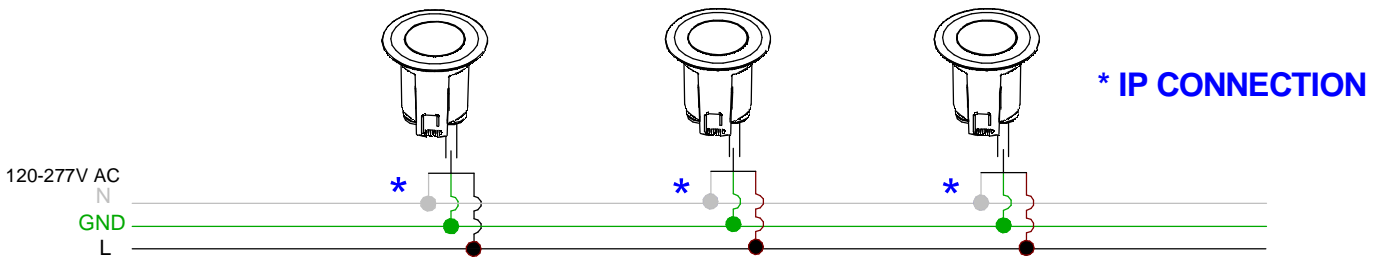

RGBW WIRING (DRIVER NOT INCLUDED)

* IP CONNECTION

120-277V AC

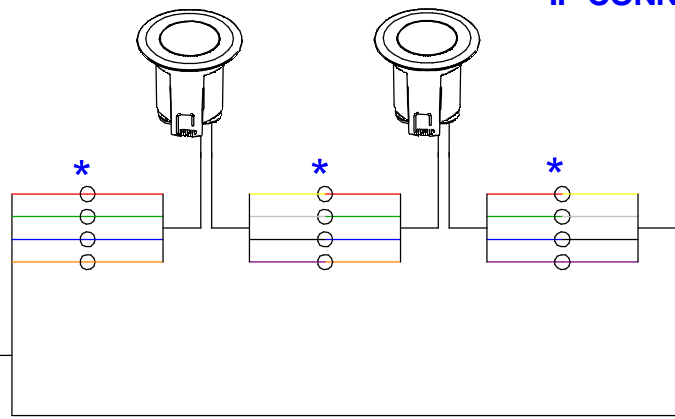

LED COLOR	CABLE COLOR +	CABLE COLOR -
RED	RED	RED/BLACK
GREEN	YELLOW	BLACK
BLUE	BLUE	BLUE/BLACK
WHITE	ORANGE	ORANGE/BLACK

LED COLOR	CABLE COLOR +	CABLE COLOR -
RED	RED	YELLOW
GREEN	GREEN	WHITE
BLUE	BLUE	BLACK
WHITE	ORANGE	PURPLE

CABLE COLOUR CHART UPDATED

Use the correct table depending on the cable installed

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

MOUNTING INSTRUCTIONS

READ ALL OF THESE INSTRUCTIONS BEFORE INSTALLING FIXTURES

- CAUTION: USE ONLY WITH CLASS 2 POWER UNIT
- Keep all of the instructions for future reference
- Turn off power before installing fixture
- Installation is to be performed by a qualified electrician only
- All installations must conform to the National Electrical Code as well as all local jurisdictional codes and regulations
- Any modification of the luminaire will void any and all written or implied warranties
- The manufacture accepts no responsibility for damage to persons or property arising through improper use or installation

SUELO INSTALLATION SEQUENCE

- Mount remote driver in accessible well ventilated space
- Ensure power is off before connecting driver to line voltage
- Install the outer casing (1)
- Connect secondary wiring to fixture wiring or mains wiring to mains fixture wiring (2)
- Insert the article into the opening. The fixing method changes depending on the model (3.A) (3.B) (3.C) (3.D) (3.E)
- WARNING: Be sure secondary wiring is connected to driver BEFORE energizing to avoid LED failure
- Energize

ADJUSTABLE OPTIC SETTING SEQUENCE

- Ensure power is off before performing optic setting sequence.
- Remove the flange (1). Follow the advice given next to the images.
- Slightly loosen the grub screw (2.A) or the ring (2.B)
- Adjust the optic using a screwdriver (3.A) or with your hands (3.B)
- Tighten the grub screw (4.A) or the ring (4.B)
- Reassemble the flange (5)
- Perform installation sequence.

Secondary Cable Colours	Pole
Red wire	+
Blue wire	-
Mains Cable Colours	Pole
Black wire	L
White wire	N
Green wire	Earth