












suelo range



	1 W	2 W	4.2 W	7.2 W	13 W	30 W
Suelo_R ○	Ø 1 in	Ø 1.2 in	Ø 2.5 in	Ø 3.6 in	-	-
Suelo_RJ ○ 	-	-	Ø 2.5 in	Ø 3.6 in	-	-
Suelo_RX ○	-	-	-	Ø 4.7 in	Ø 6.7 in	Ø 9.1 in
Suelo_RXJ ○ 	-	-	-	Ø 4.7 in	Ø 6.7 in	-
SueloPRO_R ○	Ø 1 in	Ø 1.4 in	Ø 2.5 in	Ø 3.6 in	-	-
SueloPRO_RX ○	-	Ø 2 in	-	Ø 4.7 in	Ø 7 in	-
Suelo_RX Double ○	-	-	-	-	Ø 7 in	Ø 9.1 in
Suelo Telescopic ○	-	-	-	-	Ø 7.5 in	Ø 7.5 in
Accessories	-	 Suelo, Suelo_X, Suelo Pro, Suelo Pro_X	  Suelo, Suelo_X, Suelo Pro, Suelo Pro_X	  Suelo, Suelo_X, Suelo Pro, Suelo Pro_X	  Suelo, Suelo_X, Suelo Pro, Suelo Pro_X	  Suelo, Suelo_X, Suelo Pro, Suelo Pro_X
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
Optics	Standard Medium Flood	Narrow Spot Spot Medium Flood Flood Wide Flood General	Spot Medium Flood Flood Elliptic Wide Flood General Asymmetric	Narrow Spot Spot Medium Flood Flood Elliptic Wide Flood General Asymmetric	Narrow Spot Spot Medium Flood Flood General Asymmetric	Narrow Spot Spot Medium Flood Flood Asymmetric
Optics	Pro Medium Flood	Spot Medium Flood Flood Elliptic General	Medium Flood Flood	Narrow Spot Spot Medium Flood Flood	Spot Medium Flood Flood Wide Flood Asymmetric	-
Driver	0-10V	0-10V	0-10V	0-10V	0-10V	0-10V
Current	C.C. C.V. (Suelo Pro)	C.C. C.V.	C.C. C.V.	C.C. C.V.	C.C.	C.C.

The range


The Suelo family offers a variety of solutions for every design need: fixed and swivel versions, small-flanged flush-mount uplights, and dimmer. There are pro models with recessed optics and RGBW sources, and beam control filters. All models have exclusive AquaStop® protection systems, and there are versions with 24-volt cable converters.



Visual comfort

Suelo can be used with a honeycomb filter, which screens secondary light and reduces glare, maintaining a high-quality diffuse light. A darklight filter directs the illumination onto one part of the wall by sectioning one part of the beam, and prevents glare even close to the source.

For full beam control and a drastically reduced glare risk, choose the Suelo PRO versions, in which the recessed source increases the screening angle, totally skimming off the secondary flow to give a cleaner, more concentrated and efficient light.

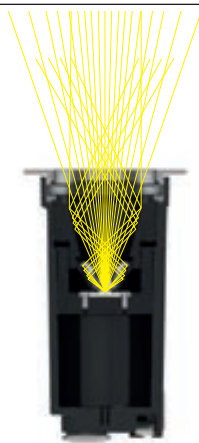

Suelo PRO



Suelo + Honeycomb




Suelo + Dark Light

Performance and control

There are five outputs to choose from, ranging from 1 to 30 watts, three color temperatures including warm light at 2700 and 3000K, and daylight at 4000K. The uniquely wide spectrum of optics includes an elliptic, a wall wash for high, narrow walls, and an asymmetric version that gives an even, homogenous wash.


Spot

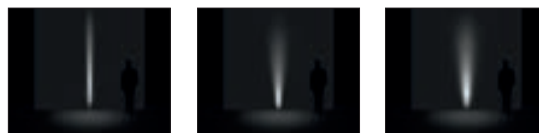


Flood




General



Asymmetric



Suelo_R | Up-Light | powerLED | Submersible | Driver remote | Driver over | 1W 350mA



Steel	E80432	2700K	136 lm	M	Medium Flood	20
		3000K	145 lm	W	Medium Flood	35
		4000K	155 lm	N		

Power supply options (remote only)


ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

Recessed casings



E99676
Outer casing for
ground-mounting
installation IP67

SueloPRO_R | Up-Light | powerLED | Submersible | Driver remote | Driver over | 1W



C.C. - 350mA

Steel	E80433	2700K	136 lm	M	Medium Flood	20
		3000K	145 lm	W	Medium Flood	35
		4000K	155 lm	N		

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

C.V. - 24V

Steel	E80434	2700K	136 lm	M	Medium Flood	20
		3000K	145 lm	W	Medium Flood	35
		4000K	155 lm	N		

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120-277VAC, Wet location

Recessed casings



E99677
Outer casing for
ground-mounting
installation
IP67/68



Comfort

Suelo_R | Up-Light | powerLED | Wet location | Driver remote | Walk over | 2W 630mA



Chrome E93141	2700K	219 lm	M	Narrow Spot	08
	3000K	233 lm	W	Spot	15
	4000K	249 lm	N	Medium Flood	30
				Flood	60
				Wide Flood	12
				General	00


Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures

Recessed casings



SueloPRO_R | Up-Light | powerLED | Wet location | Driver remote | Driver over | 2W



C.C. - 630mA


Steel/Alu E80439	2700K	205 lm	M	Spot	15
	3000K	233 lm	W	Medium Flood	30
	4000K	249 lm	N	Flood	60
				Elliptic	88
				General	00



Steel/Alu E80440	2700K	205 lm	M	Spot	15
	3000K	233 lm	W	Medium Flood	30
	4000K	249 lm	N	Flood	60

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures



C.V. - 24V

Steel/Alu E80441	2700K	205 lm	M	Spot	15
	3000K	233 lm	W	Medium Flood	30
	4000K	249 lm	N	Flood	60
				Elliptic	88
				General	00



Steel/Alu E80442	2700K	205 lm	M	Spot	15
	3000K	233 lm	W	Medium Flood	30
	4000K	249 lm	N	Flood	60



Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120-277VAC, Wet location

Recessed casings



Suelo_R | Up-Light | powerLED | Wet location | Driver remote | Driver over | 4.2W



C.C. - 350mA

Steel/Alu	E80443	2700K	490 lm	M	Spot	10
		3000K	490 lm	W	Medium Flood	20
		4000K	529 lm	N	Medium Flood	30
					Flood	60
					Elliptic	88
					Wide Flood	12
					General	00

Steel/Alu	E81089	2700K	490 lm	M	Asymmetric	07
		3000K	490 lm	W		
		4000K	529 lm	N		

HC	Steel/Alu	E80444	2700K	490 lm	M	Medium Flood	20
			3000K	490 lm	W	Medium Flood	30
			4000K	529 lm	N	Flood	60

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

C.V. - 24V

Steel/Alu	E80445	2700K	490 lm	M	Spot	10
		3000K	490 lm	W	Medium Flood	20
		4000K	529 lm	N	Medium Flood	30
					Flood	60
					Elliptic	88
					Wide Flood	12
					General	00

Steel/Alu	E81090	2700K	490 lm	M	Asymmetric	07
		3000K	490 lm	W		
		4000K	529 lm	N		

HC	Steel/Alu	E80446	2700K	490 lm	M	Medium Flood	20
			3000K	490 lm	W	Medium Flood	30
			4000K	529 lm	N	Flood	60

Power supply options (remote only)



OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120-277VAC, Wet location

Recessed casings



E84936
Outer casing for ground-mounting installation

SueloPRO_R | Up-Light | powerLED | Wet location | Driver remote | Driver over | 4.2W



C.C. - 350mA

Steel/Alu	E80449	2700K	490 lm	M	Medium Flood	20
		3000K	490 lm	W	Medium Flood	30
		4000K	529 lm	N	Flood	50



Steel/Alu **E80450**



Steel/Alu **E80451**

Power supply options (remote only)

ECO30W-350

0-10V EldoLED ECOdrive
30W for 1-3 fixtures

SOLO50W-350

0-10V EldoLED SOLOdrive
50W for 1-6 fixtures

SOLO100W-350

0-10V EldoLED SOLOdrive
100W for 1-12 fixtures

C.V. - 24V

Steel/Alu	E80452	2700K	490 lm	M	Medium Flood	20
		3000K	490 lm	W	Medium Flood	30
		4000K	529 lm	N	Flood	50



Steel/Alu **E80453**



Steel/Alu **E80454**

Power supply options (remote only)

OT96-D010

Osram, 10% 0-10V dim, 96W, 24V
DC, 120-277VAC, supplied in a Dry
location

OT96-JBX

Osram, Non-dim 24V DC,
120-277VAC, Wet location

Recessed casings



E84935

Outer casing for
ground-mounting
installation