

vedette




Vedette pairs a modern, minimalist design with a warm light to emphasise external architectural details. There are five different optics to choose from, including round and square, and single and double beam.

Materials

Anodized aluminum



Vedette_Q Single emission | Wall light | powerLED | Wet location | Driver remote | 2W 630mA




CRI 80

White	E96102	2700 K	219 lm	M	Narrow Spot	08
Black	E96103	3000 K	233 lm	W	Spot	15
Grey	E96104	4000 K	249 lm	N	Medium Flood	30
DarkBrown	E96105				Flood	60
					General	00

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures

Vedette_Q Single emission | Wall light | powerLED | Wet location | Driver remote | 8W 630mA




CRI 80

White	E96110	2700 K	610 lm	M	Spot	15
Black	E96111	3000 K	644 lm	W	Medium Flood	30
Grey	E96112	4000 K	711 lm	N	Flood	60
DarkBrown	E96113				General	00

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures

Vedette_Q Single emission | Wall light | 120-277V | powerLED | Wet location | Integral Driver | 16.4W 400mA




CRI 80

White	E96118	2700 K	1375 lm	M	Spot	15
Black	E96119	3000 K	1480 lm	W	Medium Flood	30
Grey	E96120	4000 K	1586 lm	N	Flood	60
DarkBrown	E96121				General	00

technical information

Vedette_Q Double emission | Wall light | powerLED | Wet location | Driver remote | 2W 350mA




CRI 80

White	E96106	2700 K	272 lm	M	Narrow Spot	08	
Black	E96107	3000 K	290 lm	W	Spot	15	
Grey	E96108	4000 K	310 lm	N	Medium Flood	30	
DarkBrown	E96109				Flood	60	
						General	00

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-6 fixtures	0-10V EldoLED SOLOdrive 50W for 1-12 fixtures	0-10V EldoLED SOLOdrive 100W for 1-24 fixtures


Vedette_Q Double emission | Wall light | 120-277V | powerLED | Wet location | Integral Driver | 9.6W 350mA



CRI 80

White	E96114	2700 K	818 lm	M	Spot	15
Black	E96115	3000 K	864 lm	W	Medium Flood	30
Grey	E96116	4000 K	954 lm	N	Flood	60
DarkBrown	E96117				General	00

Vedette_Q Double emission | Wall light | 120-277V | powerLED | Wet location | Integral Driver | 31.2W 350mA





CRI 80

White	E96122	2700 K	2486 lm	M	Spot	15
Black	E96123	3000 K	2676 lm	W	Medium Flood	30
Grey	E96124	4000 K	2868 lm	N	Flood	60
DarkBrown	E96125				General	00

technical information

Vedette_Q blade Single emission | Wall light | powerLED | Wet location | Driver remote | 6W 630mA





CRI 80

White	E97048	2700 K	657 lm	M	Narrow Spot	05
Black	E97049	3000 K	699 lm	W		
Grey	E97050	4000 K	747 lm	N		
DarkBrown	E97051					

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

Vedette_Q blade Double emission | Wall light | powerLED | Wet location | Driver remote | 12W 630mA





CRI 80

White	E97185	2700 K	1314 lm	M	Narrow Spot	05
Black	E97186	3000 K	1398 lm	W		
Grey	E97187	4000 K	1494 lm	N		
DarkBrown	E97188					

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-2 fixtures	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

Vedette_Q blade Double emission | Wall light | arrayLED | Wet location | Driver remote | 14.4W 630mA





CRI 80

White	E97052	2700 K	1342 lm	M	5°+ 60°	56
Black	E97053	3000 K	1486 lm	W		
Grey	E97054	4000 K	1684 lm	N		
DarkBrown	E97055					

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-2 fixtures	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

Vedette_Q blade Single emission | Wall light | 120-277V | powerLED | Wet location | Integral Driver | 28.8W 630mA





CRI 80

White	E91599	2700 K	2288 lm	M	Narrow Spot	05
Black	E91600	3000 K	2288 lm	W		
Grey	E91601	4000 K	2463 lm	N		
DarkBrown	E91602					

technical information

Vedette_Q asymmetric Single emission | Wall light | powerLED | Wet location | Driver remote | 6W 630mA



CRI 80



White	E81574	2700 K	685 lm	M	Asymmetric	07
Black	E81575	3000 K	739 lm	W		
Grey	E81576	4000 K	985 lm	N		
DarkBrown	E81577					

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures



Vedette_Q asymmetric Double emission | Wall light | powerLED | Wet location | Driver remote | 13.5W 630mA



CRI 80

White	E81578	2700 K	1324 lm	M	Asymmetric + 5°	62
Black	E81579	3000 K	1413 lm	W	Asymmetric + 30°	63
Grey	E81580	4000 K	1730 lm	N	Asymmetric + 60°	64
DarkBrown	E81581					


Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures




technical information


E81574W07

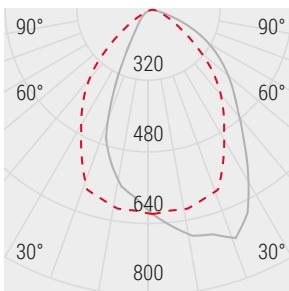


Photometric curve

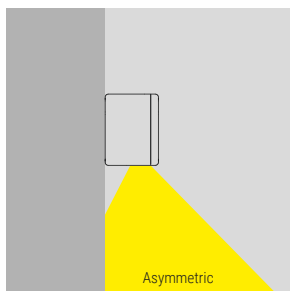

Light beam

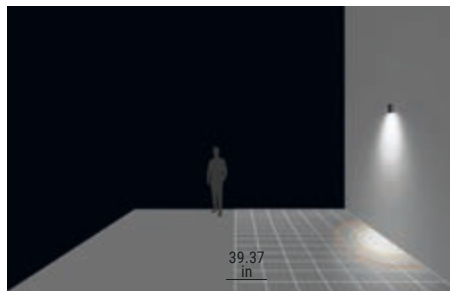

10 LUX 30 LUX 50 LUX 70 LUX

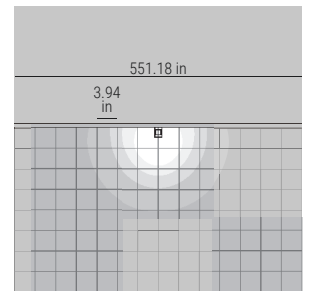

Floor plan