

Ice-Cut66


1:1 Actual size



Total diffusion: translucent
polycarbonate extruded
casing

Comfortable brightness:
perfectly distributed light
intensity within a **width of**
just 0.4 inches


Light slashes: fully
recessed mounting and
power supply cable outlet
located on the lower side
to create sensational light
carved motifs



Light and **compact** casing
to facilitate installation in
any space

Ice-Cut66 Linear light - SMD LEDs



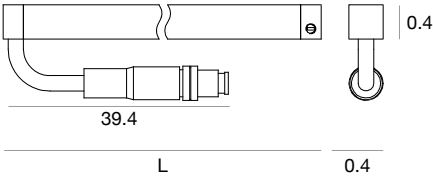


ETL wet location listed  C.V. IP66  



type	L inches			color	lumens			optic	
Anod AL	21	6	W	E96740	4000K	178	lm/ft	CRI 80	N Diff. 00
Anod AL	40.6	12	W	E96741	3000K	162	lm/ft	CRI 80	W
Anod AL	60.3	18	W	E96742	2700K	156	lm/ft	CRI 80	M

power supply options (remote only)

S	D010
Standard non-dim, 120-277V	1%, 0-10V dimming, 120-277V

Power cable (required)	Extension cable (optional)	Mounting bracket (included)
		 2 x
E99216  215	E98437  215	E98398