

# rubber



A LED strip covered in UV-stabilised polyurethane to protect it from the sun, and AquaStop® technology to keep out spray and moisture. At up to 10 metres a roll, Rubber's flexible body contains a polyurethane resin diffuser that creates eye-catching and perfectly uniform lines of light. Also available in an RGB version.

---

### Versatility for every solution

Rubber is available with polyurethane covering for standard applications with temperatures between -20°C and +45°C. Available in two versions, 2D and 3D bend, to adapt to any design needs. The Rubber range includes numerous accessories, including recessed casings and clips to fasten the strips, both in the versions with or without wire hole.

The option with wire hole allows the power cable to be concealed from view, preserving its integrity. The space also becomes useful for running other wires. The small, toothed clips retain the flexible polyurethane body of the strip, allowing routing variations.



### Customisation

In addition to the proposed dimensions, the length of the strip can be customised upon request. The custom version is sealed in the factory with the same procedure as the standard models in order to ensure the same production quality.

The customer can also cut the standard 3D bend (every 45 mm) and 2D bend (every 50 mm) version and seal the cut end using the special 99539 KIT, sold separately, maintaining the original product warranty.



---

### 3D bend

Rubber is one of a kind. Its new, patented internal circuit structure means the strip can be bent in any direction, creating a whole new spectrum of applications. The five-metre rolls can easily be cut every 45 millimetres for maximum versatility.





---

### Maximum reliability and performance

The unit is UV stabilised to protect it from the sun, with IP67 and IK10 ratings and high standards of electrical, thermal and mechanical safety complying with EN 60598-1.

This, combined with its exceptional output of 1,100 lm/m, means that Rubber is second to none when it comes to performance and reliability.










# Rubber 3D\_bend RGBW | LED strip | 16,5 W/m 24 V



Opaline 1 m **E80403** RGBW (3000K)

### Electronics

- RF driver CV 985
- DMX driver CV 985
- DMX controllers 995
- driver CV 24V 981-982
- switching CV 24V 986-989



Made in Italy



3 years warranty




hi-resolution



SDCM




RGBW



Opaline 5 m **E80404** RGBW (3000K)

### Electronics

- RF driver CV 985
- DMX driver CV 985
- DMX controllers 995
- driver CV 24V 981-982
- switching CV 24V 986-989

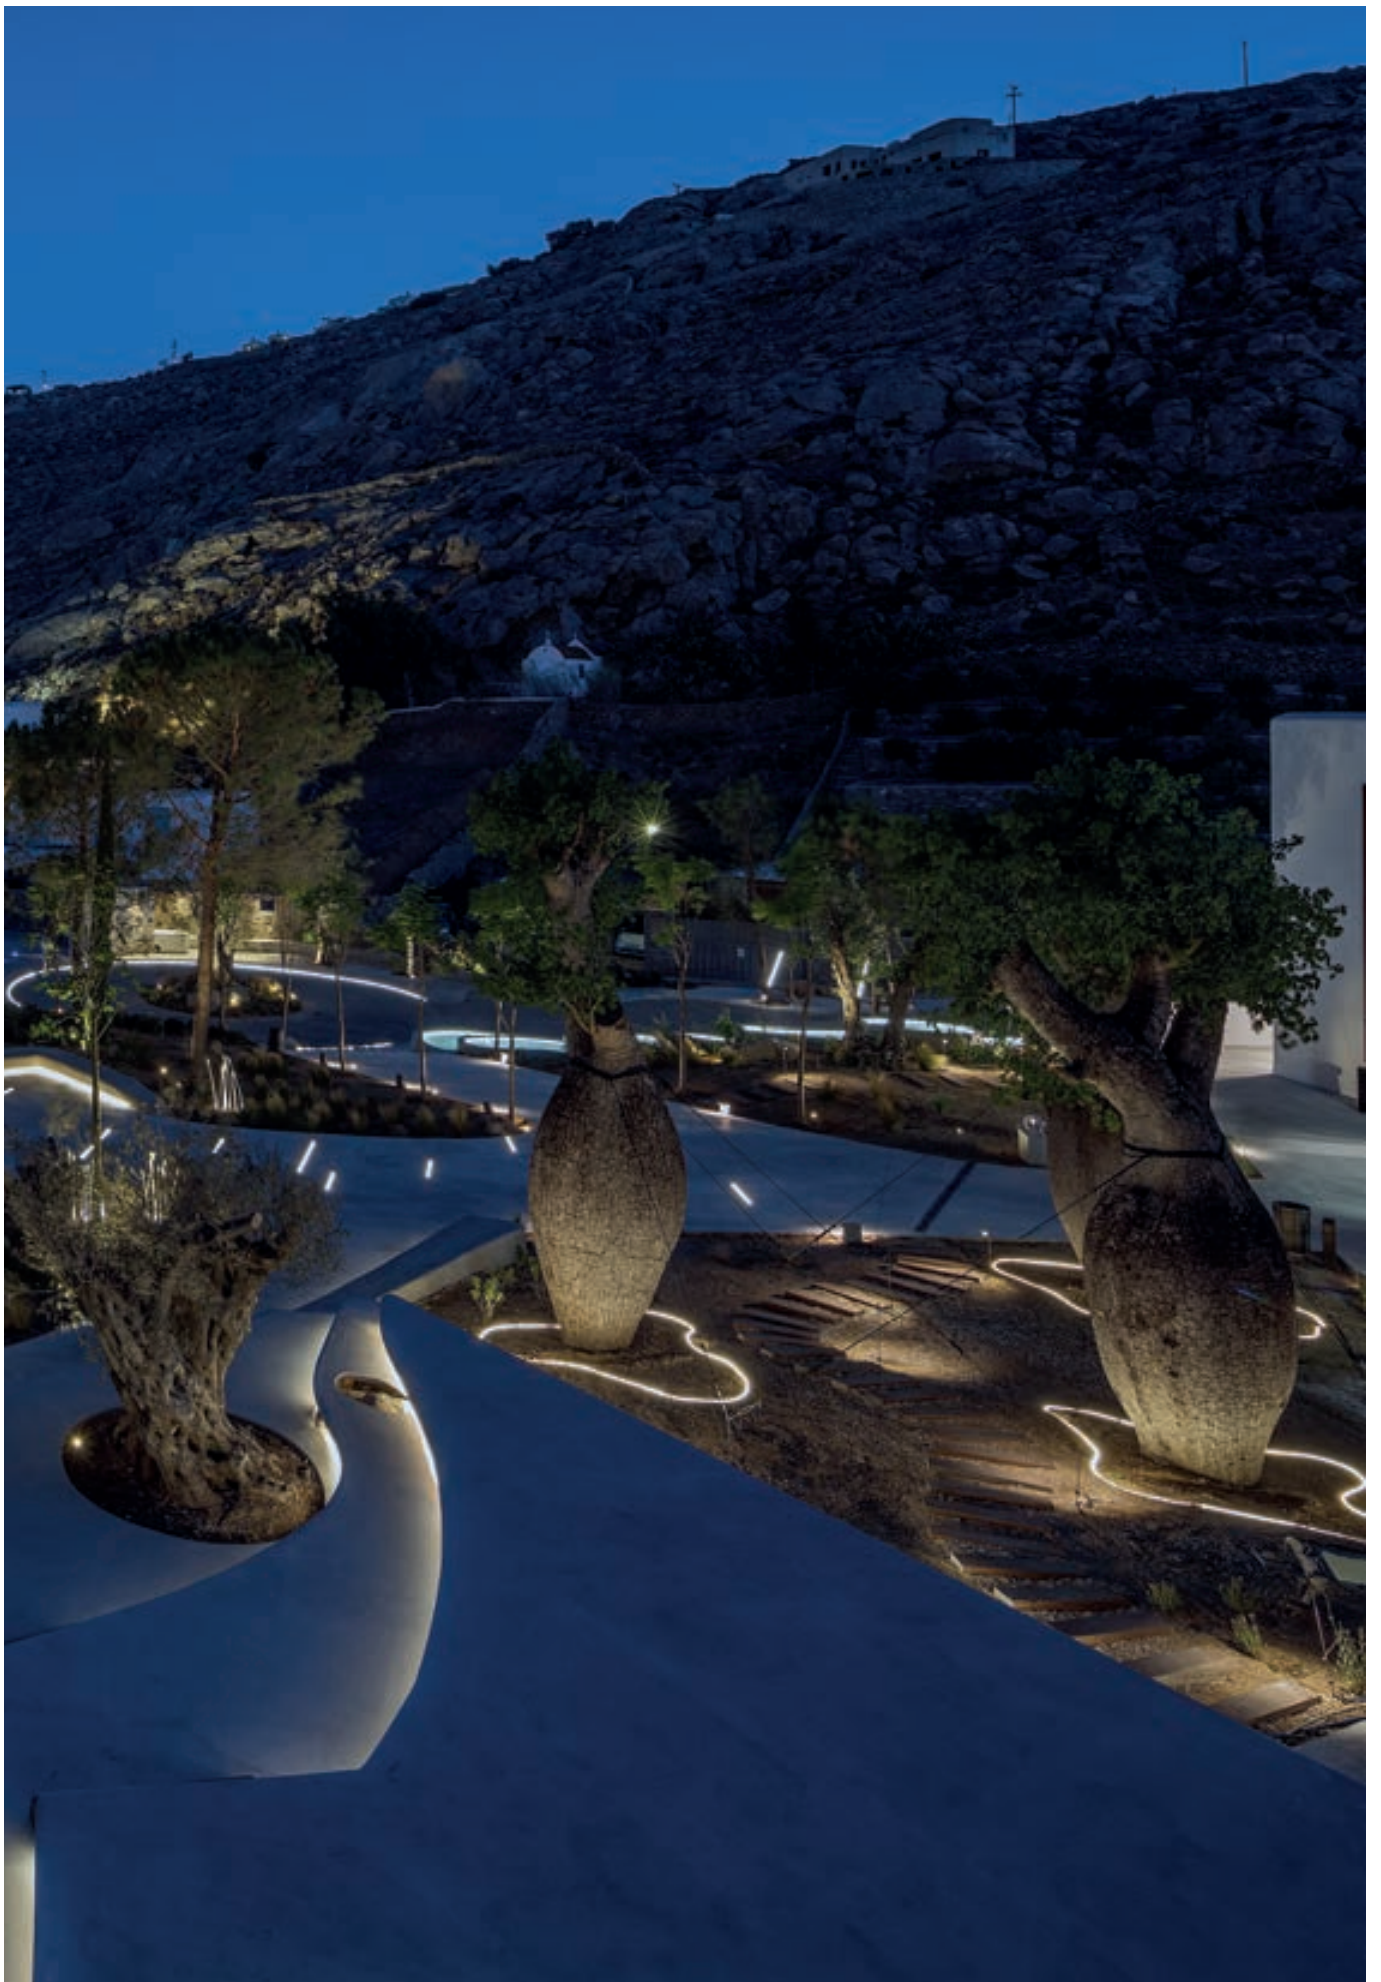

### Rubber Accessories | Linear profile




Anod. Al. **E99549**

Rubber Side\_bend  
Rubber 3D

1000 mm 19 mm 18 mm

### Rubber Accessories | Linear profile with cable run



Anod. Al. **E99535**

Rubber Side\_bend  
Rubber 3D

1000 mm 21 mm 41 mm

### Rubber Accessories | Clip with toothed spring



Anod. Al. **E99536**

Rubber Side\_bend  
Rubber 3D

50 mm 21 mm 23 mm

### Rubber Accessories | Clip with toothed spring with cable run



Anod. Al. **E99537**

Rubber Side\_bend  
Rubber 3D

50 mm 21 mm 41 mm

Rubber Accessories PU\_C | Cable with female connector



**E99688** 2 m extension + 2-pole female connector

Rubber Accessories | Cable with female connector



**E99692** 2 m extension + 5-pole female connector

Rubber Accessories PU\_C | Cable with male connector



**E99689** 2 m extension + 2-pole male connector

Rubber Accessories | Cable with male connector



**E99693** 2 m extension + 5 pole male connector

Rubber Accessories | Cap kits



**E99539** Kit with 2 polyurethane caps

