

xenia




The new Xenia family comprises a very wide range of linear lights, with numerous configurations for every lighting need. They provide a high-performance solution for lighting professionals, offering reliable safety technology including OVP, ESD, TCS® and AcquaStop®. There is also a wide choice of topLED and powerLED outputs, and optics. The range is available in warm white, natural white, and RGBW versions.

Materials

Anodized 6060 aluminum alloy body



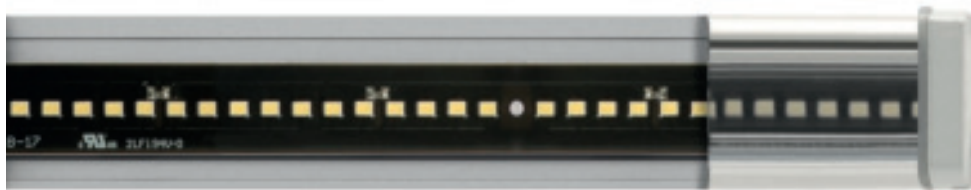

**Xenia_W
TopLED 24V**



**Xenia_W
PowerLED 24V**



**Xenia_W PRO
PowerLED 24V**


	_W 	_W Pro 	_A 	_A Pro 
length	14.4 -> 60.2 in	14.4 -> 60.2 in	14.1 -> 59.8 in	14.1 -> 59.8 in
topLED	2700K - 3000K 3500K - 4000K RGBW+W - RGBW+N	-	2700K - 3000K 3500K - 4000K RGBW+W - RGBW+N	
powerLED	-	2700K - 3000K 3500K - 4000K RGBW+W - RGBW+N		2700K - 3000K 3500K - 4000K RGBW+W - RGBW+N
Optics	Narrow Flood - Flood Wide Flood - Asymmetric General	Narrow Spot - Narrow Flood Flood - Wide Flood Asymmetric - Elliptical	Narrow Flood - Flood Wide Flood - Asymmetric	Narrow Spot - Spot Narrow Flood - Flood Wide Flood - Asymmetric General - Wall Grazing
Finish				
Driver remote	0-10V DMX (RGBW)	0-10 V DMX (RGBW)	0-10V DMX (RGBW)	0-10 V DMX (RGBW)
Integral Driver	On/Off	On/Off 0-10V	DMX	DMX
Mounting	Surface mounted with brackets	Surface mounted with brackets	In-grade / Ceiling or wall recessed	In-grade / Ceiling or wall recessed

High-quality construction

Xenia is made from very high-quality materials and components. Because of the way in which they are manufactured, these lights are able to maintain their performance in temperatures ranging from a glacial -4°F to a sultry +140°C. They are also highly corrosion resistant, thanks to their use of 6060 aluminum alloy and 10-micron anodization.


Safety systems

We have developed a variety of corrosion protection technology to maximize the lifespan of our lights. They also have overtension and electrical discharge protection, TCS® to protect their circuits from moisture.

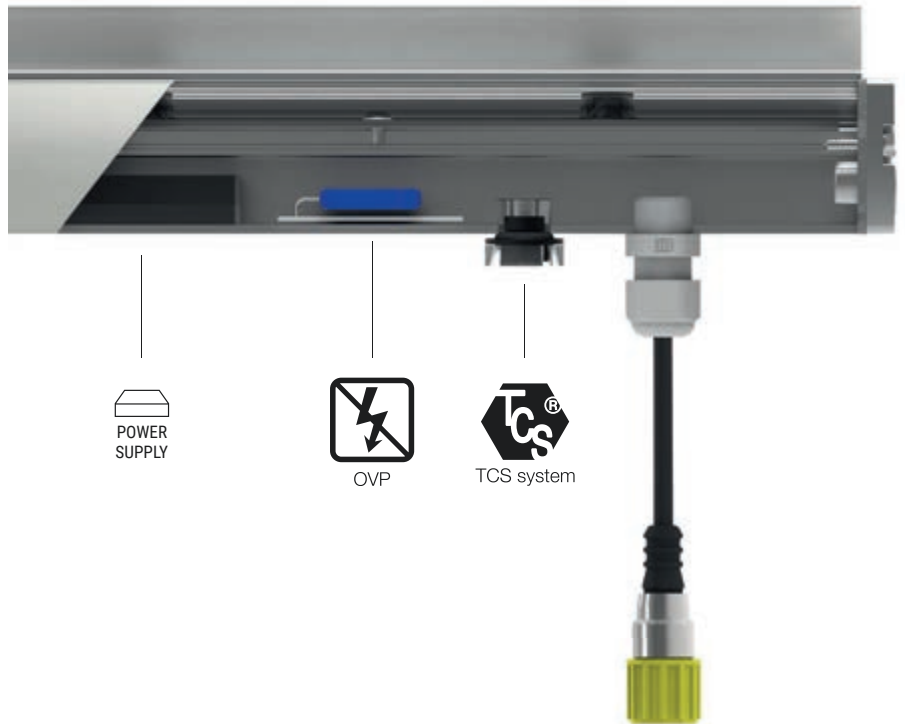

Wall-mounted versions

- Multiple fixing sizes for grazing installations
- Graduated body rotation
- Antiglare shade
- Five sizes, from 14.2 to 59.1 inch
- Optics: flood, Narrow Flood, wide flood, asymmetric, general





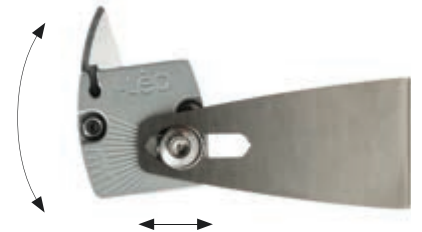


Recessed versions

- Extra-thin housing: frame only 0.12 inch thick
- Individual fixtures don't have end caps, allowing multiple lights to be installed back to back to create a continuous run.
- End caps can then be placed at the end of the run and adapted to the housing so that the whole body of the luminaire is enclosed.
- Anti-glare shade (darklight)
- Five lengths available, from nominal 14" to 60"
- Variety of optics: from narrow spot to wide flood, asymmetric, and general illumination



Xenia_W | Linear profiles | 24V | topLED | Wet location | Driver remote



6.5W

Anod. AL.	E93786	2700K 764 lm	M	Narrow Flood	20
		3000K 801 lm	W	Flood	50
		3500K 801 lm	T	Wide Flood	90
		4000K 838 lm	N	Asymmetric	07
				General	00

13W

Anod. AL.	E93825	2700K 1528 lm	M	Narrow Flood	20
		3000K 1602 lm	W	Flood	50
		3500K 1602 lm	T	Wide Flood	90
		4000K 1676 lm	N	Asymmetric	07
				General	00

20W

Anod. AL.	E93828	2700K 2292 lm	M	Narrow Flood	20
		3000K 2403 lm	W	Flood	50
		3500K 2403 lm	T	Wide Flood	90
		4000K 2514 lm	N	Asymmetric	07
				General	00

26W

Anod. AL.	E93829	2700K 3056 lm	M	Narrow Flood	20
		3000K 3204 lm	W	Flood	50
		3500K 3204 lm	T	Wide Flood	90
		4000K 3352 lm	N	Asymmetric	07
				General	00

33W

Anod. AL.	E81696	2700K 3820 lm	M	Narrow Flood	20
		3000K 4005 lm	W	Flood	50
		3500K 4005 lm	T	Wide Flood	90
		4000K 4190 lm	N	Asymmetric	07
				General	00

Steel fixing brackets



1.8-2.6 in	E98949
3.5 in	E89045
5.9 in	E89046
11.8 in	E89047

Anti-glaring accessory



14.4 in	E98782
24.8 in	E98783
36.6 in	E98784
48.4 in	E98785
60.2 in	E99778

Power supply options (remote only)

OT96-D010


Osram, 10% 0-10V
dim, 96W, 24VDC, 120-
277VAC, supplied in a Dry
location enclosure

OT96-JBX

Osram, Non-Dim, 96W,
24VDC, 120-277VAC,
Wet Location


technical
information

Xenia_W ON/OFF | Linear profiles | 120V-ONLY | topLED | Wet location | Integral Driver




7.2W

Anod. Al.	On/Off	E93688	2700K	764 lm	M	Narrow Flood	20
			3000K	801 lm	W	Medium Flood	50
			3500K	801 lm	T	Flood	90
			4000K	838 lm	N	Asymmetric	07
						General	00




14.2W

Anod. Al.	On/Off	E93689	2700K	1528 lm	M	Narrow Flood	20
			3000K	1602 lm	W	Medium Flood	50
			3500K	1602 lm	T	Flood	90
			4000K	1676 lm	N	Asymmetric	07
						General	00




21.4W

Anod. Al.	On/Off	E94020	2700K	2292 lm	M	Narrow Flood	20
			3000K	2403 lm	W	Medium Flood	50
			3500K	2403 lm	T	Flood	90
			4000K	2514 lm	N	Asymmetric	07
						General	00



27.8W

Anod. Al.	On/Off	E94023	2700K	3056 lm	M	Narrow Flood	20
			3000K	3204 lm	W	Medium Flood	50
			3500K	3204 lm	T	Flood	90
			4000K	3352 lm	N	Asymmetric	07
						General	00



37W

Anod. Al.	On/Off	E81695	2700K	3820 lm	M	Narrow Flood	20
			3000K	4005 lm	W	Medium Flood	50
			3500K	4005 lm	T	Flood	90
			4000K	4190 lm	N	Asymmetric	07
						General	00

Steel fixing brackets



1.8-2.6 in	E98949
3.5 in	E89045
5.9 in	E89046
11.8 in	E89047

Anti-glaring accessory



14.4 in	E98782
24.8 in	E98783
36.6 in	E98784
48.4 in	E98785
60.2 in	E99778

Cables

E83043

59 in. line volt.
power feed cable
F 3 pin M12

E83044

196 in. line volt.
power feed cable
F 3 pin M12

E83045

59 in. line volt.
power extension
cable
M+F 3 pin M12

E83046

196 in. line volt.
power extension
cable
M+F 3 pin M12



E83047

393 in. line volt.
power extension
cable
M+F 3 pin M12

technical
information

Xenia_W RGBW DMX | Linear profiles | 24V + Integral DMX Interface | topLED | Wet location | Driver remote


RGBW
Quad-chip LED


13W

Anod. Al.	E94054	RGBW natural white	Q	Narrow Flood	20
		RGBW warm white	V	Flood	50
				Wide Flood	90
				Asymmetric	07
				General	00

24W

Anod. Al.	E94057	RGBW natural white	Q	Narrow Flood	20
		RGBW warm white	V	Flood	50
				Wide Flood	90
				Asymmetric	07
				General	00

Power supply options (remote only. DMX control required/by others)
OT96-D010*

Osram, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure. *Must be wired as non-dim.

OT96-JBX

Osram, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure.

Steel fixing brackets


1.8-2.6 in	E98949
3.5 in	E89045
5.9 in	E89046
11.8 in	E89047

Anti-glaring accessory






19.7 in	E98953
46.5 in	E98952

Cables

E99216 59 in. low volt. power feed cable F 4 pin M12	E89190 196 in. low volt. power feed cable F 4 pin M12	E98437 39 in. low volt. power extension cable M+F 4 pin M12	E98149 196 in. low volt. power extension cable M+F 4 pin M12	E89188 393 in. low volt. power extension cable M+F 4 pin M12	E89189 196 in DMX cable M 5 pin M12
E89186 196 in DMX cable M 5 pin M12 + M 3 pin XLR	E98494 196 in DMX cable M 5 pin M12 + F 3 pin XLR	E98493 196 in DMX cable M 5 pin M12 + M 5 pin XLR	E98994 39 in DMX extension 0-10V M+F 5 pin M12	E98993 196 in DMX extension 0-10V M+F 5 pin M12	E89187 393 in DMX extension 0-10V M+F 5 pin M12

technical
information

Xenia_W | Linear profiles | powerLED | 630mA | Wet location | Driver remote



6W

Anod. AL. E93690	2700K	703 lm	M	Narrow Flood	20
3 LEDs	3000K	703 lm	W	Flood	50
	3500K	703 lm	T	Wide Flood	90
	4000K	749 lm	N	Elliptic	25
				Asymmetric	07

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECODrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

12W

Anod. AL. E93691	2700K	1406 lm	M	Narrow Flood	20
6 LEDs	3000K	1406 lm	W	Flood	50
	3500K	1406 lm	T	Wide Flood	90
	4000K	1498 lm	N	Elliptic	25
				Asymmetric	07

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECODrive 30W for 1-2 fixtures	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

18W

Anod. AL. E93755	2700K	2109 lm	M	Narrow Flood	20
9 LEDs	3000K	2109 lm	W	Flood	50
	3500K	2109 lm	T	Wide Flood	90
	4000K	2247 lm	N	Elliptic	25
				Asymmetric	07

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECODrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

24W

Anod. AL. E93785	2700K	2812 lm	M	Narrow Flood	20
12 LEDs	3000K	2812 lm	W	Flood	50
	3500K	2812 lm	T	Wide Flood	90
	4000K	2996 lm	N	Elliptic	25
				Asymmetric	07

Power supply options (remote only)

SOLO50W-630	SOLO100W-630
0-10V EldoLED SOLOdrive 50W for 1 fixture	0-10V EldoLED SOLOdrive 100W for 1-3 fixtures

Steel fixing brackets



1.8-2.6 in	E98949
3.5 in	E89045
5.9 in	E89046
11.8 in	E89047

Anti-glaring accessory








14.4 in	E98782
24.8 in	E98783
36.6 in	E98784
48.4 in	E98785

technical
information



Xenia_W PRO | Linear profiles | 120/277V | powerLED | Wet location | Integral Driver



9W

Anod. AL	On/Off	E81702*	2700K	956 lm	M	Narrow Spot	08
			3000K	1025 lm	W	Narrow Flood	20
			3500K	1025 lm	T	Flood	50
			4000K	1164 lm	N	Wide Flood	90
						Elliptic	25
						Asymmetric	07

17.1W

Anod. AL	On/Off	E81703	2700K	1835 lm	M	Narrow Spot	08
			3000K	1964 lm	W	Narrow Flood	20
			3500K	1964 lm	T	Flood	50
			4000K	2238 lm	N	Wide Flood	90
						Elliptic	25
						Asymmetric	07

26.2W

Anod. AL	On/Off	E81704	2700K	2753 lm	M	Narrow Spot	08
Anod. AL	0-10V	E81709	3000K	2946 lm	W	Narrow Flood	20
			3500K	2946 lm	T	Flood	50
			4000K	3357 lm	N	Wide Flood	90
						Elliptic	25
						Asymmetric	07


35.4W

Anod. AL	On/Off	E81705	2700K	3671 lm	M	Narrow Spot	08
Anod. AL	0-10V	E81710	3000K	3928 lm	W	Narrow Flood	20
			3500K	3928 lm	T	Flood	50
			4000K	4476 lm	N	Wide Flood	90
						Elliptic	25
						Asymmetric	07

44W

Anod. AL	On/Off	E81706	2700K	4588 lm	M	Narrow Spot	08
Anod. AL	0-10V	E81711	3000K	4910 lm	W	Narrow Flood	20
			3500K	4910 lm	T	Flood	50
			4000K	5594 lm	N	Wide Flood	90
						Elliptic	25
						Asymmetric	07

On/Off



0-10V



technical
information

Steel fixing brackets



1.8-2.6 in	E98949
3.5 in	E89045
5.9 in	E89046
11.8 in	E89047

Anti-glaring accessory





14.4 in	E98782
24.8 in	E98783
36.6 in	E98784
48.4 in	E98785
60.2 in	E99778

Cables

E83043 59 in. line volt. power feed cable F 3 pin M12	E83044 196 in. line volt. power feed cable F 3 pin M12	E83045 59 in. line volt. power extension cable M+F 3 pin M12	E83046 196 in. line volt. power extension cable M+F 3 pin M12	E83047 393 in. line volt. power extension cable M+F 3 pin M12
E89189 196.9 in 0-10V cable M 5 pin M12	E98994 39.4 in 0-10V extension M+F 5 pin M12	E98993 196.9 in 0-10V extension M+F 5 pin M12	E89187 393.7 in 0-10V extension M+F 5 pin M12	

Xenia_W Pro RGBW DMX | Linear profiles | 120-ONLY + Integral DMX Interface | powerLED | Wet location



8.5 W

Anod. AL	E93606	RGBW natural white	Q	Elliptic	25
3 x 4 LEDs		RGBW warm white	V		

22.6 W

Anod. AL	E93607	RGBW natural white	Q	Elliptic	25
8 x 4 LEDs		RGBW warm white	V		

Steel fixing brackets



1.8-2.6 in	E98949
3.5 in	E89045
5.9 in	E89046
11.8 in	E89047

Anti-glaring accessory








19.7 in	E98951
46.5 in	E98952

Cables

E83043 59 in. line volt. power feed cable F 3 pin M12	E83044 196 in. line volt. power feed cable F 3 pin M12	E83045 59 in. line volt. power extension cable M+F 3 pin M12	E83046 196 in. line volt. power extension cable M+F 3 pin M12	E83047 393 in. line volt. power extension cable M+F 3 pin M12	E89189 196.9 in DMX cable M 5 pin M12
E89186 196.9 in DMX cable M 5 pin M12 + M 3 pin XLR	E98494 196.9 in DMX cable M 5 pin M12 + F 3 pin XLR	E98493 196.9 in DMX cable M 5 pin M12 + M 5 pin XLR	E98994 39.4 in DMX extension 0-10V M+F	E98993 196.9 in DMX extension 0-10V M+F	E89187 393.7 in DMX extension 0-10V M+F

technical
information



Xenia_A | Linear profiles | 24V | topLED | Wet location | Driver remote | Drive over | 6.1W/ft

6.5W

Anod. Al.	E81453	2700K	764 lm	M	Narrow Flood	20
		3000K	801 lm	W	Flood	50
		3500K	801 lm	T	Wide Flood	90
		4000K	838 lm	N	Asymmetric	07

13W

Anod. Al.	E81454	2700K	1528 lm	M	Narrow Flood	20
		3000K	1602 lm	W	Flood	50
		3500K	1602 lm	T	Wide Flood	90
		4000K	1676 lm	N	Asymmetric	07

19.5W

Anod. Al.	E81455	2700K	2292 lm	M	Narrow Flood	20
		3000K	2403 lm	W	Flood	50
		3500K	2403 lm	T	Wide Flood	90
		4000K	2514 lm	N	Asymmetric	07

26W

Anod. Al.	E81456	2700K	3056 lm	M	Narrow Flood	20
		3000K	3204 lm	W	Flood	50
		3500K	3204 lm	T	Wide Flood	90
		4000K	3352 lm	N	Asymmetric	07

32.5W

Anod. Al.	E81621	2700K	3820 lm	M	Narrow Flood	20
		3000K	4005 lm	W	Flood	50
		3500K	4005 lm	T	Wide Flood	90
		4000K	4190 lm	N	Asymmetric	07

In-grade outer casings


14.17 in	E99761
24.4 in	E99762
36.2 in	E99763
48 in	E99764
59.8 in	E99765

End caps(pair)

One pair required per in-grade run


E99766

 Ceiling or wall recessed
installation spring

E99818
Cables
E99216

 59 in. low volt.
power feed cable
F 4 pin M12

E89190

 196 in. low volt.
power feed cable
F 4 pin M12

E98437

 39 in. low volt.
power extension
cable
M+F 4 pin M12

E98149

 196 in. low volt.
power extension
cable
M+F 4 pin M12

E89188

 393 in. low volt.
power extension
cable
M+F 4 pin M12

Power supply options (remote only)
OT96-D010

 Osram, 10% 0-10V
dim, 96W, 24VDC, 120-
277VAC, supplied in a Dry
location enclosure



OT96-JBX

 Osram, Non-Dim, 96W,
24VDC, 120-277VAC,
Wet Location

 technical
information

Xenia_A RGBW DMX | Linear profiles | 120V + Integral DMX interface | topLED_ONLY | Wet location | Integral Driver | Drive over


RGBW
Quad-chip LED





13W	RGBW natural white	Q	Narrow Flood	20
Anod. AL. E81939	RGBW warm white	V	Flood	50
			Wide Flood	90
			Asymmetric	07
24W	RGBW natural white	Q	Narrow Flood	20
Anod. AL. E81940	RGBW warm white	V	Flood	50
			Wide Flood	90
			Asymmetric	07

Cables

E83043 59 in. line volt. power feed cable F 3 pin M12	E83044 196 in. line volt. power feed cable F 3 pin M12	E83045 59 in. line volt. power extension cable M+F 3 pin M12	E83046 196 in. line volt. power extension cable M+F 3 pin M12	E83047 393 in. line volt. power extension cable M+F 3 pin M12	E89189 196 in. DMX cable M 5 pin M12
E89186 196 in. DMX cable M 5 pin M12 + M 3 pin XLR	E98494 196 in. DMX cable M 5 pin M12 + F 3 pin XLR	E98493 196 in. DMX cable M 5 pin M12 + M 5 pin XLR	E98994 39 in. DMX extension 0-10V M+F 5 pin M12	E98993 196 in. DMX extension 0-10V M+F 5 pin M12	E89187 393 in. DMX extension 0-10V M+F 5 pin M12

Xenia_A RGBW DMX | Linear profiles | 24V + Integral DMX interface | topLED | Wet location | Driver remote | Drive over


RGBW
Quad-chip LED



12W	RGBW natural white	Q	Narrow Flood	20
Anod. AL. E81983	RGBW warm white	V	Flood	50
			Wide Flood	90
			Asymmetric	07
22W	RGBW natural white	Q	Narrow Flood	20
Anod. AL. E81984	RGBW warm white	V	Flood	50
			Wide Flood	90
			Asymmetric	07

Power supply options (remote only. DMX control required/by others)
OT96-D010*

Osram, 96W, 24VDC,
120-277VAC, supplied
in a Dry location
enclosure. *Must be
wired as non-dim.

OT96-JBX

Osram, 96W, 24VDC,
120-277VAC, supplied
in a Dry location
enclosure.

In-grade Outer casings

14.17 in	E99761
24.4 in	E99762
36.2 in	E99763
48 in	E99764
59.8 in	E99765


End caps(pair)

One pair required per in-grade run
E99766




Ceiling or wall recessed
installation spring
E99818


Cables

E99216 59 in. low volt. power feed cable F 4 pin M12	E89190 196 in. low volt. power feed cable F 4 pin M12	E98437 39 in. low volt. power extension cable M+F 4 pin M12	E98149 196 in. low volt. power extension cable M+F 4 pin M12	E89188 393 in. low volt. power extension cable M+F 4 pin M12	E89189 196 in. DMX cable M 5 pin M12
E89186 196.9 in DMX cable M 5 pin M12 + M 3 pin XLR	E98494 196.9 in DMX cable M 5 pin M12 + F 3 pin XLR	E98493 196.9 in DMX cable M 5 pin M12 + M 5 pin XLR	E98994 39.4 in DMX extension M+F 5 pin M12	E98993 196.9 in DMX extension M+F 5 pin M12	E89187 393.7 in DMX extension M+F 5 pin M12

technical
information

Xenia_A PRO | Linear profiles | 120/277V | powerLED | Wet location | Integral Driver | Drive over | 7.7W/ft


8.3W

Anod. Al. On/Off **E81465***

*120V ONLY


2700K	764 lm	M
3000K	801 lm	W
3500K	801 lm	T
4000K	838 lm	N

Narrow Spot	08
Narrow Flood	20
Flood	50
Wide Flood	90
Elliptic	25
Asymmetric	07

16.5W

Anod. Al. On/Off **E81466***


*120V ONLY



2700K	1528 lm	M
3000K	1602 lm	W
3500K	1602 lm	T
4000K	1676 lm	N

Narrow Spot	08
Narrow Flood	20
Flood	50
Wide Flood	90
Elliptic	25
Asymmetric	07


26.2W

Anod. Al. On/Off **E81467**Anod. Al. 0-10V **E81683**

2700K	2292 lm	M
3000K	2403 lm	W
3500K	2403 lm	T
4000K	2514 lm	N

Narrow Spot	08
Narrow Flood	20
Flood	50
Wide Flood	90
Elliptic	25
Asymmetric	07


35.4W

Anod. Al. On/Off **E81468**Anod. Al. 0-10V **E81684**

2700K	3056 lm	M
3000K	3204 lm	W
3500K	3204 lm	T
4000K	3352 lm	N

Narrow Spot	08
Narrow Flood	20
Flood	50
Wide Flood	90
Elliptic	25
Asymmetric	07


44W DC

Anod. Al. On/Off **E81624**Anod. Al. 0-10V **E81685**


2700K	3820 lm	M
3000K	4005 lm	W
3500K	4005 lm	T
4000K	4190 lm	N

Narrow Spot	08
Narrow Flood	20
Flood	50
Wide Flood	90
Elliptic	25
Asymmetric	07

On/Off



0-10V


 technical
information

In-grade outer casings

14.17 in	E99761
24.4 in	E99762
36.2 in	E99763
48 in	E99764
59.8 in	E99765

End cap (pair)

One pair required per in-grade run

E99766Ceiling-or wall recessed
installation spring**E99818**
Cables
E8304359 in. line volt.
power feed cable
F 3 pin M12**E83044**196 in. line volt.
power feed cable
F 3 pin M12**E83045**59 in. line volt.
power extension
cable
M+F 3 pin M12**E83046**196 in. line volt.
power extension
cable
M+F 3 pin M12**E83047**393 in. line volt.
power extension
cable
M+F 3 pin M12**E89189**196 in
0-10V cable
M 5 pin M12**E98994**39 in
0-10V extension
M+F 5 pin
M12**E98993**196 in
0-10V extension
M+F 5 pin
M12**E89187**393 in
0-10V extension
M+F 5 pin
M12
M41


inter-lux.com

MAESTRO 2.2

Xenia_A PRO RGBW DMX | Linear profiles | 120V-ONLY + Integral DMX interface | powerLED | Wet location | Integral Driver | Drive over



RGBW




8.5W

Anod. AL	E81941	RGBW natural white	Q	Elliptic	25
		RGBW warm white	V		

22.6W

Anod. AL	E81942	RGBW natural white	Q	Elliptic	25
		RGBW warm white	V		



In-grade outer casings

20.9 in **E99820**

46.1 in **E99821**



End cap (pair)
One pair required per in-grade run
E99766



Ceiling-mounted recessed
installation spring
E99818



Cables

E83043 59 in. line volt. power feed cable F 3 pin M12	E83044 196 in. line volt. power feed cable F 3 pin M12	E83045 59 in. line volt. power extension cable M+F 3 pin M12	E83046 196 in. line volt. power extension cable M+F 3 pin M12	E83047 393 in. line volt. power extension cable M+F 3 pin M12	E89189 196.9 in DMX cable M 5 pin M12
E89186 196.9 in DMX cable M 5 pin M12 + M 3 pin XLR	E98494 196.9 in DMX cable M 5 pin M12 + F 3 pin XLR	E98493 196.9 in DMX cable M 5 pin M12 + M 5 pin XLR	E98994 39.4 in DMX extension M+F 5 pin M12	E98993 196.9 in DMX extension M+F 5 pin M12	E89187 393.7 in DMX extension M+F 5 pin M12

technical
information