

# xenia




The new Xenia family comprises a very wide range of linear lights, with numerous configurations for every lighting need. They provide a high-performance solution for lighting professionals, offering reliable safety technology including OVP, ESD, TCS® and AcquaStop®. There is also a wide choice of topLED and powerLED outputs, and optics. The range is available in warm white, natural white, and RGBW versions.

## **Materials**

Anodized 6060 aluminum alloy body



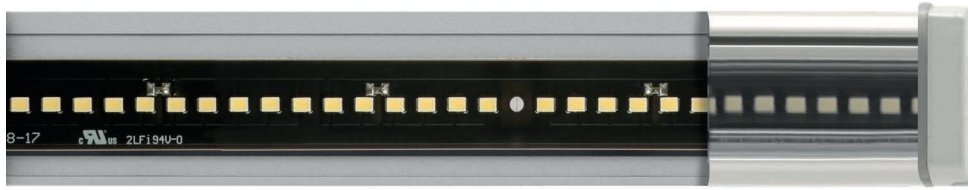









**Xenia\_W  
TopLED 24V**



**Xenia\_W  
PowerLED 24V**



**Xenia\_W PRO  
PowerLED 24V**


|                        | <b>_W</b><br> | <b>_W Pro</b><br> | <b>_A</b><br> | <b>_A Pro</b><br> |
|------------------------|--|--|--|--|
| <b>length</b>          | 14.4 -> 60.2 in  | 14.4 -> 60.2 in  | 14.1 -> 59.8 in  | 14.1 -> 59.8 in  |
| <b>topLED</b>          | 2700K - 3000K<br>3500K - 4000K<br>RGBW+W - RGBW+N  | -  | 2700K - 3000K<br>3500K - 4000K<br>RGBW+W - RGBW+N  |  |
| <b>powerLED</b>        | -  | 2700K - 3000K<br>3500K - 4000K<br>RGBW+W - RGBW+N  |  | 2700K - 3000K<br>3500K - 4000K<br>RGBW+W - RGBW+N  |
| <b>Optics</b>          | Narrow Flood - Flood<br>Wide Flood - Asymmetric<br>General                                       | Narrow Spot - Narrow Flood<br>Flood - Wide Flood<br>Asymmetric - Elliptical                          | Narrow Flood - Flood<br>Wide Flood - Asymmetric<br>General   | Narrow Spot - Spot<br>Narrow Flood - Flood<br>Wide Flood - Asymmetric<br>General - Wall Grazing        |
| <b>Finish</b>          |               |                   |               |                   |
| <b>Driver remote</b>   | 0-10V<br>DMX (RGBW)  | 0-10 V<br>DMX (RGBW)   | 0-10V<br>DMX (RGBW)  | 0-10 V<br>DMX (RGBW)   |
| <b>Integral Driver</b> | On/Off   | On/Off<br>0-10V  | DMX  | DMX  |
| <b>Mounting</b>        | Surface mounted with brackets  | Surface mounted with brackets  | In-grade / Ceiling or wall recessed  | In-grade / Ceiling or wall recessed  |

## High-quality construction

Xenia is made from very high-quality materials and components. Because of the way in which they are manufactured, these lights are able to maintain their performance in temperatures ranging from a glacial -4°F to a sultry +140°C. They are also highly corrosion resistant, thanks to their use of 6060 aluminum alloy and 10-micron anodization.


## Safety systems

We have developed a variety of corrosion protection technology to maximize the lifespan of our lights. They also have overtension and electrical discharge protection, TCS® to protect their circuits from moisture.

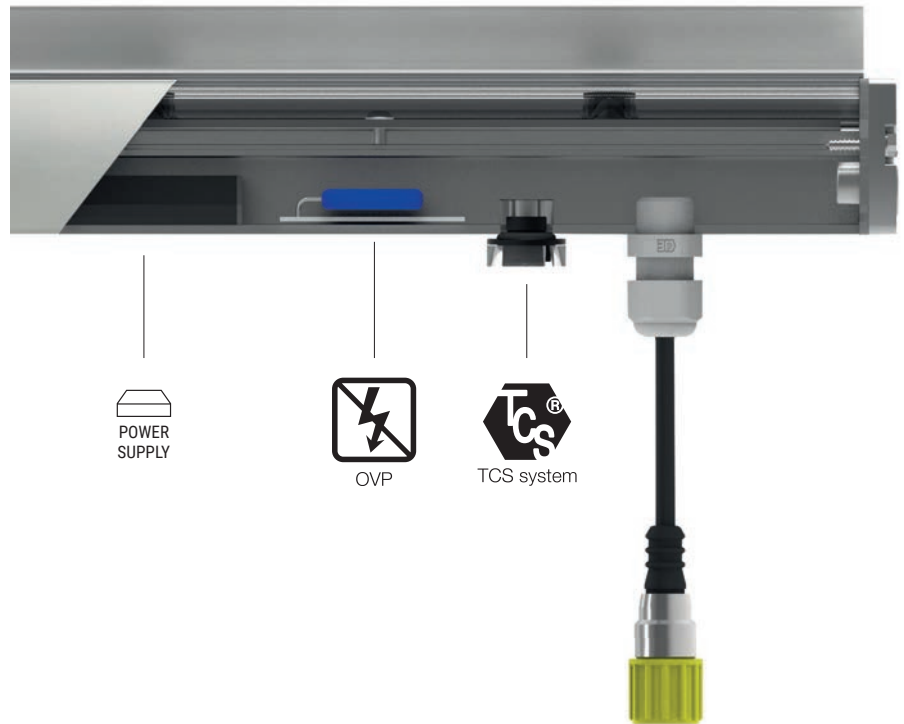

## Wall-mounted versions

- Multiple fixing sizes for grazing installations
- Graduated body rotation
- Antiglare shade
- Five sizes, from 14.2 to 59.1 inch
- Optics: flood, Narrow Flood, wide flood, asymmetric, general





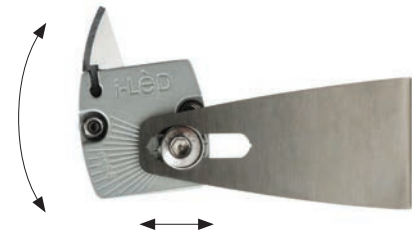


## Recessed versions

- Extra-thin housing: frame only 0.12 inch thick
- Individual fixtures don't have end caps, allowing multiple lights to be installed back to back to create a continuous run.
- End caps can then be placed at the end of the run and adapted to the housing so that the whole body of the luminaire is enclosed.
- Anti-glare shade (darklight)
- Five lengths available, from nominal 14" to 60"
- Variety of optics: from narrow spot to wide flood, asymmetric, and general illumination



Xenia\_W | Linear profiles | 24V | topLED | Wet location | Driver remote



6.5W

|           |               |              |          |              |           |
|-----------|---------------|--------------|----------|--------------|-----------|
| Anod. Al. | <b>E93786</b> | 2700K 764 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |               | 3000K 801 lm | <b>W</b> | Flood        | <b>50</b> |
|           |               | 3500K 801 lm | <b>T</b> | Wide Flood   | <b>90</b> |
|           |               | 4000K 838 lm | <b>N</b> | Asymmetric   | <b>07</b> |
|           |               |              |          | General      | <b>00</b> |

13W

|           |               |               |          |              |           |
|-----------|---------------|---------------|----------|--------------|-----------|
| Anod. Al. | <b>E93825</b> | 2700K 1528 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |               | 3000K 1602 lm | <b>W</b> | Flood        | <b>50</b> |
|           |               | 3500K 1602 lm | <b>T</b> | Wide Flood   | <b>90</b> |
|           |               | 4000K 1676 lm | <b>N</b> | Asymmetric   | <b>07</b> |
|           |               |               |          | General      | <b>00</b> |

20W

|           |               |               |          |              |           |
|-----------|---------------|---------------|----------|--------------|-----------|
| Anod. Al. | <b>E93828</b> | 2700K 2292 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |               | 3000K 2403 lm | <b>W</b> | Flood        | <b>50</b> |
|           |               | 3500K 2403 lm | <b>T</b> | Wide Flood   | <b>90</b> |
|           |               | 4000K 2514 lm | <b>N</b> | Asymmetric   | <b>07</b> |
|           |               |               |          | General      | <b>00</b> |

26W

|           |               |               |          |              |           |
|-----------|---------------|---------------|----------|--------------|-----------|
| Anod. Al. | <b>E93829</b> | 2700K 3056 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |               | 3000K 3204 lm | <b>W</b> | Flood        | <b>50</b> |
|           |               | 3500K 3204 lm | <b>T</b> | Wide Flood   | <b>90</b> |
|           |               | 4000K 3352 lm | <b>N</b> | Asymmetric   | <b>07</b> |
|           |               |               |          | General      | <b>00</b> |

33W

|           |               |               |          |              |           |
|-----------|---------------|---------------|----------|--------------|-----------|
| Anod. Al. | <b>E81696</b> | 2700K 3820 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |               | 3000K 4005 lm | <b>W</b> | Flood        | <b>50</b> |
|           |               | 3500K 4005 lm | <b>T</b> | Wide Flood   | <b>90</b> |
|           |               | 4000K 4190 lm | <b>N</b> | Asymmetric   | <b>07</b> |
|           |               |               |          | General      | <b>00</b> |

Steel fixing brackets



|            |               |
|------------|---------------|
| 1.8-2.6 in | <b>E98949</b> |
| 3.5 in     | <b>E89045</b> |
| 5.9 in     | <b>E89046</b> |
| 11.8 in    | <b>E89047</b> |

Anti-glaring accessory



|         |               |
|---------|---------------|
| 14.4 in | <b>E98782</b> |
| 24.8 in | <b>E98783</b> |
| 36.6 in | <b>E98784</b> |
| 48.4 in | <b>E98785</b> |
| 60.2 in | <b>E99778</b> |

Power supply options (remote only)


**OT96-D010**

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

**OT96-JBX**


Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Xenia\_W ON/OFF | Linear profiles | 120V-ONLY | topLED | Wet location | Integral Driver




7.2W

|           |        |               |       |        |          |              |           |
|-----------|--------|---------------|-------|--------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E93688</b> | 2700K | 764 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3000K | 801 lm | <b>W</b> | Medium Flood | <b>50</b> |
|           |        |               | 3500K | 801 lm | <b>T</b> | Flood        | <b>90</b> |
|           |        |               | 4000K | 838 lm | <b>N</b> | Asymmetric   | <b>07</b> |
|           |        |               |       |        |          | General      | <b>00</b> |




14.3W

|           |        |               |       |         |          |              |           |
|-----------|--------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E93689</b> | 2700K | 1528 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3000K | 1602 lm | <b>W</b> | Medium Flood | <b>50</b> |
|           |        |               | 3500K | 1602 lm | <b>T</b> | Flood        | <b>90</b> |
|           |        |               | 4000K | 1676 lm | <b>N</b> | Asymmetric   | <b>07</b> |
|           |        |               |       |         |          | General      | <b>00</b> |




20W

|           |        |               |       |         |          |              |           |
|-----------|--------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E94020</b> | 2700K | 2292 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3000K | 2403 lm | <b>W</b> | Medium Flood | <b>50</b> |
|           |        |               | 3500K | 2403 lm | <b>T</b> | Flood        | <b>90</b> |
|           |        |               | 4000K | 2514 lm | <b>N</b> | Asymmetric   | <b>07</b> |
|           |        |               |       |         |          | General      | <b>00</b> |



28.6W

|           |        |               |       |         |          |              |           |
|-----------|--------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E94023</b> | 2700K | 3056 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3000K | 3204 lm | <b>W</b> | Medium Flood | <b>50</b> |
|           |        |               | 3500K | 3204 lm | <b>T</b> | Flood        | <b>90</b> |
|           |        |               | 4000K | 3352 lm | <b>N</b> | Asymmetric   | <b>07</b> |
|           |        |               |       |         |          | General      | <b>00</b> |



33W

|           |        |               |       |         |          |              |           |
|-----------|--------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E81695</b> | 2700K | 3820 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3000K | 4005 lm | <b>W</b> | Medium Flood | <b>50</b> |
|           |        |               | 3500K | 4005 lm | <b>T</b> | Flood        | <b>90</b> |
|           |        |               | 4000K | 4190 lm | <b>N</b> | Asymmetric   | <b>07</b> |
|           |        |               |       |         |          | General      | <b>00</b> |

Steel fixing brackets



|            |               |
|------------|---------------|
| 1.8-2.6 in | <b>E98949</b> |
| 3.5 in     | <b>E89045</b> |
| 5.9 in     | <b>E89046</b> |
| 11.8 in    | <b>E89047</b> |

Anti-glaring accessory



|         |               |
|---------|---------------|
| 14.4 in | <b>E98782</b> |
| 24.8 in | <b>E98783</b> |
| 36.6 in | <b>E98784</b> |
| 48.4 in | <b>E98785</b> |
| 60.2 in | <b>E99778</b> |



Cables

|                                    |                                     |   |  |  |
|------------------------------------|-------------------------------------|---|--|--|
| <b>E99216</b>                      | <b>E89190</b>                       | <b>E98437</b>   | <b>E98149</b>  | <b>E89188</b>  |
| 59.1 in power cable<br>F 4 pin M12 | 196.9 in power cable<br>F 4 pin M12 | 39.4 in<br>Extension for power cable<br>M+F 4 pin M12 | 196.9 in<br>Extension for power cable<br>M+F 4 pin M12 | 393.7 in<br>Extension for power cable<br>M+F 4 pin M12 |

**Xenia\_W RGB DMX | Linear profiles | 24V | topLED | Wet location | Driver remote**



RGBW



**13W**

|           |               |                    |          |              |           |
|-----------|---------------|--------------------|----------|--------------|-----------|
| Anod. Al. | <b>E94054</b> | RGBW natural white | <b>Q</b> | Narrow Flood | <b>20</b> |
|           |               | RGBW warm white    | <b>V</b> | Flood        | <b>50</b> |
|           |               |                    |          | Wide Flood   | <b>90</b> |
|           |               |                    |          | Asymmetric   | <b>07</b> |
|           |               |                    |          | General      | <b>00</b> |

**24W**

|           |               |                    |          |              |           |
|-----------|---------------|--------------------|----------|--------------|-----------|
| Anod. Al. | <b>E94057</b> | RGBW natural white | <b>Q</b> | Narrow Flood | <b>20</b> |
|           |               | RGBW warm white    | <b>V</b> | Flood        | <b>50</b> |
|           |               |                    |          | Wide Flood   | <b>90</b> |
|           |               |                    |          | Asymmetric   | <b>07</b> |
|           |               |                    |          | General      | <b>00</b> |

**Power supply options (remote only. DMX control required/by others)**





**OT96-D010\***

Osram, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure. \*Must be wired as non-dim.



**OT96-JBX**

Osram, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure.

**Steel fixing brackets**

|   |            |               |
|---|------------|---------------|
|  | 1.8-2.6 in | <b>E98949</b> |
|  | 3.5 in     | <b>E89045</b> |
|  | 5.9 in     | <b>E89046</b> |
|  | 11.8 in    | <b>E89047</b> |


**Anti-glaring accessory**

|   |         |               |
|---|---------|---------------|
|  | 19.7 in | <b>E98953</b> |
|  | 46.5 in | <b>E98952</b> |

**Cables**

|   |   |   |  |  |                                      |
|---|---|---|--|--|--------------------------------------|
| <b>E99216</b>                                   | <b>E89190</b>                                   | <b>E98437</b>   | <b>E98149</b>  | <b>E89188</b>  | <b>E89189</b>                        |
| 59.1 in power cable<br>F 4 pin M12              | 196.9 in power cable<br>F 4 pin M12             | 39.4 in<br>Extension for power cable<br>M+F 4 pin M12 | 196.9 in<br>Extension for power cable<br>M+F 4 pin M12 | 393.7 in<br>Extension for power cable<br>M+F 4 pin M12 | 196.9 in DMX cable<br>M 5 pin M12    |
| <b>E89186</b>                                   | <b>E98494</b>                                   | <b>E98493</b>   | <b>E98994</b>  | <b>E98993</b>  | <b>E89187</b>                        |
| 196.9 in DMX cable<br>M 5 pin M12 + M 3 pin XLR | 196.9 in DMX cable<br>M 5 pin M12 + F 3 pin XLR | 196.9 in DMX cable<br>M 5 pin M12 + M 5 pin XLR       | 39.4 in DMX extension M+F 5 pin M12                    | 196.9 in DMX extension M+F 5 pin M12                   | 393.7 in DMX extension M+F 5 pin M12 |

Xenia\_W | Linear profiles | powerLED | 630mA | Wet location | Driver remote



6W

| Anod. Al. | E93690 | 2700K | 703 lm | M | Narrow Flood | 20 |
|-----------|--------|-------|--------|---|--------------|----|
| 3 LEDs    |        | 3000K | 703 lm | W | Flood        | 50 |
|           |        | 3500K | 703 lm | T | Wide Flood   | 90 |
|           |        | 4000K | 749 lm | N | Elliptic     | 25 |
|           |        |       |        |   | Asymmetric   | 07 |

Power supply options (remote only)

| ECO30W-630  | SOLO50W-630  | SOLO100W-630  |
|---|--|---|
| 0-10V EldoLED<br>ECOdrive 30W<br>for 1-3 fixtures | 0-10V EldoLED<br>SOLOdrive 50W<br>for 1-6 fixtures | 0-10V EldoLED<br>SOLOdrive<br>100W for 1-12<br>fixtures |

12W

| Anod. Al. | E93691 | 2700K | 1406 lm | M | Narrow Flood | 20 |
|-----------|--------|-------|---------|---|--------------|----|
| 6 LEDs    |        | 3000K | 1406 lm | W | Flood        | 50 |
|           |        | 3500K | 1406 lm | T | Wide Flood   | 90 |
|           |        | 4000K | 1498 lm | N | Elliptic     | 25 |
|           |        |       |         |   | Asymmetric   | 07 |

Power supply options (remote only)

| ECO30W-630  | SOLO50W-630  | SOLO100W-630   |
|---|--|--|
| 0-10V EldoLED<br>ECOdrive 30W<br>for 1-2 fixtures | 0-10V EldoLED<br>SOLOdrive 50W<br>for 1-2 fixtures | 0-10V EldoLED<br>SOLOdrive<br>100W for 1-4<br>fixtures |

18W

| Anod. Al. | E93755 | 2700K | 2109 lm | M | Narrow Flood | 20 |
|-----------|--------|-------|---------|---|--------------|----|
| 9 LEDs    |        | 3000K | 2109 lm | W | Flood        | 50 |
|           |        | 3500K | 2109 lm | T | Wide Flood   | 90 |
|           |        | 4000K | 2247 lm | N | Elliptic     | 25 |
|           |        |       |         |   | Asymmetric   | 07 |

Power supply options (remote only)




| ECO30W-630                                     | SOLO50W-630  | SOLO100W-630   |
|--|--|--|
| 0-10V EldoLED<br>ECOdrive 30W<br>for 1 fixture | 0-10V EldoLED<br>SOLOdrive 50W<br>for 1-2 fixtures | 0-10V EldoLED<br>SOLOdrive<br>100W for 1-4<br>fixtures |

24W


| Anod. Al. | E93785 | 2700K | 2812 lm | M | Narrow Flood | 20 |
|-----------|--------|-------|---------|---|--------------|----|
| 12 LEDs   |        | 3000K | 2812 lm | W | Flood        | 50 |
|           |        | 3500K | 2812 lm | T | Wide Flood   | 90 |
|           |        | 4000K | 2996 lm | N | Elliptic     | 25 |
|           |        |       |         |   | Asymmetric   | 07 |

Power supply options (remote only)


| SOLO50W-630                                  | SOLO100W-630                                     |
|--|--|
| 0-10V EldoLED SOLOdrive<br>50W for 1 fixture | 0-10V EldoLED SOLOdrive<br>100W for 1-3 fixtures |



Steel fixing brackets

|   |            |               |
|---|------------|---------------|
|  | 1.8-2.6 in | <b>E98949</b> |
|   | 3.5 in     | <b>E89045</b> |
|   | 5.9 in     | <b>E89046</b> |
|   | 11.8 in    | <b>E89047</b> |






Anti-glaring accessory

|   |         |               |
|---|---------|---------------|
|  | 14.4 in | <b>E98782</b> |
|   | 24.8 in | <b>E98783</b> |
|   | 36.6 in | <b>E98784</b> |
|   | 48.4 in | <b>E98785</b> |





**Xenia\_W PRO | Linear profiles | 120V-ONLY | powerLED | Wet location | Integral Driver**



**9W**

|           |        |               |       |         |          |              |           |
|-----------|--------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E81702</b> | 2700K | 956 lm  | <b>M</b> | Narrow Spot  | <b>08</b> |
|           |        |               | 3000K | 1025 lm | <b>W</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3500K | 1025 lm | <b>T</b> | Flood        | <b>50</b> |
|           |        |               | 4000K | 1164 lm | <b>N</b> | Wide Flood   | <b>90</b> |
|           |        |               |       |         |          | Elliptic     | <b>25</b> |
|           |        |               |       |         |          | Asymmetric   | <b>07</b> |

**17.1W**

|           |        |               |       |         |          |              |           |
|-----------|--------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E81703</b> | 2700K | 1835 lm | <b>M</b> | Narrow Spot  | <b>08</b> |
|           |        |               | 3000K | 1964 lm | <b>W</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3500K | 1964 lm | <b>T</b> | Flood        | <b>50</b> |
|           |        |               | 4000K | 2238 lm | <b>N</b> | Wide Flood   | <b>90</b> |
|           |        |               |       |         |          | Elliptic     | <b>25</b> |
|           |        |               |       |         |          | Asymmetric   | <b>07</b> |

**26.2W**

|           |        |               |       |         |          |              |           |
|-----------|--------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E81704</b> | 2700K | 2753 lm | <b>M</b> | Narrow Spot  | <b>08</b> |
| Anod. Al. | 0-10V* | <b>E81709</b> | 3000K | 2946 lm | <b>W</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3500K | 2946 lm | <b>T</b> | Flood        | <b>50</b> |
|           |        |               | 4000K | 3357 lm | <b>N</b> | Wide Flood   | <b>90</b> |
|           |        |               |       |         |          | Elliptic     | <b>25</b> |
|           |        |               |       |         |          | Asymmetric   | <b>07</b> |



**35.4W**

|           |        |               |       |         |          |              |           |
|-----------|--------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E81705</b> | 2700K | 3671 lm | <b>M</b> | Narrow Spot  | <b>08</b> |
| Anod. Al. | 0-10V* | <b>E81710</b> | 3000K | 3928 lm | <b>W</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3500K | 3928 lm | <b>T</b> | Flood        | <b>50</b> |
|           |        |               | 4000K | 4476 lm | <b>N</b> | Wide Flood   | <b>90</b> |
|           |        |               |       |         |          | Elliptic     | <b>25</b> |
|           |        |               |       |         |          | Asymmetric   | <b>07</b> |


**44W**

|           |        |               |       |         |          |              |           |
|-----------|--------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E81706</b> | 2700K | 4588 lm | <b>M</b> | Narrow Spot  | <b>08</b> |
| Anod. Al. | 0-10V* | <b>E81711</b> | 3000K | 4910 lm | <b>W</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3500K | 4910 lm | <b>T</b> | Flood        | <b>50</b> |
|           |        |               | 4000K | 5594 lm | <b>N</b> | Wide Flood   | <b>90</b> |
|           |        |               |       |         |          | Elliptic     | <b>25</b> |
|           |        |               |       |         |          | Asymmetric   | <b>07</b> |


\*NOTE: 0-10V models are 120/277V



**Steel fixing brackets**

|   |            |               |
|---|------------|---------------|
|  | 1.8-2.6 in | <b>E98949</b> |
|   | 3.5 in     | <b>E89045</b> |
|   | 5.9 in     | <b>E89046</b> |
|   | 11.8 in    | <b>E89047</b> |



**Anti-glaring accessory**

|   |         |               |
|---|---------|---------------|
|  | 14.4 in | <b>E98782</b> |
|   | 24.8 in | <b>E98783</b> |
|   | 36.6 in | <b>E98784</b> |
|   | 48.4 in | <b>E98785</b> |
|   | 60.2 in | <b>E99778</b> |

**Cables**

|  |   |  |   |   |
|--|---|--|---|---|
| <b>E99216</b><br>59.1 in power cable<br>F 4 pin M12  | <b>E89190</b><br>196.9 in power cable<br>F 4 pin M12      | <b>E98437</b><br>39.4 in<br>Extension for power cable<br>M+F 4 pin M12 | <b>E98149</b><br>196.9 in<br>Extension for power cable<br>M+F 4 pin M12 | <b>E89188</b><br>393.7 in<br>Extension for power cable<br>M+F 4 pin M12 |
| <b>E89189</b><br>196.9 in 0-10V cable<br>M 5 pin M12 | <b>E98994</b><br>39.4 in 0-10V extension<br>M+F 5 pin M12 | <b>E98993</b><br>196.9 in 0-10V extension<br>M+F 5 pin M12             | <b>E89187</b><br>393.7 in 0-10V extension<br>M+F 5 pin M12              |   |

**Xenia\_W Pro RGB DMX | Linear profiles | 120-ONLY | powerLED | Wet location**



7.3 W

|          |                   |                    |          |          |           |
|----------|-------------------|--------------------|----------|----------|-----------|
| Anod. AL | <b>E93606</b>     | RGBW natural white | <b>Q</b> | Elliptic | <b>25</b> |
|          | <b>3 x 4 LEDs</b> | RGBW warm white    | <b>V</b> |          |           |

19.3 W

|          |                   |                 |          |          |           |
|----------|-------------------|-----------------|----------|----------|-----------|
| Anod. AL | <b>E93607</b>     | RGB             | <b>Q</b> | Elliptic | <b>25</b> |
|          | <b>8 x 4 LEDs</b> | RGBW warm white | <b>V</b> |          |           |

**Steel fixing brackets**



|            |               |
|------------|---------------|
| 1.8-2.6 in | <b>E98949</b> |
| 3.5 in     | <b>E89045</b> |
| 5.9 in     | <b>E89046</b> |
| 11.8 in    | <b>E89047</b> |

**Anti-glaring accessory**




|         |               |
|---------|---------------|
| 19.7 in | <b>E98951</b> |
| 46.5 in | <b>E98952</b> |

**Cables**

|  |  |   |  |  |  |
|--|--|---|--|--|--|
| <b>E99216</b><br>59.1 in power cable<br>F 4 pin M12              | <b>E89190</b><br>196.9 in power cable<br>F 4 pin M12             | <b>E98437</b><br>39.4 in Extension for power cable<br>M+F 4 pin M12 | <b>E98149</b><br>196.9 in Extension for power cable<br>M+F 4 pin M12 | <b>E89188</b><br>393.7 in Extension for power cable<br>M+F 4 pin M12 | <b>E89189</b><br>196.9 in DMX cable<br>M 5 pin M12   |
| <b>E89186</b><br>196.9 in DMX cable<br>M 5 pin M12 + M 3 pin XLR | <b>E98494</b><br>196.9 in DMX cable<br>M 5 pin M12 + F 3 pin XLR | <b>E98493</b><br>196.9 in DMX cable<br>M 5 pin M12 + M 5 pin XLR    | <b>E98994</b><br>39.4 in DMX extension 0-10V<br>M+F                  | <b>E98993</b><br>196.9 in DMX extension 0-10V<br>M+F                 | <b>E89187</b><br>393.7 in DMX extension 0-10V<br>M+F |




**Xenia\_A | Linear profiles | 24V | topLED | Wet location | Driver remote | Drive over | 6.1W/ft**




**6.5W**

|           |               |       |        |          |              |           |
|-----------|---------------|-------|--------|----------|--------------|-----------|
| Anod. Al. | <b>E81453</b> | 2700K | 764 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |               | 3000K | 801 lm | <b>W</b> | Flood        | <b>50</b> |
|           |               | 3500K | 801 lm | <b>T</b> | Wide Flood   | <b>90</b> |
|           |               | 4000K | 838 lm | <b>N</b> | Asymmetric   | <b>07</b> |




**13W**

|           |               |       |         |          |              |           |
|-----------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | <b>E81454</b> | 2700K | 1528 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |               | 3000K | 1602 lm | <b>W</b> | Flood        | <b>50</b> |
|           |               | 3500K | 1602 lm | <b>T</b> | Wide Flood   | <b>90</b> |
|           |               | 4000K | 1676 lm | <b>N</b> | Asymmetric   | <b>07</b> |




**19.5W**

|           |               |       |         |          |              |           |
|-----------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | <b>E81455</b> | 2700K | 2292 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |               | 3000K | 2403 lm | <b>W</b> | Flood        | <b>50</b> |
|           |               | 3500K | 2403 lm | <b>T</b> | Wide Flood   | <b>90</b> |
|           |               | 4000K | 2514 lm | <b>N</b> | Asymmetric   | <b>07</b> |



**26W**


|           |               |       |         |          |              |           |
|-----------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | <b>E81456</b> | 2700K | 3056 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |               | 3000K | 3204 lm | <b>W</b> | Flood        | <b>50</b> |
|           |               | 3500K | 3204 lm | <b>T</b> | Wide Flood   | <b>90</b> |
|           |               | 4000K | 3352 lm | <b>N</b> | Asymmetric   | <b>07</b> |



**32.5W**



|           |               |       |         |          |              |           |
|-----------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | <b>E81621</b> | 2700K | 3820 lm | <b>M</b> | Narrow Flood | <b>20</b> |
|           |               | 3000K | 4005 lm | <b>W</b> | Flood        | <b>50</b> |
|           |               | 3500K | 4005 lm | <b>T</b> | Wide Flood   | <b>90</b> |
|           |               | 4000K | 4190 lm | <b>N</b> | Asymmetric   | <b>07</b> |

**In-grade outer casings**

|   |          |               |
|---|----------|---------------|
|  | 14.17 in | <b>E99761</b> |
|   | 24.4 in  | <b>E99762</b> |
|   | 36.2 in  | <b>E99763</b> |
|   | 48 in    | <b>E99764</b> |
|   | 59.8 in  | <b>E99765</b> |

**End caps(pair)**

One pair required per in-grade run

|   |               |
|---|---------------|
|  | <b>E99766</b> |
|  | <b>E99818</b> |

Ceiling or wall recessed installation spring



**Cables**

|                                    |                                     |   |  |  |
|------------------------------------|-------------------------------------|---|--|--|
| <b>E99216</b>                      | <b>E89190</b>                       | <b>E98437</b>   | <b>E98149</b>  | <b>E89188</b>  |
| 59.1 in power cable<br>F 4 pin M12 | 196.9 in power cable<br>F 4 pin M12 | 39.4 in<br>Extension for power cable<br>M+F 4 pin M12 | 196.9 in<br>Extension for power cable<br>M+F 4 pin M12 | 393.7 in<br>Extension for power cable<br>M+F 4 pin M12 |

**Power supply options (remote only)**

|  |  |
|--|--|
| <b>OT96-D010</b>   | <b>OT96-JBX</b>                                      |
| Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure | Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location |

**Xenia\_A RGBW DMX | Linear profiles | 120V | topLED\_ONLY | Wet location | Integral Driver | Drive over**





**13W**

|                         |                    |          |              |           |
|-------------------------|--------------------|----------|--------------|-----------|
| Anod. Al. <b>E81939</b> | RGBW natural white | <b>Q</b> | Narrow Flood | <b>20</b> |
|                         | RGBW warm white    | <b>V</b> | Flood        | <b>50</b> |
|                         |                    |          | Wide Flood   | <b>90</b> |
|                         |                    |          | Asymmetric   | <b>07</b> |

**24W**

|                         |                    |          |              |           |
|-------------------------|--------------------|----------|--------------|-----------|
| Anod. Al. <b>E81940</b> | RGBW natural white | <b>Q</b> | Narrow Flood | <b>20</b> |
|                         | RGBW warm white    | <b>V</b> | Flood        | <b>50</b> |
|                         |                    |          | Wide Flood   | <b>90</b> |
|                         |                    |          | Asymmetric   | <b>07</b> |

**Xenia\_A RGBW DMX | Linear profiles | 24V | topLED | Wet location | Driver remote | Drive over**



**12W**

|                         |                    |          |              |           |
|-------------------------|--------------------|----------|--------------|-----------|
| Anod. Al. <b>E81983</b> | RGBW natural white | <b>Q</b> | Narrow Flood | <b>20</b> |
|                         | RGBW warm white    | <b>V</b> | Flood        | <b>50</b> |
|                         |                    |          | Wide Flood   | <b>90</b> |
|                         |                    |          | Asymmetric   | <b>07</b> |

**22W**

|                         |                    |          |              |           |
|-------------------------|--------------------|----------|--------------|-----------|
| Anod. Al. <b>E81984</b> | RGBW natural white | <b>Q</b> | Narrow Flood | <b>20</b> |
|                         | RGBW warm white    | <b>V</b> | Flood        | <b>50</b> |
|                         |                    |          | Wide Flood   | <b>90</b> |
|                         |                    |          | Asymmetric   | <b>07</b> |

**Power supply options (remote only. DMX control required/by others)**


**OT96-D010\***

Osram, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure. \*Must be wired as non-dim.

**OT96-JBX**

Osram, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure.

**In-grade Outer casings**



20.8 in **E99820**

46 in **E99821**

**End caps(pair)**

One pair required per in-grade run **E99766**




Ceiling or wall recessed installation spring **E99818**



**Cables**


|  |  |   |  |  |  |
|--|--|---|--|--|--|
| <b>E99216</b><br>59.1 in power cable<br>F 4 pin M12              | <b>E89190</b><br>196.9 in power cable<br>F 4 pin M12             | <b>E98437</b><br>39.4 in Extension for power cable<br>M+F 4 pin M12 | <b>E98149</b><br>196.9 in Extension for power cable<br>M+F 4 pin M12 | <b>E89188</b><br>393.7 in Extension for power cable<br>M+F 4 pin M12 | <b>E89189</b><br>196.9 in DMX cable<br>M 5 pin M12       |
| <b>E89186</b><br>196.9 in DMX cable<br>M 5 pin M12 + M 3 pin XLR | <b>E98494</b><br>196.9 in DMX cable<br>M 5 pin M12 + F 3 pin XLR | <b>E98493</b><br>196.9 in DMX cable<br>M 5 pin M12 + M 5 pin XLR    | <b>E98994</b><br>39.4 in DMX extension M+F<br>5 pin M12              | <b>E98993</b><br>196.9 in DMX extension M+F<br>5 pin M12             | <b>E89187</b><br>393.7 in DMX extension M+F<br>5 pin M12 |

**Xenia\_A PRO | Linear profiles | 120V-ONLY | powerLED | Wet location | Integral Driver | Drive over | 7.7W/ft**




**8.1W**

|           |        |               |       |        |          |              |           |
|-----------|--------|---------------|-------|--------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E81465</b> | 2700K | 764 lm | <b>M</b> | Narrow Spot  | <b>08</b> |
|           |        |               | 3000K | 801 lm | <b>W</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3500K | 801 lm | <b>T</b> | Flood        | <b>50</b> |
|           |        |               | 4000K | 838 lm | <b>N</b> | Wide Flood   | <b>90</b> |
|           |        |               |       |        |          | Elliptic     | <b>25</b> |
|           |        |               |       |        |          | Asymmetric   | <b>07</b> |




**16.2W**

|           |        |               |       |         |          |              |           |
|-----------|--------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E81466</b> | 2700K | 1528 lm | <b>M</b> | Narrow Spot  | <b>08</b> |
|           |        |               | 3000K | 1602 lm | <b>W</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3500K | 1602 lm | <b>T</b> | Flood        | <b>50</b> |
|           |        |               | 4000K | 1676 lm | <b>N</b> | Wide Flood   | <b>90</b> |
|           |        |               |       |         |          | Elliptic     | <b>25</b> |
|           |        |               |       |         |          | Asymmetric   | <b>07</b> |




**23W**

|           |        |               |       |         |          |              |           |
|-----------|--------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E81467</b> | 2700K | 2292 lm | <b>M</b> | Narrow Spot  | <b>08</b> |
| Anod. Al. | 0-10V* | <b>E81683</b> | 3000K | 2403 lm | <b>W</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3500K | 2403 lm | <b>T</b> | Flood        | <b>50</b> |
|           |        |               | 4000K | 2514 lm | <b>N</b> | Wide Flood   | <b>90</b> |
|           |        |               |       |         |          | Elliptic     | <b>25</b> |
|           |        |               |       |         |          | Asymmetric   | <b>07</b> |



**30.6W**



|           |        |               |       |         |          |              |           |
|-----------|--------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E81468</b> | 2700K | 3056 lm | <b>M</b> | Narrow Spot  | <b>08</b> |
| Anod. Al. | 0-10V* | <b>E81684</b> | 3000K | 3204 lm | <b>W</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3500K | 3204 lm | <b>T</b> | Flood        | <b>50</b> |
|           |        |               | 4000K | 3352 lm | <b>N</b> | Wide Flood   | <b>90</b> |
|           |        |               |       |         |          | Elliptic     | <b>25</b> |
|           |        |               |       |         |          | Asymmetric   | <b>07</b> |








**38.3W DC**

|           |        |               |       |         |          |              |           |
|-----------|--------|---------------|-------|---------|----------|--------------|-----------|
| Anod. Al. | On/Off | <b>E81624</b> | 2700K | 3820 lm | <b>M</b> | Narrow Spot  | <b>08</b> |
| Anod. Al. | 0-10V* | <b>E81685</b> | 3000K | 4005 lm | <b>W</b> | Narrow Flood | <b>20</b> |
|           |        |               | 3500K | 4005 lm | <b>T</b> | Flood        | <b>50</b> |
|           |        |               | 4000K | 4190 lm | <b>N</b> | Wide Flood   | <b>90</b> |
|           |        |               |       |         |          | Elliptic     | <b>25</b> |
|           |        |               |       |         |          | Asymmetric   | <b>07</b> |

\*NOTE: 0-10V models are 120/277V




**In-grade outer casings**

|   |          |               |
|---|----------|---------------|
|  | 14.17 in | <b>E99761</b> |
|  | 24.4 in  | <b>E99762</b> |
|  | 36.2 in  | <b>E99763</b> |
|  | 48 in    | <b>E99764</b> |
|  | 59.8 in  | <b>E99765</b> |

**End cap (pair)**

One pair required per in-grade run




**Cables**

|                                    |                                     |   |  |  |
|------------------------------------|-------------------------------------|---|--|--|
| <b>E99216</b>                      | <b>E89190</b>                       | <b>E98437</b>   | <b>E98149</b>  | <b>E89188</b>  |
| 59.1 in power cable<br>F 4 pin M12 | 196.9 in power cable<br>F 4 pin M12 | 39.4 in<br>Extension for power cable<br>M+F 4 pin M12 | 196.9 in<br>Extension for power cable<br>M+F 4 pin M12 | 393.7 in<br>Extension for power cable<br>M+F 4 pin M12 |

Xenia\_A PRO RGBW DMX | Linear profiles | 120V-ONLY | powerLED | Wet location | Integral Driver | Drive over



RGBW




12W

|           |               |                    |          |          |           |
|-----------|---------------|--------------------|----------|----------|-----------|
| Anod. Al. | <b>E81941</b> | RGBW natural white | <b>Q</b> | Elliptic | <b>25</b> |
|           |               | RGBW warm white    | <b>V</b> |          |           |

22W

|           |               |                    |          |          |           |
|-----------|---------------|--------------------|----------|----------|-----------|
| Anod. Al. | <b>E81942</b> | RGBW natural white | <b>Q</b> | Elliptic | <b>25</b> |
|           |               | RGBW warm white    | <b>V</b> |          |           |



In-grade outer casings

20.9 in **E99820**

46.1 in **E99821**



End cap (pair)

One pair required per in-grade run **E99766**



Ceiling-mounted recessed installation spring

**E99818**



Cables

| <b>E99216</b>                                   | <b>E89190</b>                                   | <b>E98437</b>   | <b>E98149</b>  | <b>E89188</b>  | <b>E89189</b>                        |
|---|---|---|--|--|--------------------------------------|
| 59.1 in power cable<br>F 4 pin M12              | 196.9 in power cable<br>F 4 pin M12             | 39.4 in<br>Extension for power cable<br>M+F 4 pin M12 | 196.9 in<br>Extension for power cable<br>M+F 4 pin M12 | 393.7 in<br>Extension for power cable<br>M+F 4 pin M12 | 196.9 in DMX cable<br>M 5 pin M12    |
| <b>E89186</b>                                   | <b>E98494</b>                                   | <b>E98493</b>   | <b>E98994</b>  | <b>E98993</b>  | <b>E89187</b>                        |
| 196.9 in DMX cable<br>M 5 pin M12 + M 3 pin XLR | 196.9 in DMX cable<br>M 5 pin M12 + F 3 pin XLR | 196.9 in DMX cable<br>M 5 pin M12 + M 5 pin XLR       | 39.4 in DMX extension M+F 5 pin M12                    | 196.9 in DMX extension M+F 5 pin M12                   | 393.7 in DMX extension M+F 5 pin M12 |