


## CIRCOLO SELECTION

Housing: Circular aluminum profile, opal acrylic glass diffusor on the inside  
 Design: SATTLER

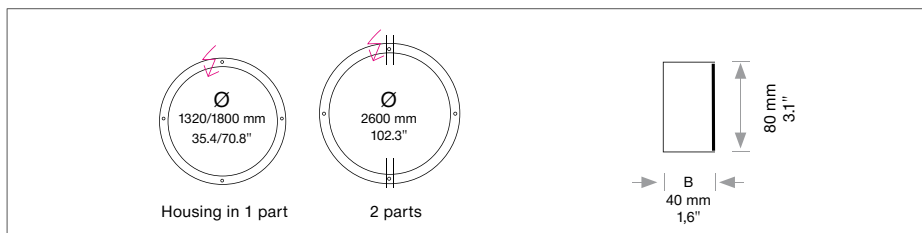

See Power Supply Section for Cable diameter

	Size: Ø mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version												
<b>Sizes</b>	Ø 1320 / 51.9"	H 80 / 3.1" B 40 / 1.6"	62	8.600	18 / 39.7	<b>1082.</b>	x x .	x x . x x .	x x .	x x x .	x												
	Ø 1800 / 70.8"	H 80 / 3.1" B 40 / 1.6"	85	11.800	26 / 57.3	<b>1084.</b>	x x .	x x . x x .	x x .	x x x .	x												
	Ø 2600 / 102.3"	H 80 / 3.1" B 40 / 1.6"	123	17.100	40 / 88.0	<b>1086.</b>	x x .	x x . x x .	x x .	x x x .	x												
<b>LED</b> 24V CRI > 80		<b>Neutral-white</b>	<b>4000 K</b>	Standard	x x x .	<b>40.</b>	x x . x x .	x x .	x x x .	x													
		<b>Warm-white</b>	<b>3000 K</b>	Standard	x x x .	<b>30.</b>	x x . x x .	x x .	x x x .	x													
<b>Dimming</b>		<b>Dimmable 0 - 10 V / 1 - 10 V</b>			Standard	x x x .	x x .	<b>51. 00.</b>	x x .	x x x .	x												
		<b>DMX</b>			(Optional)	x x x .	x x .	<b>31. 00.</b>	x x .	x x x .	x												
<b>Finishes</b>		(Standard) <b>11</b> white	(Optional) <b>30</b> anthracite		x x x .	x x .	x x . x x .	<b>. .</b>	x x x .	x													
		<b>Power Supply Cable</b> Power cable 5/16"Ø		 <b>Z 70</b> Silver		x x x .	x x .	x x . x x .	x x .	<b>Z70.</b>	x												
<b>Mounting Version</b>		Standard Distance of external power supply unit to light fixture <b>max. 10m / 394"</b> 4 point suspension with canopy or canopy in suspended ceiling				x x x .	x x .	x x . x x .	x x .	x x x .	<b>B.</b>												
		Optional Mounting versions with steel cable length 5000 mm / 196" and power supply cable, length 6000 mm / 236" Direct ceiling mounting (white) 50mm / 1.9" with canopy				x x x .	x x .	x x . x x .	x x .	x x x .	<b>H.</b>												
<div style="display: flex; align-items: center;"> <div style="flex: 1;"> <p><b>Dimensions of canopies</b></p> <table border="1"> <thead> <tr> <th>Typ</th> <th>Size mm / inch body / H</th> <th>For use with Mounting Version</th> <th>USA/Canada: Canopy mounts to 4" octagonal junction box.</th> </tr> </thead> <tbody> <tr> <td><b>DBS 250</b></td> <td>Ø 250 / 50 / 9.8 / 1.9"</td> <td><b>B, H</b> (up to Ø 1800 mm)</td> <td></td> </tr> <tr> <td><b>DBS 300</b></td> <td>Ø 300 / 50 / 11.8 / 1.9"</td> <td><b>B, H</b> (Ø 2600 mm)</td> <td></td> </tr> </tbody> </table> </div> <div style="flex: 1; text-align: right;"> </div> </div>												Typ	Size mm / inch body / H	For use with Mounting Version	USA/Canada: Canopy mounts to 4" octagonal junction box.	<b>DBS 250</b>	Ø 250 / 50 / 9.8 / 1.9"	<b>B, H</b> (up to Ø 1800 mm)		<b>DBS 300</b>	Ø 300 / 50 / 11.8 / 1.9"	<b>B, H</b> (Ø 2600 mm)	
Typ	Size mm / inch body / H	For use with Mounting Version	USA/Canada: Canopy mounts to 4" octagonal junction box.																				
<b>DBS 250</b>	Ø 250 / 50 / 9.8 / 1.9"	<b>B, H</b> (up to Ø 1800 mm)																					
<b>DBS 300</b>	Ø 300 / 50 / 11.8 / 1.9"	<b>B, H</b> (Ø 2600 mm)																					
						x x x .	x x .	x x . x x .	x x .	<b>Z70.</b>	x												
<b>Order number</b>																							

Input voltage for all external power supply units and canopies is **120 / 277 VAC 50 / 60 Hz**

1) The stated lumen output of the lights is without considering the acrylic covers or reflectors  
 2) Weight of lights without remote technical unit or canopy

