


FIO

Housing: Solid acrylic rod, with metal frame
Design: SATTLER

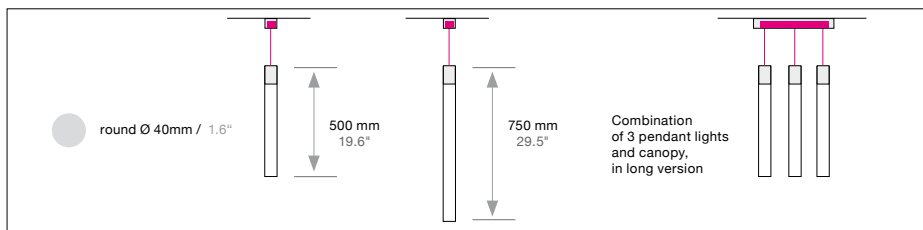

	Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version			
FIO Single	Ø 40, L 500 mm	Ø 2 L 19.6"	4	400	2.0 / 4.4	965.	X X.	X X.	X X.	X X.	X X X.				
	Ø 40, L 750 mm	Ø 2 L 29.5"	4	400	2.5 / 5.5	968.	X X.	X X.	X X.	X X.	X X X.				
FIO Set of 3	Ø 40, L 500 mm	Ø 2 L 19.6"	12	1,200	4.0 / 8.8	966.	X X.	X X.	X X.	X X.	X X X.				
	Ø 40, L 750 mm	Ø 2 L 29.5"	12	1,200	5.0 / 11.0	967.	X X.	X X.	X X.	X X.	X X X.				
FIO Set of 10	Ø 40, L 500 mm	Ø 2 L 19.6"	40	4,000		969.	X X.	X X.	X X.	X X.	X X X.				
	Ø 40, L 750 mm	Ø 2 L 29.5"	40	4,000											
LED		Warm-white		3000 K	(Standard)	X X X.	30.	X X.	X X.	X X.	X X X.	X			
CRI > 90		Neutral-white		4000 K	(Optional)	X X X.	40.	X X.	X X.	X X.	X X X.	X			
CRI > 80*		Extra warm-white		2700 K	(Optional)	X X X.	27.	X X.	X X.	X X.	X X X.	X			
		Extra warm-white		2200 K*	(Optional)	X X X.	22.	X X.	X X.	X X.	X X X.	X			
Dimming		Dimmable 0 - 10 V			(Standard)	X X X.	X X.	51.	00.	X X.	X X X.	X			
Finishes		11 white (Standard)		10 black (Optional) none textured		22 aluminum polished		27 brush-nished aluminum		30 anthracite		33 sand silver none textured			
		XX Custom nish (Standard)		35 gold		36 brass		37 bronze none textured		38 copper	X X X.	X X.	X X.	X X.	X X X.
Power Supply Cable		Z 70 Silver (Standard)													
						X X X.	X X.	X X.	X X.	X X.	Z70.	F			

Mounting version (F) with power supply cable, length 2000mm / 78.7"

Dimensions of canopy

Typ Size mm / inch

DB 90 (single version)
Ø 90 / H 53 mm / 3.5 x 2.0"

DBL 390 (set of 3)
L 390 x W 70 x H 70 mm
L 15.3 x W 2.7 x H 2.7"

Canopy finish: white (11)
contact factory for other nishes

USA/Canada: Canopy mounts to 4" octagonal junction box.

Complete order number

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Dry Location Enclosure (Included)

13.25" (L) x 5" (W) x 2.25" (H)
surface mount in any orientation

X X X.	X X.	X X.	X X.	X X.	Z70.	F
--------	------	------	------	------	-------------	----------

Complete order number

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Dry Location Enclosure (Included)

13.25" (L) x 5" (W) x 2.25" (H)
surface mount in any orientation

1) Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
2) Weight of lights without remote technical unit or canopy.