
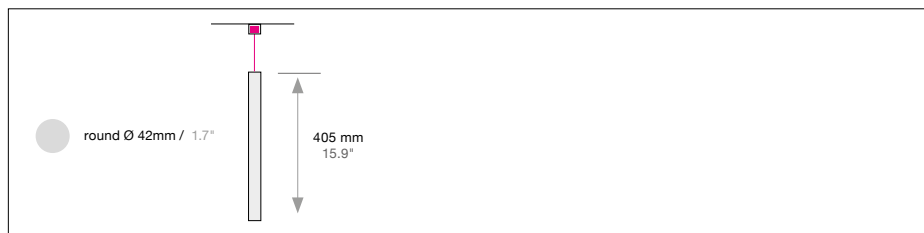


TIA

Housing: Pendant light, solid Aluminum housing
Design: SATTLER

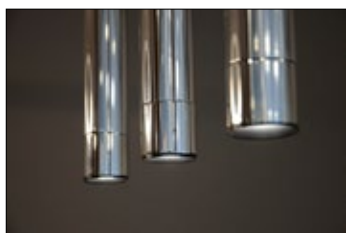

Size: Ø / L mm	Inches	LED	Watt	Lumen ¹	Weight kg ² /lbs ²	Beam angle	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
TIA Single	Ø 42, L 405 mm	Ø 1.7 L 15.9"	6.3	659	1 / 2.2	24°	975.	x x.	x x.	x x.	x x.	x x x.	x
LED Constant Current 200mA													
<div><div><div><div></div><div>LED</div></div></div><div><div><div></div><div>24°</div></div></div></div> <div><div>Standard:</div><div>Warm-white</div><div>3000 K</div></div>							x x x.	30.	x x.	x x.	x x.	x x x.	x
<div><div>CRI > 90</div><div>Mac Adam 3</div><div>SELV</div><div>L80 B10 100,000 hours</div></div> <div><div>Optional:</div><div>Neutral-white</div><div>4000 K</div><div>Extra warm-white</div><div>2700 K</div></div>							x x x.	40.	x x.	x x.	x x.	x x x.	x
							x x x.	27.	x x.	x x.	x x.	x x x.	x
Dimming							x x x.	x x.	51.	00.	x x.	x x x.	x
<div><div><div></div><div></div></div></div> <div><div>Standard:</div><div>0 - 10 V</div></div>							x x x.	x x.	51.	00.	x x.	x x x.	x
Finish													
<div><div>Standard:</div><div>66</div><div>bronze anodized</div></div> <div><div>Optional:</div><div>60</div><div>silver anodized</div><div>62</div><div>black anodized</div><div>65</div><div>champ. gold anodized</div></div>													
<div><div><div></div><div></div></div><div>Optional (Premium): 22 aluminum polished</div></div>							x x x.	x x.	x x.	x x.	--.	x x x.	x
Power supply cable													
<div><div>Standard:</div><div>Z 80</div><div>black matte</div></div>							x x x.	x x.	x x.	x x.	x x.	Z80.	x
Mounting version													
<div><div><div><div></div><div>F</div></div><div><div></div><div>F</div></div></div><div>Suspension with canopy DB78/32 and 1 power supply cable 2000 mm / 78.7"</div></div>													
<div><div><div><div></div><div>Canopy:</div></div><div><div>DB 78/32</div><div>Cover Ø 78 mm / 3.0" H 32 mm / 1.2" same Color as luminaire (60,62,65,66) white 12 (22 polished)</div></div></div><div><div>Included with Mounting version</div><div>Protective rating</div><div>F (single version)</div><div>IP 20</div></div></div>													
<div><div><div></div><div></div></div></div> <div><div>Complete order number</div><div>--. --. --. 00. --. Z80. _.</div></div>													
<div><div><div><div></div><div></div><div></div></div><div><div>W</div><div>H</div><div>L</div></div></div><div><div>Remote driver required ordered separately:</div><div>Type / Size mm / inch</div><div>L x W x H</div></div></div> <div><div>0-10V: ECO30W-200</div><div>13.25" x 5" x 2.25"</div></div>													
Input voltage for all external power supply units and canopy is 120-277 VAC 50-60 Hz													

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**