


TIA

Housing: Pendant light, solid aluminum housing
 Design: SATTLER

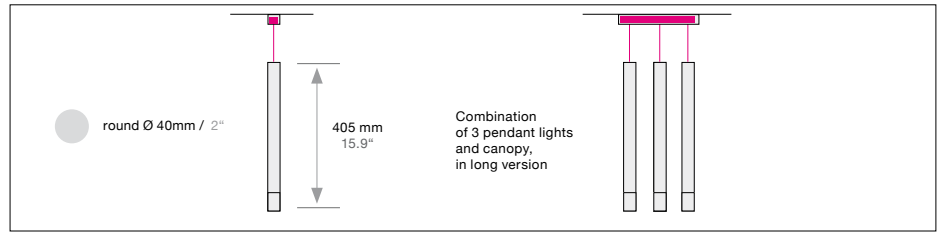

| | Size: Ø mm | inches | LED Watt | Lumen ¹⁾ | weight kg ²⁾ / lbs ²⁾ | Item No. | LED | Dimming | LED | Finishes | Power Supply cable | Mounting Version |
|-----------------------------|----------------------------|--------------------|-------------------------------------|-----------------------------------|---|-------------------------|---|----------------|--------|----------|--------------------|------------------|
| TIA Single | Ø 40, L 405 mm | Ø 2 L 15.9" | 4 | 400 | 1 / 2.2 | 975. | x x x. | x x x. | x x x. | x x x. | x x x. | x |
| TIA Combination of 3 | Ø 40, L 405 mm | Ø 2 L 15.9" | 12 | 1,200 | 5 / 11.0 | 976. | x x x. | x x x. | x x x. | x x x. | x x x. | x |
| LED | | | | | | | | | | | | |
| CRI > 90 CRI > 80* | | | | | | | | | | | | |
| | | | Warm-white | 3000 K | (Standard) | x x x. | 30. | x x x. | x x x. | x x x. | x x x. | x |
| | | | Neutral-white | 4000 K | (Optional) | x x x. | 40. | x x x. | x x x. | x x x. | x x x. | x |
| | | | Extra warm-white | 2700 K | (Optional) | x x x. | 27. | x x x. | x x x. | x x x. | x x x. | x |
| | | | Extra warm-white | 2200 K* | (Optional) | x x x. | 22. | x x x. | x x x. | x x x. | x x x. | x |
| Dimming | | | Dimmable 0 - 10 V | | (Standard) | x x x. | x x x. | 51. 00. | x x x. | x x x. | x x x. | x |
| Finishes | | | | | | | | | | | | |
| (Standard) | 11 white | (Optional) | 10 black fine textured | 22 aluminum polished | 27 brush-finished aluminum | 30 anthracite | 33 sand silver fine textured | | | | | |
| | | | | | | | | | | | | |
| | XX Custom finish | | 35 gold | 36 brass | 37 bronze fine textured | 38 copper | | x x x. | x x x. | x x x. | x x x. | x |
| Power Supply Cable | | | | | | | | | | | | |
| (Standard) | Z 70 Silver | | | | | | | | | | Z70. | F |

Mounting version (F) with power supply cable, length 2000mm / 78.7"

Dimensions of canopy

Typ Size mm / inch

DB 90 (single version)
Ø 90 / H 53 mm / 3.5 x 2.0"

DBL 390 (set of 3)
L 390 x W 70 x H 70 mm
L 15.3 x W 2.7 x H 2.7"

Canopy finish: white (11)
contact factory for other finishes

USA/Canada: Canopy mounts to 4" octagonal junction box.

| | | | | | | |
|--------|--------|--------|--------|--------|-------------|----------|
| x x x. | x x x. | x x x. | x x x. | x x x. | Z70. | F |
|--------|--------|--------|--------|--------|-------------|----------|

Complete order number

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Dry Location Enclosure (Included)

13.25" (L) x 5" (W) x 2.25" (H)
surface mount in any orientation