





Ordering Information								
WG-P20LDL	Fixation	Pattern	Length	Power <sup>1</sup>	CRI/ CCT <sup>2</sup>	Driver <sup>3</sup>	Lens	Finish
WG-20LDL-S	48 (std) 96	S	24 36 48 60 72 84 96 Specify ≤96"	L M	927 930 935 940	X S D010 L3DAE L3DOE DFPN	OD (std) SD	W (std) B G F

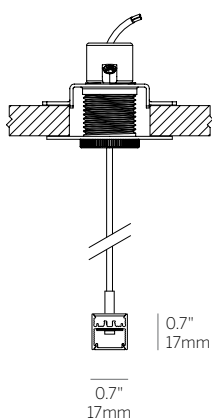

Gypsum Ceiling

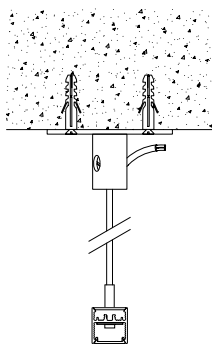

Solid Ceiling

### Luminaire

- Evenly illuminated snap-in lens without visible LED pattern.
- Standard Opal Diffuser for even illumination and no LED appearance. Satin Diffuser for high efficiency and minimal LED appearance.
- Field replaceable LED boards.
- 90+ CRI, 3 steps MacAdam.
- Powder coat painted white - RAL 9010.

### Fixation

- 48 = 48" suspension cable standard
- 96 = 96" suspension cable, field-cuttable

### Pattern

- S = Straight run (individual fixtures only, for other configurations see WG-S20LDI)

### Length

- 24 = 24"
- 36 = 36"
- 48 = 48"
- 60 = 60"
- 84 = 84"
- 96 = 96"
- Specify ≤96"

### Power<sup>1</sup>

- L = 3.2W/ft low power (24V)
- M = 6.4W/ft mid power (24V)

### CRI/CCT<sup>2</sup>

90+ CRI (Low/Mid Power)

- 927 = 2700K (188/348 lm/ft)
- 930 = 3000K (194/359 lm/ft)
- 935 = 3500K (198/366 lm/ft)
- 940 = 4000K (200/370 lm/ft)

### Driver (remote)<sup>3</sup>

- X = No driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC

### Lens

- OD = Satin Opal Diffuser (standard)
- SD = Satin Clear Diffuser (high efficiency)

### Finish

- W = White, 20% gloss, RAL9010 (standard)
- B = Black, 20% gloss
- G = Gray, 20% gloss
- F = Custom finished trim, specify RAL

### Emergency

- Emergency LED driver available, order separately.

<sup>1</sup> Wattage shown does not include power supplies/drivers.

<sup>2</sup> Delivered lumens with satin opal diffuser shown.

<sup>3</sup> Remote power supply required. See power supply page for details.