





20 Linear Bezel Trim Pattern 4 Sided Submittal

Project Name _____ SO # _____


Fixture Type _____ PO# _____

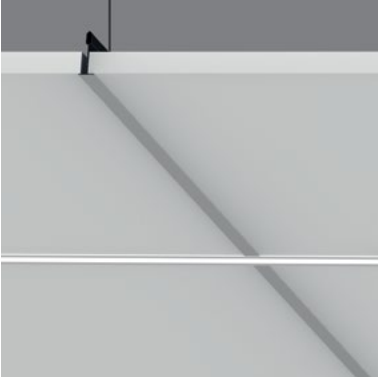

Recessed Bezel Trim (RBT)



Solid Ceiling Mounting Options

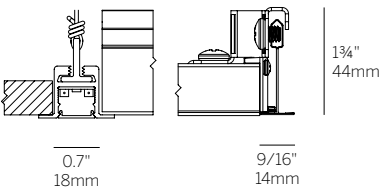

Grid On Bezel Front Section Elevation
Bezel Flush to Grid Ride Side Elevation

Ordering Information

Model	Fixation	Pattern	Length	Power ²	CRI/CCT ³	Driver ³	Lens	Finish	Cable
WG-20LDL	RBT RGT9 RGT15	P ¹ PPO PPI	A A x B A x B x C A x B x A x B	L M	927 930 935 940	X S D010 L3DAE L3D0E DFPN	OD (std) SD	W (std) B G F	C4 (std) C10 C20 C30

Luminaire

- Very shallow depth: 0.8".
- Continuous snap-in Satin Opal Diffuser for even illumination without visible LED pattern.
- Continuous mounting to any desired length (within 1/4") as well as standard grid multiples.
- Remote driver options. Field replaceable LED boards.
- 90+ CRI, 3 Steps MacAdam delivering excellent color rendering.
- Lengths and angles factory-cut to exact field dimensions.
- Standard and custom corners.
- Configurations may include straight, angles and change in elevation such as wall-to-ceiling applications.

Fixation

- RBT = Recessed Bezel Trim
- RGT9 = Recessed Grid Trim 9/16"
- RGT15 = Recessed Grid Trim 15/16"

Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

Power²

- L = 3.2W/ft low power (24V)
- M = 6.4W/ft mid power (24V)

CRI/CCT³

- 90+ CRI (Low/Mid Power)
- 927 = 2700K (188/348 lm/ft)
 - 930 = 3000K (194/359 lm/ft)
 - 935 = 3500K (198/366 lm/ft)
 - 940 = 4000K (200/370 lm/ft)

Driver (remote)³

- X = No driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC

Lens

- OD = Satin opal diffuser (standard)
- SD = Satin clear diffuser (high efficiency)

Finish

- W = White, 20% gloss, RAL9010 (standard)
- B = Black, 20% gloss
- G = Gray, 20% gloss
- F = Custom finished trim, specify RAL

Cable

- C4 = 4' tray cable (plenum rated) (standard)
- C10 = 10' tray cable (plenum rated)
- C20 = 20' tray cable (plenum rated)
- C30 = 30' tray cable (plenum rated)

Emergency

- Emergency LED driver available, order separately.

¹ See pattern spec sheet.

² Wattage shown does not include power supplies/drivers.

³ Delivered lumens with satin opal diffuser shown.

⁴ Remote power supply required. See power supply page for details.

Customer Approval

- Approved
- Approved with corrections noted
- Revise and Resubmit

Company _____


Signature _____

Print Name _____


Date _____

Original Date Submitted _____

Typical 96W Driver System Layout

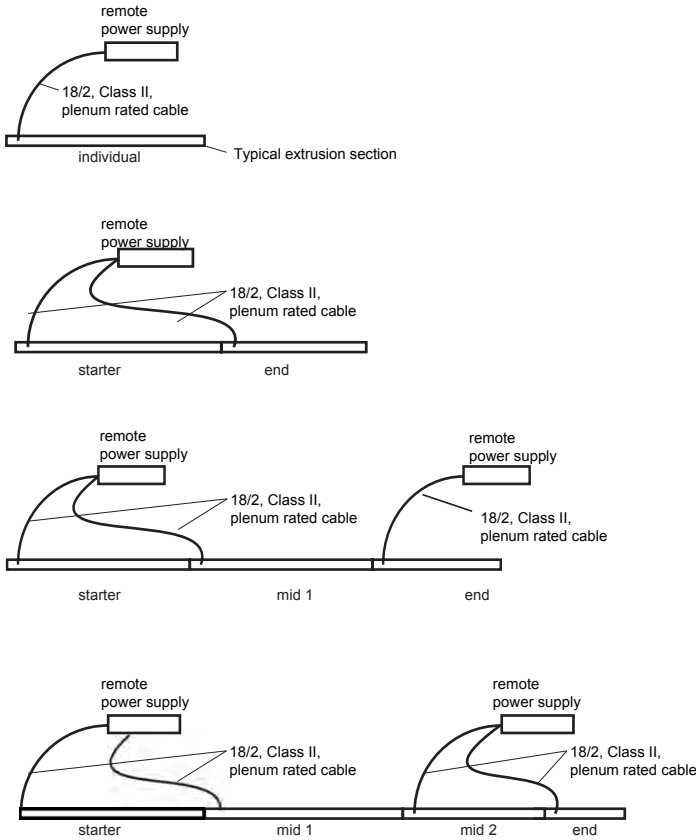

Typical 40W Driver System Layout

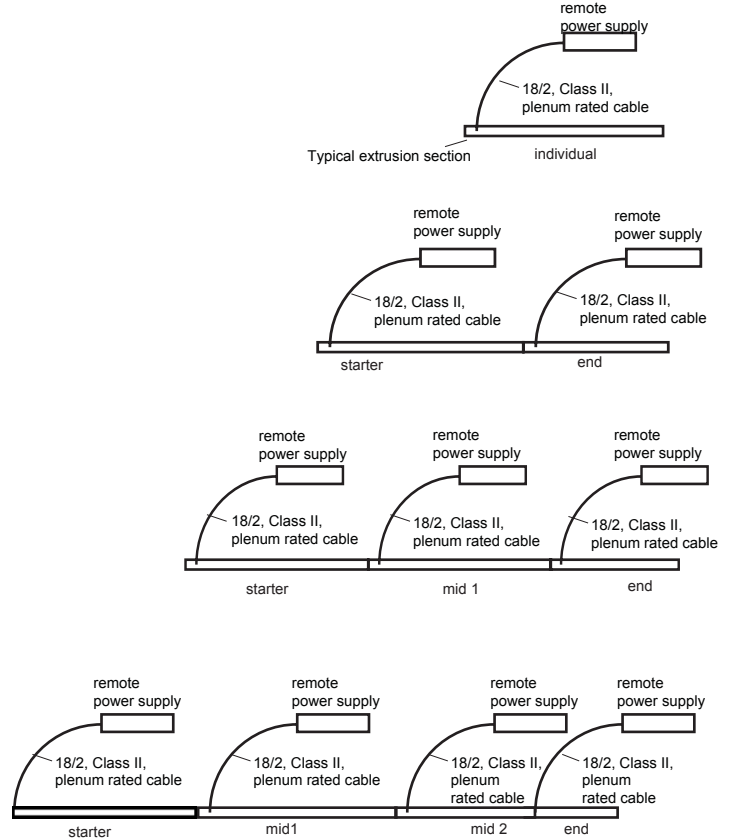

Non-Dimming (S), 0-10v (D010), and 0.1% Lutron Ecosystem (L3D0E) Dimming Systems: 1% Lutron Ecosystem (L3DAE) and 1% Phase Forward (DFPN) Dimming Systems:

- | | |
|--|--|
| <ul style="list-style-type: none"> 1. 96.25" maximum fixture length. 2. 96W, 24V, constant voltage power supply (12 linear feet of fixture / driver max at 6.4w/ft, 24 linear feet of fixture / driver max at 3.2w/ft) | <ul style="list-style-type: none"> 1. 72" maximum fixture length at 6 W/ft, 96" maximum fixture length at 3 W/ft. 2. 40W, 24V, constant voltage power supply (6 linear feet of fixture / driver max at 6.4w/ft, 12 linear feet of fixture / driver max at 3.2w/ft) |
|--|--|

General Notes for all system types:

- 1. End caps supplied in kits to be field installed at the end of each fixture.
- 2. Starters and Mid 1 extrusion sections are supplied with maximum lengths for long linear systems.
- 3. End extrusion sections have custom tailored length between 23.8" - 96.25" to obtain the overall system length.
- 4. When an End is calculated to be less than 23.8", a Mid 2 extrusion added to the system to split the length into manageable sizes.
- 5. Class II, plenum rated cable supplied hardwired to extrusion section, 4 ft length standard. Longer lengths available (specify when ordering)

20 Linear Bezel


Submittal Pattern 4 Sided

Project Name _____ SO # _____


Fixture Type _____ PO# _____

System	Qty.	A	B	Approximate Driver QTY
1	_____	_____	_____	_____
2	_____	_____	_____	_____
3	_____	_____	_____	_____
4	_____	_____	_____	_____
5	_____	_____	_____	_____

Grid Ceiling Application Measurement (G9/G15)

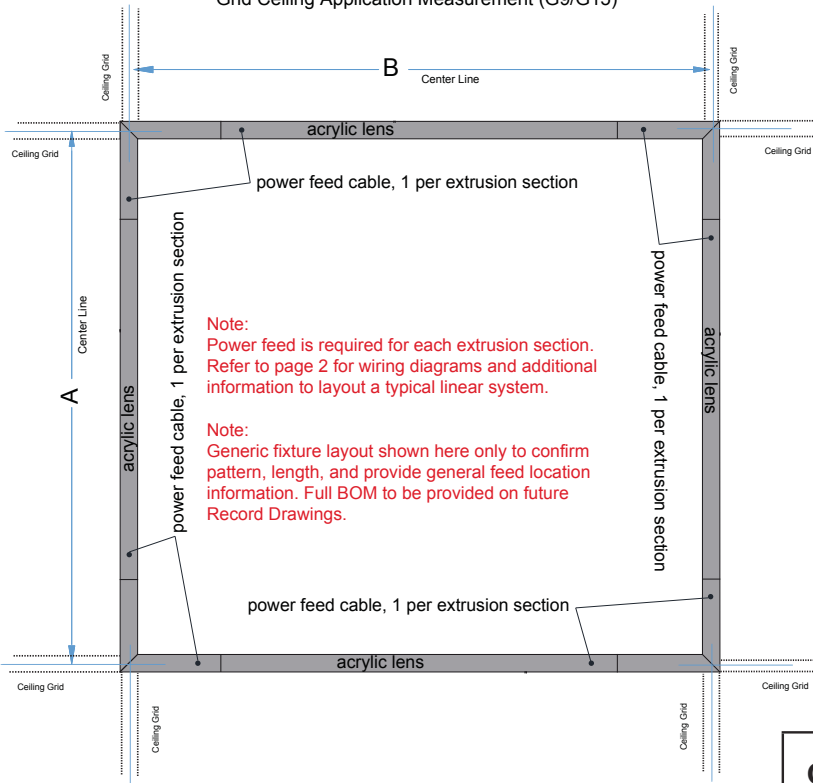

Hard Ceiling Application Measurement

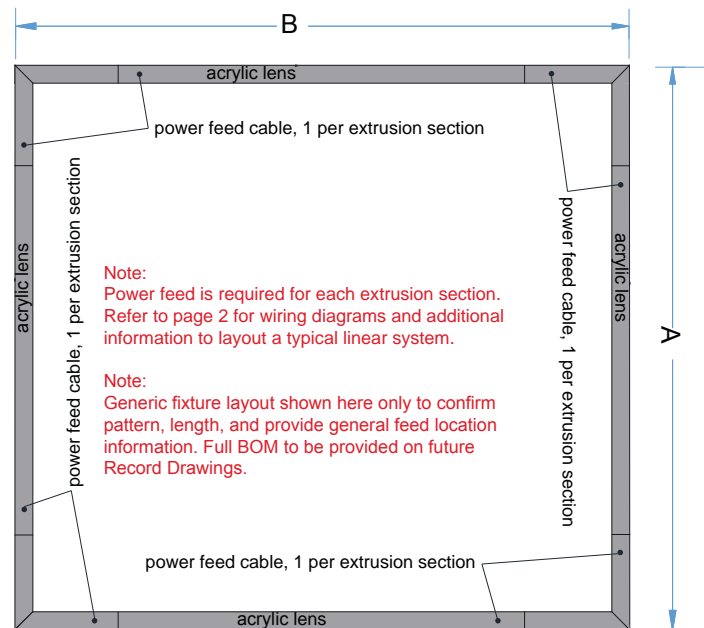

Customer Approval	
Company _____	_____
<input type="checkbox"/> Approved	Signature _____
<input type="checkbox"/> Approved with corrections noted	Print Name _____
<input type="checkbox"/> Revise and Resubmit	Date _____