

# 20 Linear Under Cabinet LED

## Specifications



Ordering Information									
WG-UC20LDL	Type	Length	LED <sup>1</sup>	Color <sup>2</sup>	Voltage	Power <sup>3</sup>	Diffuser	Mount	Options
WG-UC20LDL	S	18 24 30 36 42 48	L	827 830 835 840 927 930 935 940	120	S	OD (std) SD	MM CM	W

### Luminaire

- Under cabinet and task light.
- Standard Opal Diffuser for even illumination and no LED appearance. Satin Diffuser for high efficiency and minimal LED appearance.
- Field replaceable LED boards.
- 80+ CRI, 3 steps MacAdam.
- Anodized aluminum finish standard. Optional white finish.
- On / Off switch with 118" cable and plug, standard.

### Type

- S = Straight run (For other product configurations see SM20.)

### Length

(total length includes 1" for switch, requires 1" clearance for cable)

- 18 = 18"
- 24 = 24"
- 30 = 30"
- 36 = 36"
- 42 = 42"
- 48 = 48"

### LED<sup>1</sup>

- L = Low Power (3.2W/ft)

### Color / Lumens<sup>2</sup>

80+ CRI minimum (Low)

- 827 = 2700K (316 lm/ft)
- 830 = 3000K (343 lm/ft)
- 835 = 3500K (343 lm/ft)
- 840 = 4000K (355 lm/ft)
- For 90+ CRI specify 927, 930, etc.

### Voltage

- 120 = 120V

### Power Supply (remote)<sup>3</sup>

- S = Standard driver 120 - 240V, 50 - 60 Hz

### Diffuser


- OD = Opal diffuser (standard)
- SD = Satin diffuser

### Mounting

- MM = Magnetic mounting
- CM = Clip mounting

### Options

- W = White finish

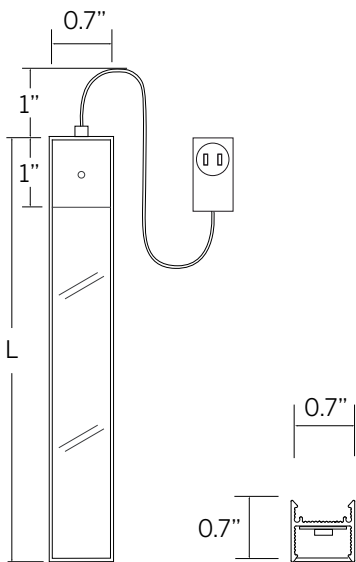

- 1 Wattage shown does not include power supplies/drivers.
- 2 Delivered lumens with satin diffuser shown. Lumens for CRI 90(+), are about 16% lower compared to standard CRI 80(+).
- 3 24V fixture supplied complete with individual socket mount power supply 120-240V, 50-60 Hz and feed cable.

# 20 Linear Under Cabinet LED

## Dimensions

