


# 60 Linear Surface Flush Lens

## WG-60LDL-...-OD-W Delivered Lumens Per Foot

	Power					RGBW [7.6 W/ft] <sup>1</sup>
	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]		
<b>CCT</b>						
927	361	678	1042	1534	-	-
930	376	705	1085	1598	-	-
935	389	731	1124	1673	-	-
940	399	750	1154	1718	-	-
TW <sup>1</sup>	-	337	518	-	-	-
RGBW <sup>1</sup>	-	-	-	-	-	284

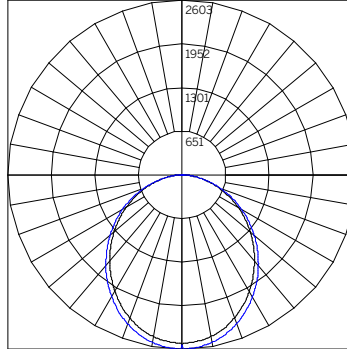


BEAM ANGLE (0-180) = 104.4  
BEAM ANGLE (90-270) = 103.2

## ILLUMINANCE - 48" OD P4 3000K WG-60LDL-...-S-48-930-P4-...-OD-W<sup>1</sup>

Mounting Height [ft]	Illuminance [fc at max cd]	Beam Width [ft]
2	651	5.2
4	163	10.3
6	72	15.5
8	41	20.6
10	26	25.8
12	18	30.9
14	13	36.1
16	10	41.2
18	8	46.4
20	7	51.6

## WG-60LDL-...-DD-W Delivered Lumens Per Foot

	Power					RGBW [7.6 W/ft] <sup>1</sup>
	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]		
<b>CCT</b>						
927	347	652	1003	1477	-	-
930	361	679	1044	1538	-	-
935	374	703	1082	1611	-	-
940	384	722	1111	1654	-	-
TW <sup>1</sup>	-	324	499	-	-	-
RGBW <sup>1</sup>	-	-	-	-	-	274

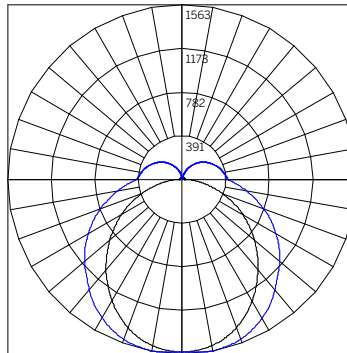

BEAM ANGLE (0-180) = 123.0  
BEAM ANGLE (90-270) = 106.6

## ILLUMINANCE - 48" DD P4 3000K WG-60LDL-...-S-48-935-P4-...-DD-W<sup>1</sup>

Mounting Height [ft]	Illuminance [fc at max cd]	Beam Width [ft]
2	391	7.4
4	98	14.7
6	43	22.1
8	24	29.5
10	16	36.9
12	11	44.2
14	8	51.6
16	6	59.0
18	5	66.4
20	4	73.7

Power Multiplier					
	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	RGBW [7.6 W/ft] <sup>1</sup>
	0.23	0.44	0.67	1.00	0.17

CCT Multiplier					
	927	930	935	940	TW <sup>1</sup>
	0.96	1.00	1.05	1.08	0.46

1 TW Tuneable White lumen data at maximum output / 4000K CCT. RGBW lumen data at maximum output for all colors + white.  
2 Polar Plot and Cone of Light are applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.