


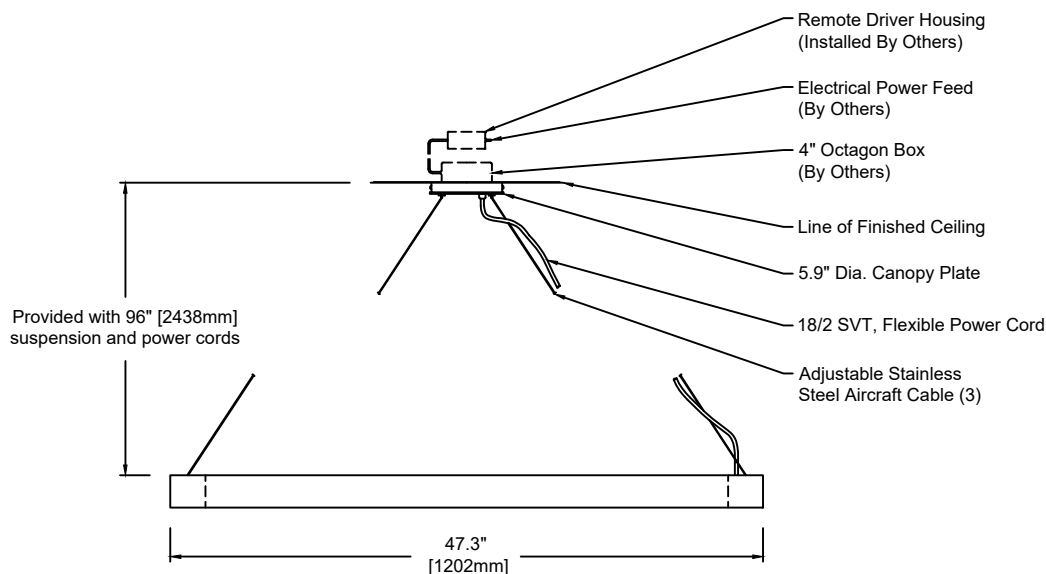


## TECHNICAL SHEET

# Ring U

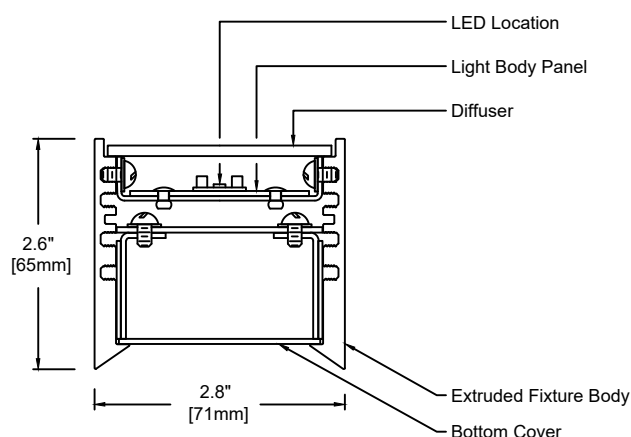

**PERSPECTIVE VIEW**

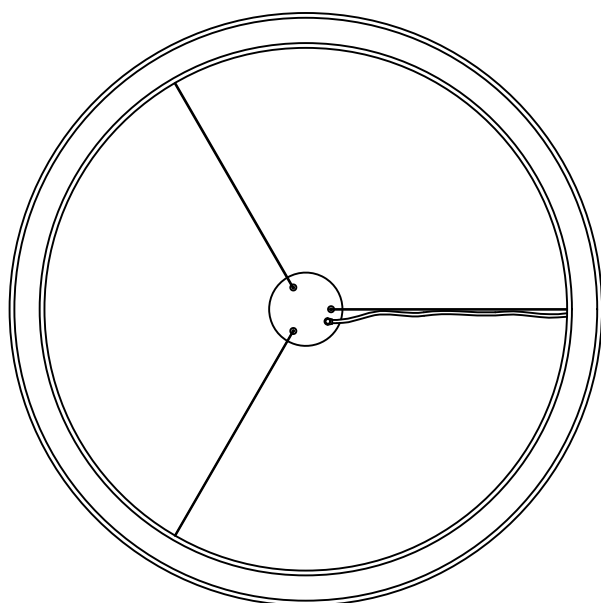

**Cross Section**

Scale: N.T.S.

Drawing 1 of 2

Fixture Weight : 22 lbs

1693	P	48	M	830	U	S	SA	19	CE - CC
Model	Type	Size	Wattage	Color Temp	Voltage	Control	Diffuser	Finish	Options
Wattage and Control	P - Pendant	48"	L	827 - 2,700K	1 - 120 VAC only U - 120/277 V	S	SA - Satin Clear Acrylic	19 - Painted Anodized Aluminum - RAL 9006 Matte	CE - Center Canopy
			M	830 - 3,000K		D010		CC - Clear Insulated	
			RGB	835 - 3,500K		DFPN		Cable (Standard)	
			840 - 4,000K	L3DAE		WC - White Cable			
			RGB - RGB	L3D0E		BC - Black Cable			
						DMX		21 - Painted White - RAL 9010 Matte	
								26 - Painted Black - RAL 9005 Matte	
								22 - Painted Custom Color	

### Wattage and Control

Control (Remote 24V):  
S - Non-Dim  
D010 - 0-10V 10%  
DFPN - Lutron Forward Phase 1%, 120VAC  
L3DAE - Lutron Hi-Lume 1% EcoSystem  
L3D0E - Lutron Hi-Lume Premier 0.1% EcoSystem  
DMX - DMX Dimming

Wattage "L" - 35 Watt  
2,700K - 4,667 lm  
3,000K - 4,667 lm  
3,500K - 4,854 lm  
4,000K - 4,947 lm

Wattage "M" - 70 Watt  
2,700K - 8,669 lm  
3,000K - 8,669 lm  
3,500K - 9,030 lm  
4,000K - 9,205 lm

Technical Data:  
Form - linear, Operating voltage: 24VDC  
Color rendering index Ra min: 82 CRI, Available in 90 CRI  
Viewing angle: 110°  
Lifetime - L70: 60,000h  
Working temperature: -20°C to 60°C (-4°F to 140°F)

Wattage "RGB" - 125 Watt / 3,243 lm

Technical Data for RGB:  
Form - tape, Operating voltage: 24VDC  
Viewing angle: 120°  
Lifetime - L70: 50,000h  
Working temperature: -30°C to 75°C (-22°F to 167°F)

Remote Drivers:  
Max. wiring distance / Load

Wire Gauge	≤48W	≤72W	≤96W	≤40W	≤96W
#18AWG	37'	25'	18'	15'	25'
#16AWG	59'	39'	29'	25'	40'
#14AWG	95'	63'	47'	40'	60'

Lutron


**inter•lux**

inter-lux.com

All specifications subject to change without notice © 2019


almlighting.com





# Ring U

## TECHNICAL SHEET

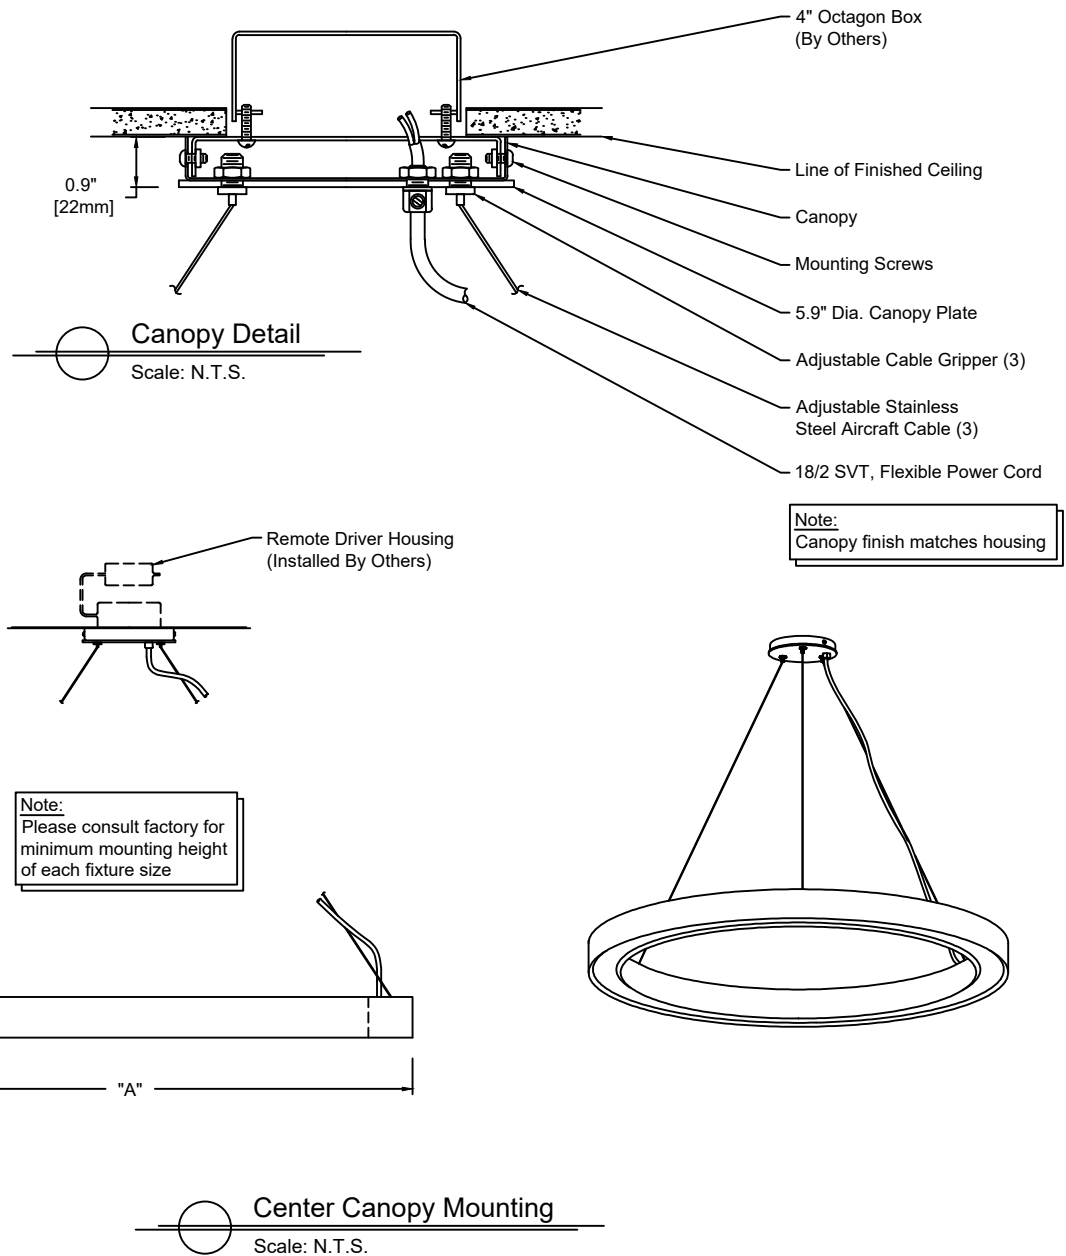

Drawing 2 of 2

Series: 1693

Remote Drivers:					
Max. wiring distance / Load					
Wire Gauge	Osram			Lutron	
	≤48W	≤72W	≤96W	≤40W	≤96W
#18AWG	37'	25'	18'	15'	25'
#16AWG	59'	39'	29'	25'	40'
#14AWG	95'	63'	47'	40'	60'

inter•lux

inter-lux.com

All specifications subject to change without notice © 2019

almlighting.com

