

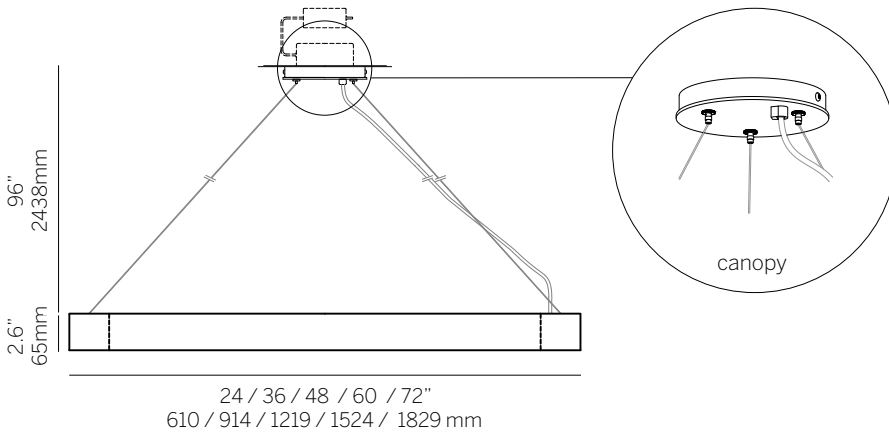


Ring U

The Ring U is for uplight only - where the requirement is to provide glare-free light that fills the space. Consider the many standard and custom modifications that can be used to make this a unique solution.



Center Canopy (standard)
(suspension varies with fixture size please confirm with factory)

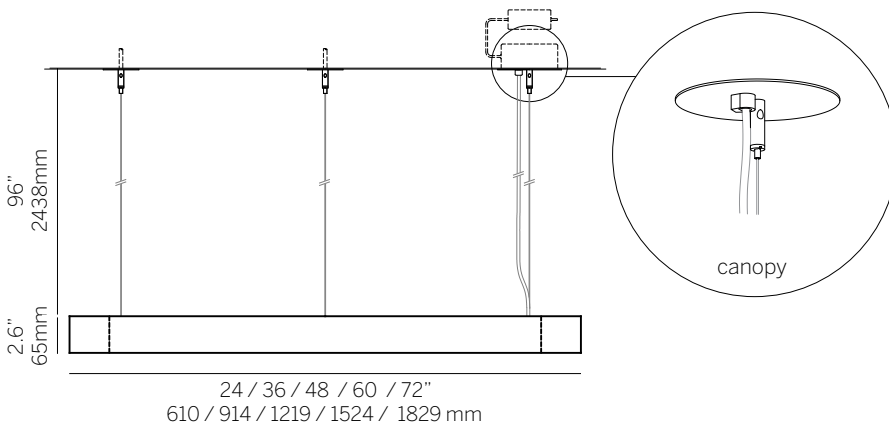

Straight Cables

Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Canopy finish matches housing
- ⁴96" clear insulated cable standard

Model 1693

1693

Type

P Pendant

P

Size

24 24"
36 36"
48 48"
60 60"
72 72"

CustX

Wattage¹

24"
L 17W (2267lm)
M 34W (4211lm)
RGB 60W (1551lm)
36"
L 26W (3467lm)
M 52W (6440lm)
RGB 92W (2397lm)
48"
L 35W (4667lm)
M 70W (8669lm)
RGB 125W (3243lm)
60"
L 45W (6000lm)
M 90W (11145lm)
RGB 162W (4230lm)
72"
L 54W (7200lm)
M 108W (13374lm)
RGB 195W (5076lm)

Color Temp²

827 2700
830 3000
835 3500
840 4000
RGB RGB

Voltage

U 120/277
1 120VAC only

Control (Remote 24V)

S Non-dim
D010 0-10V 10%
DFPN Lutron Forward Phase 1% 120VAC
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Lutron Hi-lume Premier 0.1% EcoSystem
DMX DMX dimming

Diffuser

SA Satin clear acrylic

SA

Finish³

19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Options

CE Center canopy
SC Straight cables
CC Clear insulated cable (standard)⁴
WC White cable
BC Black cable

