
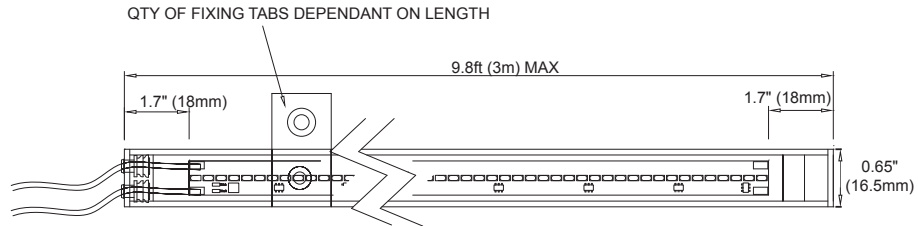



Interior LED Channel

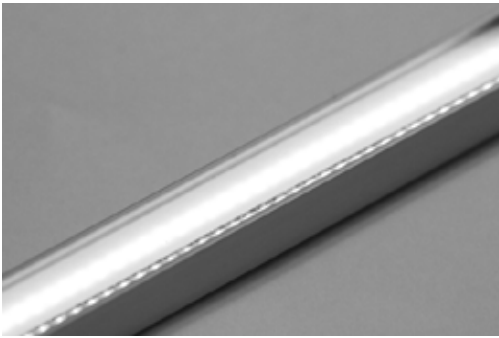

Micro LED strip fitted into 0.65" x 0.47" channel.
Interior use only. Channel length up to 9.8ft (3m);
strip comes in 1 inch (25mm) increments.

- | | | |
|-------------|--|--|
| Materials: | Aluminum, acrylic | |
| Color Temp: | 2700K, 3000K, 4000K | |
| Lamp: | MSL G3.2 Standard Output or
MSL G3.2 High Output | G3.2 Standard Output |
| CRI: | ≥90 | LEDs at 1.79mm centers / 280 LEDs per 20" (500mm) strip
Consumption: 5 W/ft (16.8 W/m)
Output: 456 lm/ft (1496 lm/m) |
| Finish: | Anodized aluminum | |
| Dimming: | EldoLED 0-10V, DMX or Wallbox control | G3.2 High Output |
| Supply: | 24V DC from a dedicated driver (12V for red, yellow,
green and amber) | LEDs at 1.79mm centers / 280 LEDs per 20" (500mm) strip
Consumption: 9.5 W/ft (31.2 W/m)
Output: 824 lm/ft (2702 lm/m) |
| Fixing: | Via fixing tabs at either end or anywhere along the
length (1 supplied every 20" (500mm) as standard) or
via M3 linear thread anywhere along the back of the
extrusion. | |
| Deviations: | Mounting options. Clear cover available as
diffuser. Anything over 9.8ft (3m) will be supplied
in more than 1 section. | |

Alternative adjustable hinge mounts;

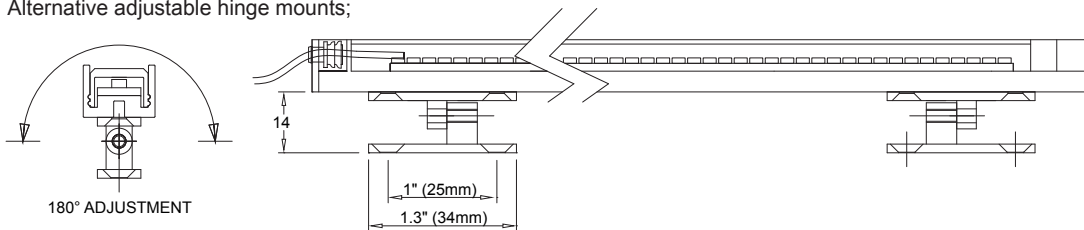

Order Code	Series.color.lumen code.length.dimming
Example	Int channel.3000K.High.20".D010

Series	Color	Lumen Code-Max Output & CRI	Length	Dimming and control	Mounting Options	Accessory Options
Interior LED Channel	2700K 3000K 4000K	Standard...G3.2 5W/ft, 456lm/ft High.....G3.2 9.5W/ft, 824 lm/ft	Specify length in 1 inch increments	D010.....0-10V DMX.....DMX WBC.....Wallbox control	Fixing tabs (standard) M3 linear thread Adjustable hinge 180°	FD.....Frosted diffuser CD.....Clear diffuser

