




LIGHT IN NEW DIMENSIONS

2017 | 2018

SATTLER

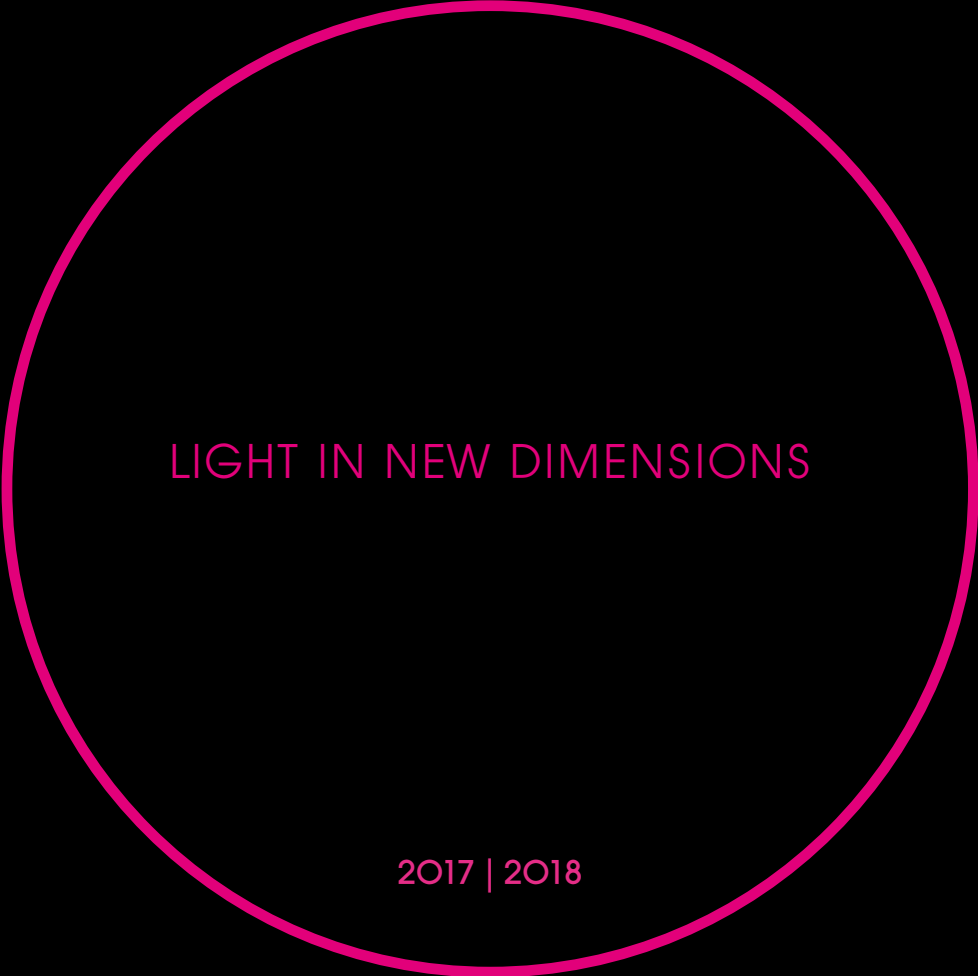

Lighting is about creating an environment that uses light as the main medium of expression. It means having one's work blend seamlessly with the architecture, often at the risk of not being seen. It's about giving definition to a space.



ATTENTION TO DETAIL

Successful new product developments emerge from an understanding of materials and shapes, in combination with a high attention to detail. Quality "Made in Germany" is self-evident for us. Therefore, ergonomic, economical, and practical aspects are taken into account already at an early stage of product development.



“The true greatness of our
products is in the detail”

Ulrich Sattler

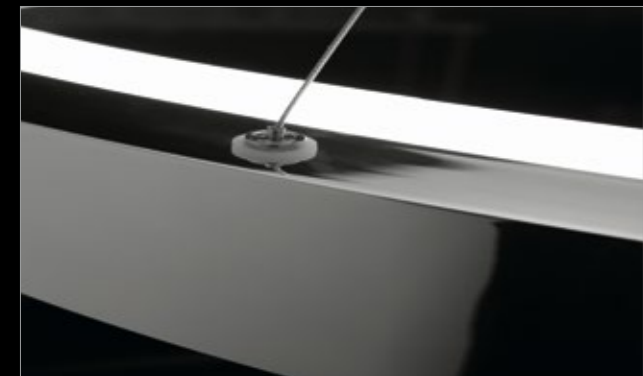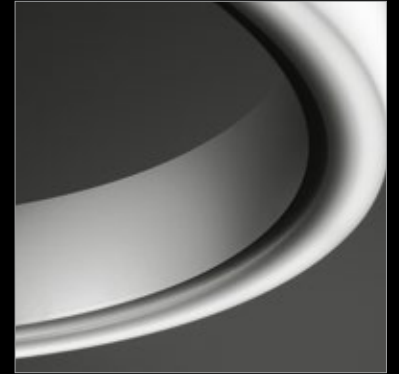

SOFT DELTA	6
SOFT QUADRA	20
SOFT SQUARE	24
CIRCOLO	29
ELLIPSE	46
CIRCOLO INVERSE	50
ANELLO	62
LUCE VERDE ANELLO	74
LUCE VERDE SLIM	80
HIGHMOON FLAT	82
QUADRA	84
SKY	86
ANGOLO	88
ACOUSTIC LIGHT PANEL NEW	92
DOPPIO	102
DOPPIO ELLIPSE NEW	116
DOPPIO LINEA	122
CIRCOLO MINI	124
SLIM ELLIPSE NEW	130
SLIM	134

GIRATA	148
TRIS	152
INSOSPESO CEILING	154
INSOSPESO PENDANT	156
INSOSPESO WALL	158
SLIM WALL	160
TOCCATA	162
INSIEME	168
FIO	176
TIA	182
Finishes	193
Technical Information	195
SELECTION LINE	200
CIRCOLO SELECTION	202
ROTOLO SELECTION	216
Finishes	234
Technical Information	235

SOFT DELTA

Project: Bords de Seine 1, Paris,
Photo: Burg & Schuh | Palladium Photodesign

SOFT DELTA




SOFT DELTA 119.1"

Project: Kreissparkasse Tuttlingen.
Architect: Binder, Tuttlingen
Photo: Sattler



SOFT DELTA




SOFT DELTA 68.3"

Office Project London
Lighting Design: Nulty, London
Architect: Stiff + Trevillion, London




SOFT DELTA



SOFT DELTA 68.3"



SOFT DELTA

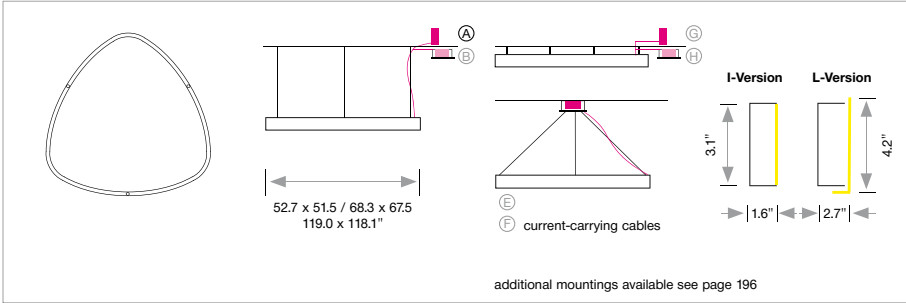

Housing:	Aluminum profile, integrated (I) or L-shaped acrylic cover (L)				
Mounting:	Pendant light, 3 point steel cable suspension, 196.8" Power supply cable in silver, incl. external power supply unit for suspended ceiling (A)				
Lamping:	LED-technology 24V, neutralwhite 4000 K (69), CRI > 80				
Size: L x W x H inch	Watt	Lumen ¹ LED	Weight ² lbs	Item No.	White
SOFT DELTA				I-Version	
52.7 x 51.5"	64	5,862	30.0	849.69.01.00.	11
68.3 x 67.5"	82	6,657	37.5	861.69.01.00.	11
119.0 x 118.1"	145	11,772	59.0	863.69.01.00.	11
SOFT DELTA				L-Version	
52.7 x 51.5"	64	6,176	30.0	848.69.01.00.	11
68.3 x 67.5"	82	6,883	37.5	860.69.01.00.	11
Optional:	LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22) LED-RGB-color control (60) Dimmable: 0-10V, 1-10V, DALI or DMX Mounting versions: B, E, F, G, H, R, S, T (page 196) Finishes: 10, 22, 27, 30, 32, 33, 35, 36, 37, 38, 40, 42, 44 (page 193) Colored power supply cable (page 194) Remote control, Bluetooth				
Design:	SATTLER				

For technical information, see specification sheet: inter-lux.com/sattler

4000 K
(69)

IP 20

F

III

EEMark

CE

optional: 48 Bluetooth


tunable white
2700-6500K (65)

RGB



SOFT DELTA

LIGHT + ACOUSTIC




SOFT DELTA ACOUSTIC
52.8" | 68.3"

Project: Infinity Amsterdam, MVSA - Architects,
Client: Dutch Light Pro – Ridderkerk, Photo: Nathalie Peters
Delivered by: Unique Brands b.v. – Alblasterdam



SOFT DELTA
LIGHT + ACOUSTIC

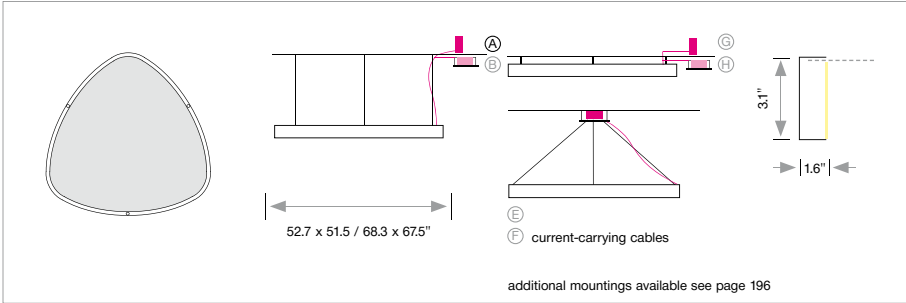

Housing:	Aluminum profile, integrated (I) acrylic cover Fabric covering (fire rating B1) as a light and acoustic diffuser				
Mounting:	Pendant light, 3 point steel cable suspension, 196.8" Power supply cable in silver, incl. external power supply unit for suspended ceiling (A)				
Lamping:	LED-technology 24V, neutralwhite 4000 K (69), CRI > 80				
Size: L x W x H inch	Watt	Lumen ¹ LED	Weight ² lbs	Item No.	White
SOFT DELTA					
52.7 x 51.5 x 3.1"	64	5,642	30.0	850.69.01.00.	11
68.3 x 67.5 x 3.1"	82	6,412	37.5	862.69.01.00.	11
Optional:	LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22) LED-RGB-color control (60) Dimmable: 0-10V, 1-10V, DALI or DMX Mounting versions: B, E, F, G, H, R, S, T (page 196) Finishes: 10, 22, 27, 30, 32, 33, 35, 36, 37, 38, 40, 42, 44 (page 193) Colored power supply cable (page 194) Remote control, Bluetooth				
Design:	SATTLER				

For technical information, see specification sheet: inter-lux.com/sattler

4000 K
(69)

IP 20

F

III

optional:


Bluetooth

tunable white
2700-6500K (65)

RGB




SOFT QUADRA



SOFT QUADRA 66.7"




SOFT SQUARE
SOFT QUADRA

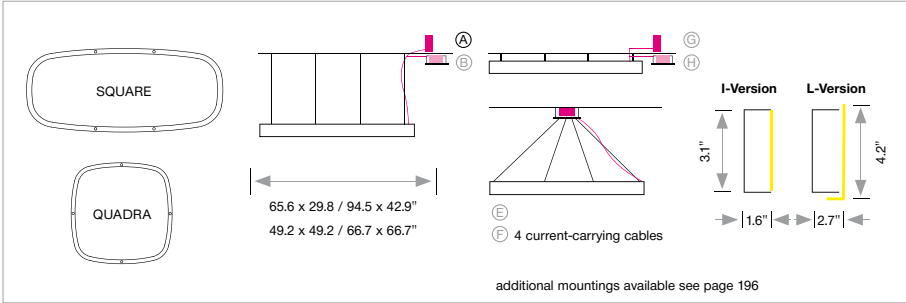

Housing:	Aluminum profile, integrated (I) or L-shaped acrylic cover (L)				
Mounting:	Pendant light, 4 point steel cable suspension, 196.8" Power supply cable in silver, incl. external power supply unit for suspended ceiling (A)				
Lamping:	LED-technology 24V, neutralwhite 4000 K (69), CRI > 80				
Size: L x W x H inch	Watt	Lumen ¹ LED	Weight ² lbs	Item No.	White
SOFT SQUARE				I-Version	
65.6 x 29.8"	66	5,366	33.1	825.69.01.00.	11
94.5 x 42.9"	89	7,803	37.5	837.69.01.00.	11
SOFT SQUARE				L-Version	
65.6 x 29.8"	65	5,822	33.1	824.69.01.00.	11
94.5 x 42.9"	89	8,415	37.5	836.69.01.00.	11
SOFT QUADRA				I-Version	
49.2 x 49.2"	68	5,423	33.1	801.69.01.00.	11
66.7 x 66.7"	89	7,359	37.5	813.69.01.00.	11
SOFT QUADRA				L-Version	
49.2 x 49.2"	68	5,855	33.1	800.69.01.00.	11
66.7 x 66.7"	89	7,923	37.5	812.69.01.00.	11
Optional:	LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22) LED-RGB-color control (60) Dimmable: 0-10V, 1-10V, DALI or DMX Mounting versions: B, E, F, G, H, R, S, T (page 196) Finishes: 10, 22, 27, 30, 32, 33, 35, 36, 37, 38, 40, 42, 44 (page 193) Colored power supply cable (page 194) Remote control, Bluetooth				
Design:	SATTLER				

For technical information, see specification sheet: inter-lux.com/sattler



Project: BRAUN Kabel, Remshalden
Architect: SCHMELZLE+PARTNER ARCHITEKTEN BDA, Hallwangen



SOFT QUADRA 66.7"


SOFT SQUARE

LIGHT + ACOUSTIC

Luminaires of the SATTLER SOFT-series are optionally available in the variant LIGHT + ACOUSTIC. One luminaire - two solutions. The fabric covering (fire rating B1) which acts as a light and acoustic diffusor creates a homogeneous, gentle light, and drastically reduces the reverberation time, thus creating a comfortable atmospheric environment.



SOFT SQUARE
SOFT QUADRA
LIGHT + ACOUSTIC

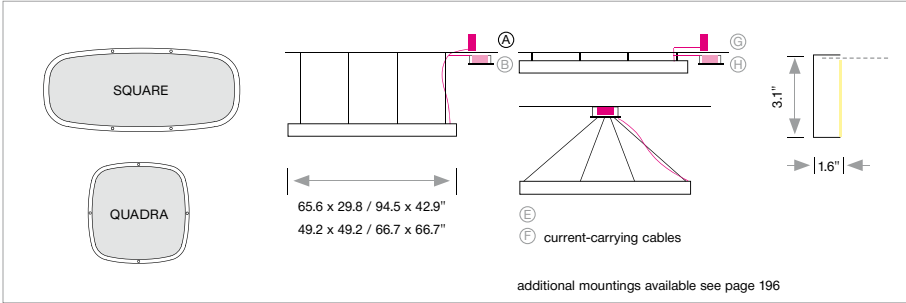


Housing:	Aluminum profile, integrated (I) acrylic cover Fabric covering (fire rating B1) as a light and acoustic diffusor				
Mounting:	Pendant light, 4 point steel cable suspension, 196.8" Power supply cable in silver, incl. external power supply unit for suspended ceiling (A)				
Lamping:	LED-technology 24V, neutralwhite 4000 K (69), CRI > 80				
Size: L x W x H inch	Watt LED	Lumen ¹	Weight ² lbs	Item No.	White
SOFT SQUARE Acousticlight					
65.6 x 29.8 x 3.1"	66	5,140	33.1	826.69.01.00.	11
94.5 x 42.9 x 3.1"	89	7,530	37.5	838.69.01.00.	11
SOFT QUADRA Acousticlight					
49.2 x 49.2 x 3.1"	68	5,220	33.1	802.69.01.00.	11
66.7 x 66.7 x 3.1"	89	7,106	37.5	814.69.01.00.	11
Optional:	LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22) LED-RGB-color control (60) Dimmable: 0-10V, 1-10V, DALI or DMX Mounting versions: B, E, F, G, H, R, S, T (page 196) Finishes: 10, 22, 27, 30, 32, 33, 35, 36, 37, 38, 40, 42, 44 (page 193) Colored power supply cable (page 194) Remote control, Bluetooth				
Design:	SATTLER				

For technical information, see specification sheet: inter-lux.com/sattler



Architect: HOK Los Angeles
Photo: Eric Laignel

CIRCOLO[®]

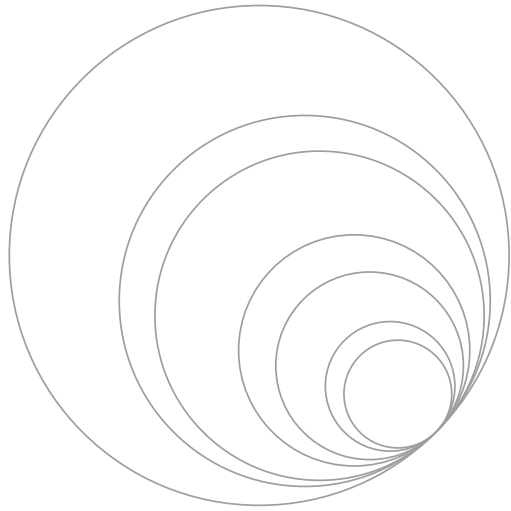


$$k = \{X \in E \mid |\overline{MX}| = r\}.$$

The combination of the circular archetype, the simple expression of infinity and the luminous power of light, was the inspiration for the development of the CIRCOLO.

AWARDS



CIRCOLO®




CIRCOLO Ø 90.6"

Project: WIGMORE STREET 105
Paul Nulty Lighting Design / Campbell Architects, London



CIRCOLO®

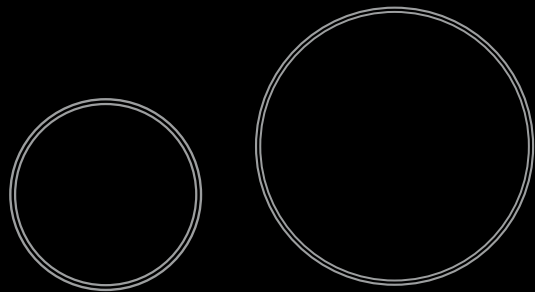


CIRCOLO Ø 102.4"

CIRCOLO Ø 137.8"

Project: Karl Köhler GmbH, Wittfoht Architekten, Stuttgart
Photo: Brigida González



CIRCOLO®



CIRCOLO
Ø 137.8"
Ø 102.4"
Ø 90.6" + Acoustic film

CIRCOLO INVERSE
Ø 90.6"

Project: Thoraxklinik Heidelberg
Architect: Arcass Planungsgesellschaft mbH, Stuttgart
Photo: Dietmar Strauß, Besigheim




CIRCOLO®

Universität der Künste Berlin
Photo: Ulrich Schwarz, Berlin



CIRCOLO[®]




CIRCOLO

Ø 90.6"
Ø 63"
Ø 52"
3/4 Circle


Project: Kreissparkasse Simmern
Architekten Wendling, Kastellaun
Ingenieurbüro Hartmann mbH, Bell
Noll Werkstätten GmbH, Fachbach/Lahn



CIRCOLO[®]

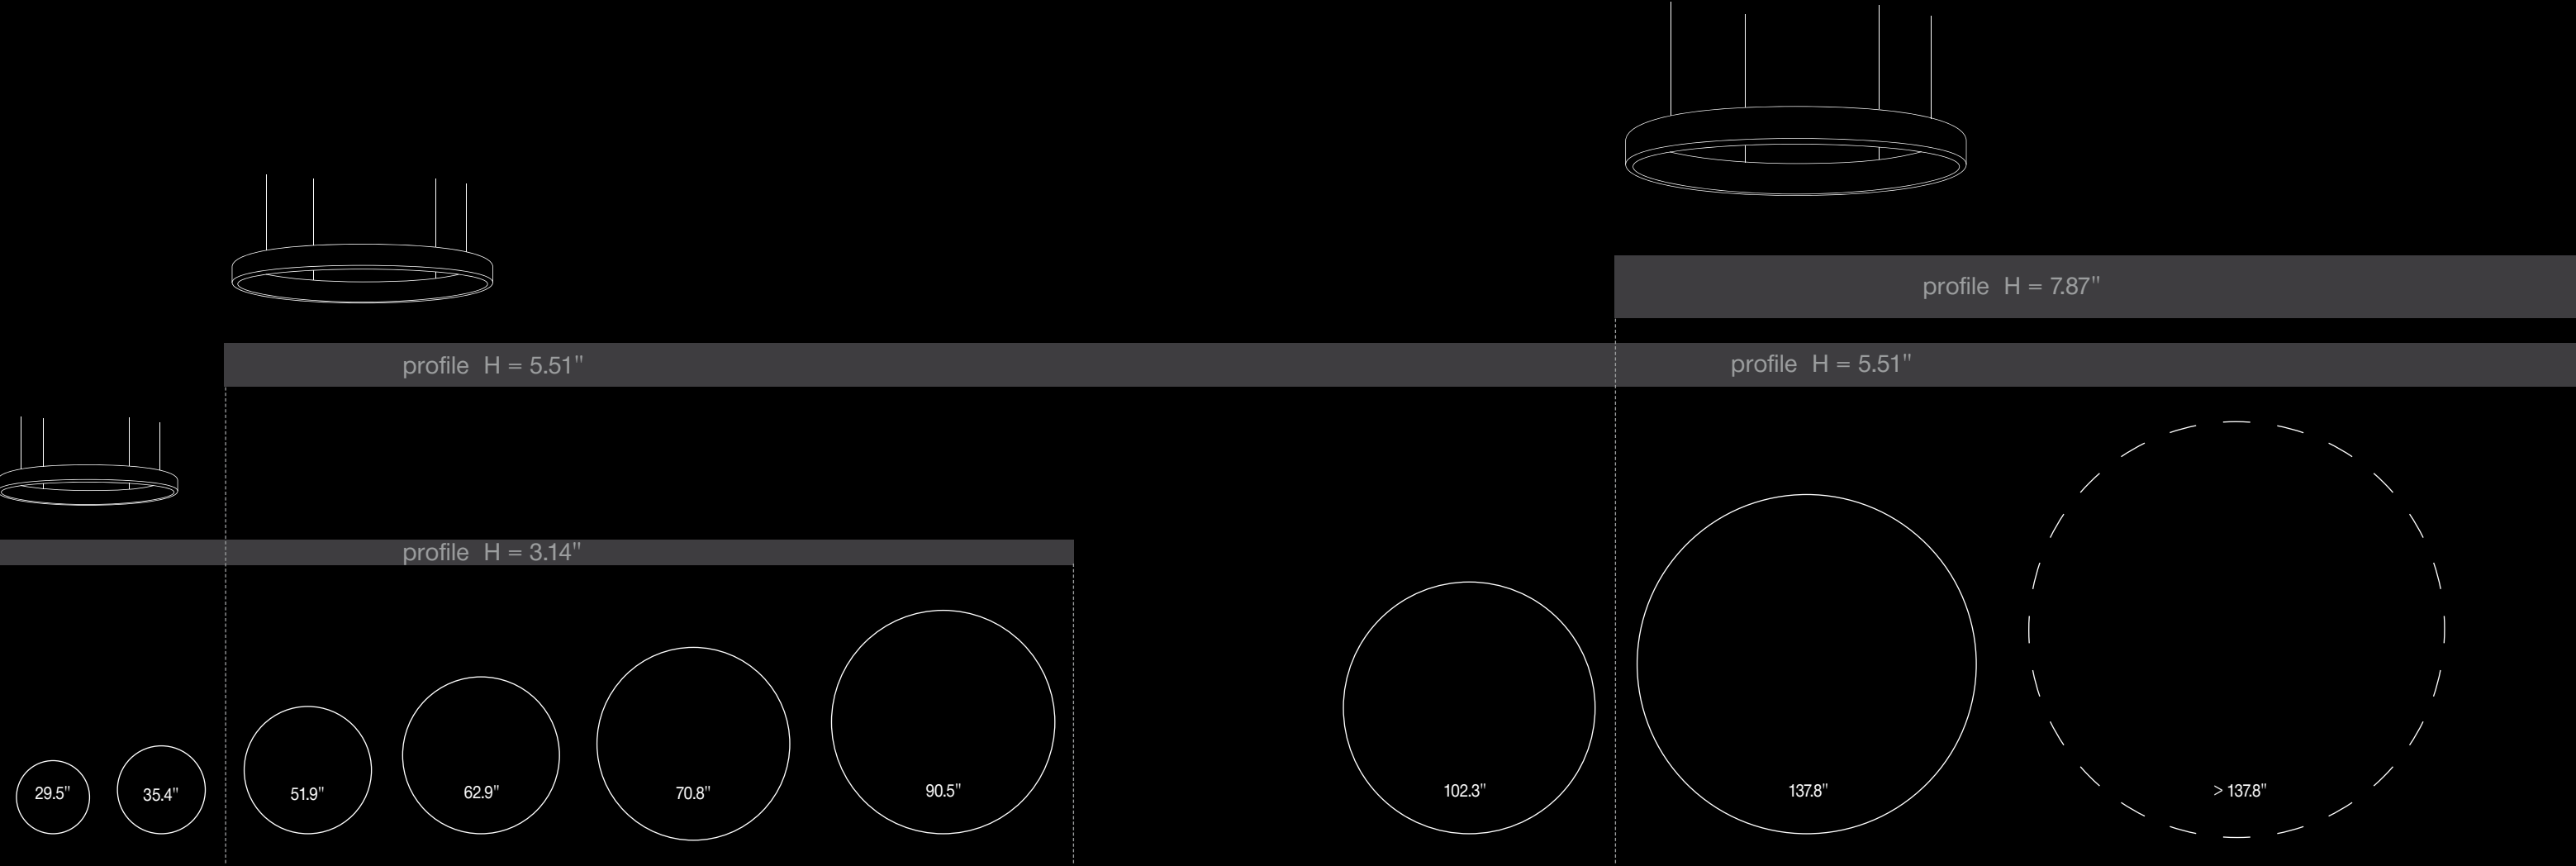

CIRCOLO®

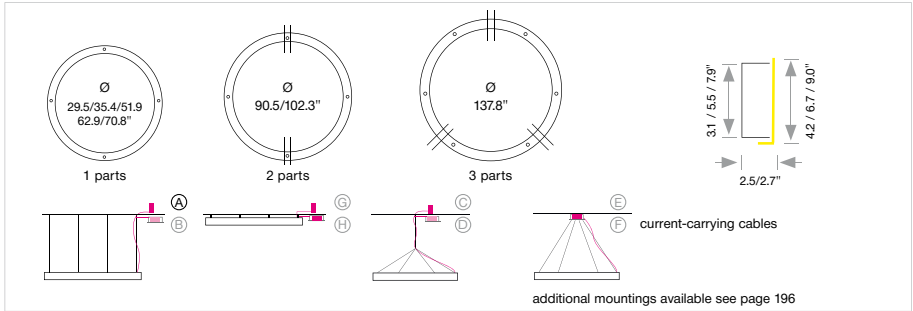


Housing: Circular aluminum profile, opal L-shaped acrylic ring on the inside
Mounting: Pendant lamp, 4/6-point suspension, steel cable 196.8"
Power supply cable silver, incl. external power supply unit for suspended ceiling (A)
Lamping: LED-technology, neutralwhite 4000 K (69), CRI > 80

Size: Ø x H x B inch	Watt LED	Lumen¹	Weight² lbs	Item No.	White
Ø 29.5 H 4.2 B 2.5"	36	3,109	17.6	228.69.01.00.	11
Ø 35.4 H 4.2 B 2.5"	44	3,767	22.0	229.69.01.00.	11
Ø 51.9 H 4.2 / 6.7 B 2.7"	63	5,620	44.0	230.69.01.00.	11
Ø 62.9 H 4.2 / 6.7 B 2.7"	77	6,010	55.1	231.69.01.00.	11
Ø 70.8 H 4.2 / 6.7 B 2.7"	86	8,351	66.0	238.69.01.00.	11
Ø 90.5 H 4.2 / 6.7 B 2.7"	110	10,711	77.2	232.69.01.00.	11
Ø 102.3 H 6.7 B 2.7"	124	10,876	88.0	234.69.01.00.	11
Ø 137.8 H 6.7 / 9.0" B 2.7"	166	15,952	117.0	235.69.01.00.	11

Optional: LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22)
LED-RGB-color control (60)
Dimmable: 0-10V, 1-10V, DALI or DMX
Mounting versions: B, C, D, E, F, G, H, R, S, T (page 196)
Finishes: 10, 22, 27, 30, 32, 33, 35, 36, 37, 38, 40, 42 (page 194)
Colored power supply cable (page 193)
Remote control, Bluetooth

Design: SATTLER

For technical information, see specification sheet: inter-lux.com/sattler



Project: LUTHA, Finland
Delivered by Teclux OY, Helsinki



WTO Genf, wittfoht architekten, Prof. Jens Wittfoht, Stuttgart, Photo: Brigida González



Private Health Club München, Brückner Innenarchitekten, München



Bank Vontobel AG, Zürich, Lighting Design: Mettler + Partner Licht AG



Augustiner Kloster Erfurt, Junk & Reich Planungsgesellschaft bmH, Weimar



Thoraxklinik Heidelberg, Architect: Arcass Planungsgesellschaft mbH, Stuttgart
Photo: Dietmar Strauß, Besigheim




WIGMORE STREET 105, London, Campbell Architects, Paul Nulty Lighting Design




Uzin Utz, Neu-Ulm, rupf. innenarchitektur gmbh, baur lichtplanung gmbh, Photo: Katrin Stollhans/Baur

ELLIPSE
ELLIPSE half-shell

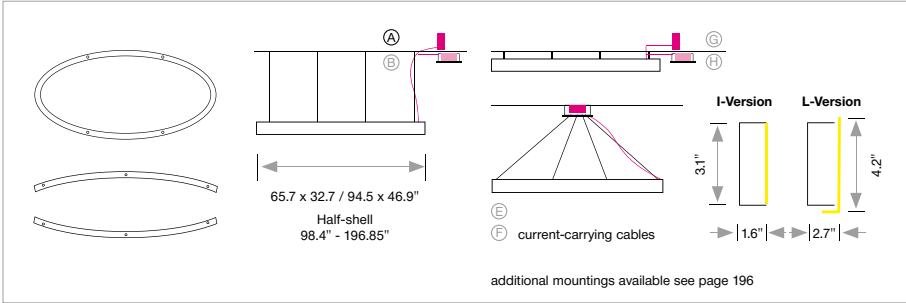


Housing:	Aluminum profile, integrated (I) or L-shaped (L) acrylic cover					
Mounting:	Pendant light, 4-point steel cable suspension 196.8"					
	Power supply cable in silver, incl. external power supply unit for suspended ceiling (A)					
	Half-shell suspended on 6 steel cables					
	Power supply cable to external power supply unit located at the end of each half-shell (A)					
Lamping:	LED-technology 24V, neutralwhite 4000 K (69), CRI > 80					
Size: L x W x H inch	Watt	Lumen ¹ LED	Weight ² lbs	Item No.	White	
ELLIPSE				I-Version		
65.7 x 32.7"	62	4,990	37.5	873.69.01.00.	11	
94.5 x 46.9"	88	7,358	39.7	885.69.01.00.	11	
ELLIPSE				L-Version		
65.7 x 32.7"	62	5,383	37.5	872.69.01.00.	11	
94.5 x 46.9"	88	7,939	39.7	884.69.01.00.	11	
ELLIPSE half-shell				L-Version		
98.4 H 3.1 / 4.3"	84	6,917	37.5	240.69.01.00.	11	
Optional:	LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22) LED-RGB-color control (60) Dimmable: 0-10V, 1-10V, DALI or DMX Mounting versions: B, E, F, G, H, R, S, T / Half-shell B, G, H (page 196) Finishes: 10, 22, 27, 30, 32, 33, 35, 36, 37, 38, 40, 42, 44 (page 193) Colored power supply cable (page 194) Remote control, Bluetooth					
Design:	SATTLER					

For technical information, see specification sheet: inter-lux.com/sattler



CIRCOLO ellipse with special canopy.
65.7 x 32.7 / 94.5 x 46.9"

ELLIPSE
LIGHT + ACOUSTIC

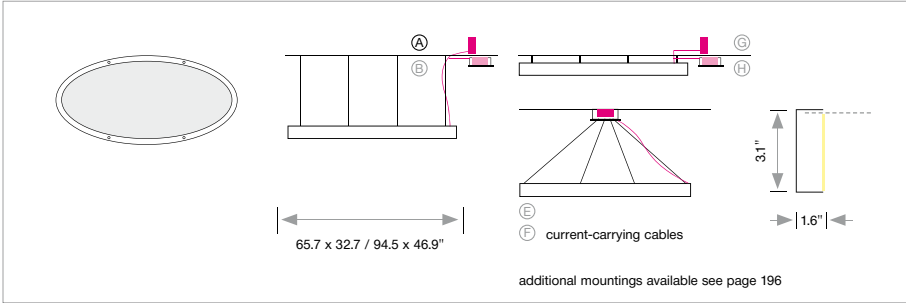

Housing:	Aluminum profile, inserted (I) acrylic cover on the inside Fabric covering (fire rating B1) as a light and acoustic diffusor					
Mounting:	Pendant light, 4-point steel cable suspension 196.8" Power supply cable in silver, incl. external power supply unit for suspended ceiling (A)					
Lamping:	LED-technology 24V, neutral-white 4000 K (69), CRI > 80					
Size: L x W x H inch	Watt	Lumen ¹ LED	Weight ² lbs	Item No.	White	
65.7 x 32.7 x 3.1"	62	4,792	37.5	874.69.01.00.	11	
94.5 x 46.9 x 3.1"	88	7,097	39.7	886.69.01.00.	11	
Optional:	LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22) LED-RGB-color control (60) Dimmable: 0-10V, 1-10V, DALI, or DMX Mounting versions: B, E, F, G, H, R, S, T (page 196) Finishes: 10, 22, 27, 30, 32, 33, 35, 36, 37, 38, 40, 42, 44 (page 193) Colored power supply cable (page 194) Remote control, Bluetooth					
Design:	SATTLER					

For technical information, see specification sheet: inter-lux.com/sattler

4000 K
(69)

IP 20

F

III

CE


optional: 48 Bluetooth

tunable white
2700-6500K (65)

RGB



CIRCOLO INVERSE



CIRCOLO INVERSE Ø 52"

Project: SEB Investment GmbH, Frankfurt
Frankfurt Westhafen - Pier Relaunch
Schneider + Schumacher
Photo: Barbara Burg | Oliver Schuh, Palladium Photodesign, Köln



CIRCOLO INVERSE


Pendant light, based on state-of-the-art LED-technology, with exterior acrylic glass frame for homogeneous and large-area illumination.



SALLE DES ABEILLES, Genf, Architect: LUCIFERO, Chêne-Bourg



CIRCOLO INVERSE




CIRCOLO INVERSE Ø 102.4"
CIRCOLO Ø 102.4"
CIRCOLO Ø 102.4" Installation

Project: IHK Duisburg, Kohl:Fromme Architekten
Photo: Wibke Evert,



CIRCOLO INVERSE

CIRCOLO
INVERSE

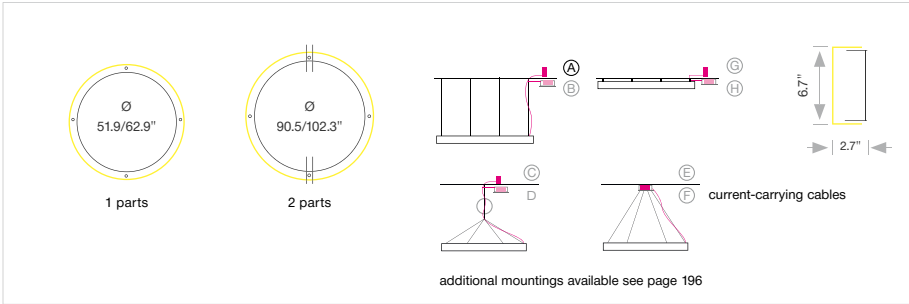

Housing:	Circular aluminum profile, opal acrylic ring on the outside				
Mounting:	Pendant lamp, 4-point suspension, steel cable 196.8" Power supply cable in silver, incl. external power supply unit for suspended ceiling (A)				
Lamping:	LED-technology, neutralwhite 4000 K (69), CRI > 80				
Size: Ø x H x B inch	Watt LED	Lumen ¹	Weight ² lbs	Item No.	White
Ø 51.9 x H 6.7 x B 2.7"	63	5,898	44.0	265.69.01.00.	11
Ø 62.9 x H 6.7 x B 2.7"	77	7,165	55.1	266.69.01.00.	11
Ø 90.5 x H 6.7 x B 2.7"	110	10,976	77.1	267.69.01.00.	11
Ø 102.3 x H 6.7 x B 2.7"	124	9,803	78.1	268.69.01.00.	11

Optional:

LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22)
LED-RGB-color control (60)
Dimmable: 0-10V, 1-10V, DALI or DMX
Mounting versions: B, C, D, E, F, G, H, S, T (page 196)
Finishes: 10, 27, 32, 33, 35, 36, 37, 38, 40, 42 (page 193)
Colored power supply cable (page 194)
Remote control, Bluetooth

Design:

SATTLER

For technical information, see specification sheet: inter-lux.com/sattler

4000 K (69)

IP 20

F

III

CE


optional:

40 Bluetooth

tunable white 2700-6500K (65)

RGB

profile H = 5.51"

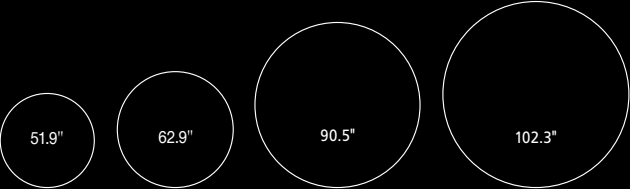





ANELLO

Pendant or wall light with special film for homogeneous and large-area illumination. Optionally available with RGB color control as backlighting.

AWARDS

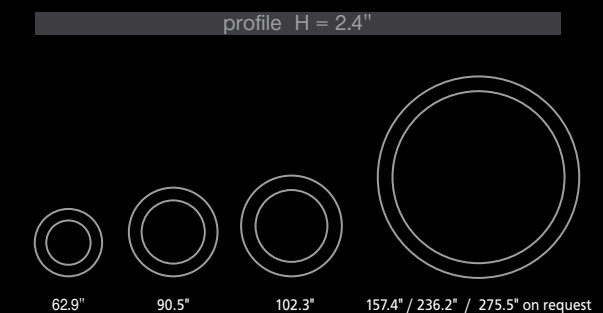

ANELLO




ANELLO Ø 63",
Special design

Project: Residenz München, Bronzesäle
Architekturbüro RFHT, München. Photo: Sattler






ANELLO




ANELLO Ø 158"

Project: Kreissparkasse Ludwigsburg
Planner: Architekturbüro Bauer und Danner
Photo: Sattler

ANELLO



ANELLO Ø 63"




ANELLO Ø 236.2"

Project: MÜNZING Chemie, Abstatt
müller.architekten, Heilbronn
Photo: Mohring



ANELLO



ANELLO in special color


Project: MÜNZING Chemie, Abstatt
müller.architekten, Heilbronn
Photo: Mohring





Project: Bank Augsburg,
Architect: Interior design office Kolb,
Stadtbergen

ANELLO

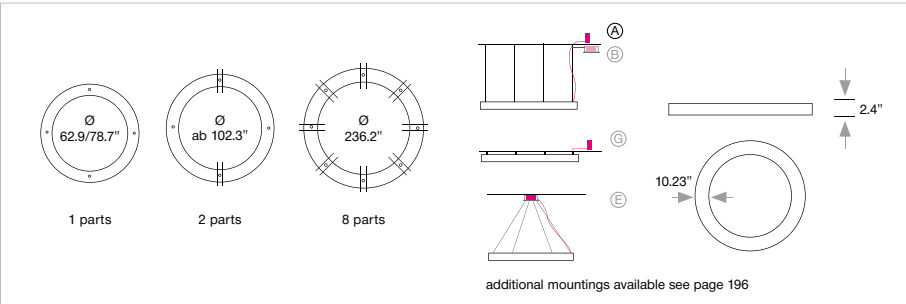

Housing:	Circular aluminum-profile with translucent film, direct light distribution				
Mounting:	Pendant light, incl. 4/8 point steel cable suspension 196.8" Power supply cable in silver, incl. external power supply unit for suspended ceiling (A)				
Lamping:	LED-technology, neutralwhite 4000 K (69), CRI > 80				
Size: Ø x H inch	Watt	Lumen ¹ LED	Weight ² lbs	Item No.	White
Ø 62.9" H 2.4"	264	14,150	44	288.69.01.00.	11
Ø 78.7" H 2.4"	351	22,773	55	290.69.01.00.	11
Ø 102.3" H 2.4"	444	28,007	77	292.69.01.00.	11
Ø 157.5, 236.2, 275.6"	1235	74,100		on request	
Optional:	LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22) LED-RGB-color control (60) Dimmable: DMX, 1-10V, 0-10V or DALI Mounting versions: B, E, G (page196) Finishes: 10, 27, 30, 32, 33, 35, 36, 37, 38 (page 193) Colored power supply cable (page194) Remote control, Bluetooth				
Design:	SATTLER				

For technical information, see specification sheet: inter-lux.com/sattler

4000 K
(69)

IP 20

F

III

EEMark

CE

optional:

Bluetooth

RGB



Project: Residenz München, Bronzesäle
Architekturbüro RFHT, München. Photo: Sattler

LUCE VERDE


Our LUCE VERDE series provides a glimpse of nature and an atmosphere of well-being due to its structural surface, the luscious green and the natural feel of the moss integrated in the delicate LED ring luminaires. The moss material by art aqua is durable and doesn't need to be maintained. With their gentle softness and characteristic tactile feel, these large-dimensioned luminaires speak to all our senses and simultaneously improve the room acoustics.



LUCE VERDE ANELLO



LUCE VERDE
ANELLO

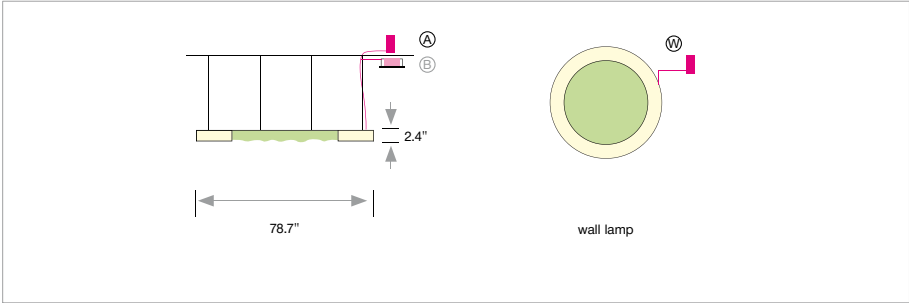

Housing:	Circular aluminum-profile with translucent film, direct light distribution, Inner surface made of dried moss Pendant light full-scale lighting, wall lamp from the outside inwards slightly decreasing illumination				
Mounting:	Pendant light, incl. 4 steel cable suspensions 196.8" Power supply cable in silver (A) Wall lamp with wall brackets. Incl. external power supply unit for intermediate ceiling (W)				
Lamping:	LED-technology 24V, neutralwhite 4000 K (69), CRI > 90				
Size: Ø x H inch	Watt	Lumen¹ LED	Weight² lbs	Item No.	White
LUCE VERDE ANELLO					
Ø 78.7" H 2.4"	352	22,773	48.5	291.69.01.00.	11
LUCE VERDE ANELLO WALL					
Ø 78.7" H 2.4"	89	6,658	48.5	287.69.01.00.	11
Optional:	LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22) Dimmable: DMX, 1-10V, 0-10V or DALI Mounting versions: B. Finishes: 30 (page 193) Colored power supply cable (page 194) Remote control, Bluetooth				
Design:	SATTLER				




For technical information, see specification sheet: inter-lux.com/sattler

4000 K
(69)

optional:



LUCE VERDE
SLIM

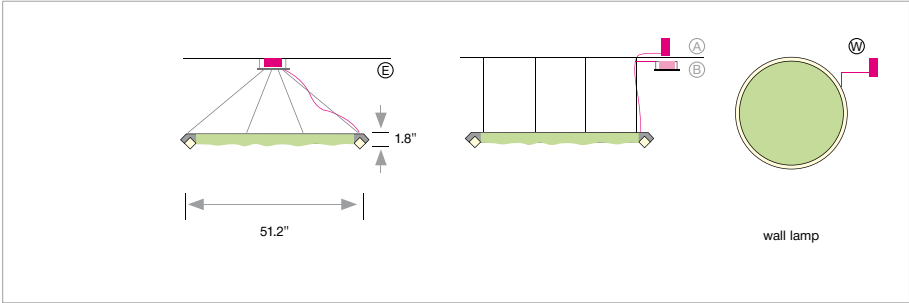

Housing:	Circular aluminum-profile with integrated acrylic, direct light distribution, Inner surface made of dried moss				
Mounting:	Pendant light, incl. 4 steel cable suspensions 196.8" Power supply cable silver (E). Wall lamp with wall brackets. Incl. external power supply unit for suspended ceiling (W)				
Lamping:	LED-technology 24V, neutralwhite 4000 K (69), CRI > 90				
Size: Ø x H inch	Watt	Lumen¹ LED	Weight² lbs	Item No.	White
LUCE VERDE SLIM					
Ø 51.2 H 1.8"	72	3,314	77.1	790.69.01.00.	11
LUCE VERDE SLIM WALL					
Ø 51.2 H 1.8"	72	3,314	77.1	791.69.01.00.	11
Optional:	LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22) Dimmable: DMX, 1-10V, 0-10V or DALI Mounting versions: A, B (page 196) Finishes: 30 (page 193) Colored power supply cable (page 194) Remote control, Bluetooth				
Design:	SATTLER				

For technical information, see specification sheet: inter-lux.com/sattler

4000 K
(69)

IP 20

F

III


CE

optional:

48 Bluetooth

For effective illumination of the dried moss we recommend the use of separate spotlights.

HIGHMOON
FLAT

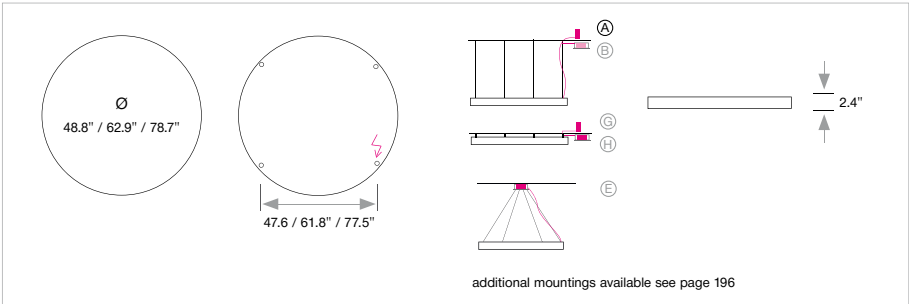

Housing: Circular aluminum housing with translucent film, direct light distribution.
Mounting: Pendant installation with 4-point adjustable steel cable suspension, 196.8" Power supply cable in silver. Incl. external power supply unit for suspended ceiling, **A** Level of illumination slightly decreasing towards centre
Lamping: LED-technology 24V, neutralwhite 4000 K (69), CRI > 80

Size: Ø x H inch	Watt LED	Lumen ¹	Weight ² lbs	Item No.	White
Ø 48.1 H 2.4"	88	6,597	13.2	274.69.01.00.	11
Ø 62.9 H 2.4"	116	9,237	17.6	278.69.01.00.	11
Ø 78.7 H 2.4"	144	10,905	24.2	280.69.01.00.	11

Optional: LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22)
Dimmable: DMX, 1-10V, 0-10V or DALI
Mounting versions: B, C, E, S, G, H (page 196)
Finishes: 10, 22, 27, 30, 32, 33, 35, 36, 37, 38, 40, 42 (page 193)
Colored power supply cable (page 194)
Remote control, Bluetooth

Design: SATTLER

For technical information, see specification sheet: inter-lux.com/sattler

4000 K (69)

IP 20

F

III


optional:

Bluetooth



Project: Kassler Bank
Architekt: ErlenRuffenArchitektur | Lichtplanung: ErlenRuffenArchitektur
Installationsplanung: Döring Beratende Ingenieure GmbH
Photo: Jens Laser

QUADRA

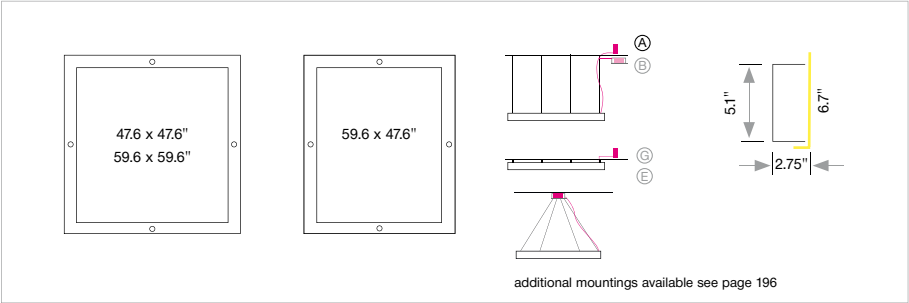

Housing:	Square aluminum housing with L-shaped acrylic cover on the inside				
Mounting:	Pendant light with 4-point steel cable suspension, 196.8" ^(A) Power supply cable in silver				
Lamping:	LED-technology, neutralwhite 4000 K (69), CRI > 80				
Size: L x W x H inch	Watt LED	Lumen ¹	Weight ² lbs	Item No.	White
47.6 x 47.6 x 6.7"	77	6,547	59.5	245.69.01.00.	11
59.6 x 59.6 x 6.7"	89	7,229	74.9	246.69.01.00.	11
59.6 x 47.6 x 6.7"	83	6,754	66.1	247.69.01.00.	11
Optional:					
LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22) LED-RGB-color control (60) Dimmable: DMX, 1-10V, 0-10V or DALI, Mounting versions: B, E, G (page 196) Finishes: 10, 22, 27, 30, 32, 33, 35, 36, 37, 38, 40, 42 (page 193) Colored power supply cable (page 194), Remote control, Bluetooth					
Design:	SATTLER				

For technical information, see specification sheet: inter-lux.com/sattler

4000 K (69)

IP 20

F

III


optional:

48 Bluetooth

tunable white 2700-6500K (65)



SKY

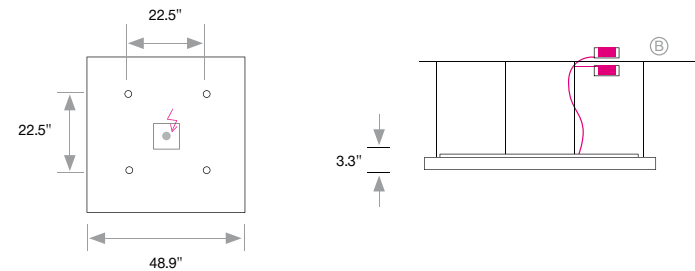


Housing:	Aluminum profile frame, powder-coated in white Bottom cover with translucent film (fire rating B1)
Mounting:	Surface-mounted or pendant with 196.8" steel cable suspension Power supply cable silver, with canopy to be placed in intermediate ceiling or direct ceiling mounting (B)
Lamping:	LED neutralwhite 4000 K (69), CRI > 90, dimmable 0-10, 1-10V

Size: L x W x H inch	Watt LED	Lumen ¹	Weight ² lbs	Item No.	White
 LED full area 48.9 x 48.9 x 3.3"	175	16,500	61.7	182.69.00.00.	11
 LED circumferential 48.9 x 48.9 x 3.3"	116	6,528	61.7	183.69.00.00	11

Optional: LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22)
Dimmable: DMX, or DALI
Remote control, Bluetooth

Design: SATTLER

For technical information, see specification sheet: inter-lux.com/sattler



ANGOLO


the origami luminaire



Origami paper-folding gave the impulse for the pendant light ANGLO, which sets accents through unorthodox shapes and angles.



ANGOLO
the origami luminaire

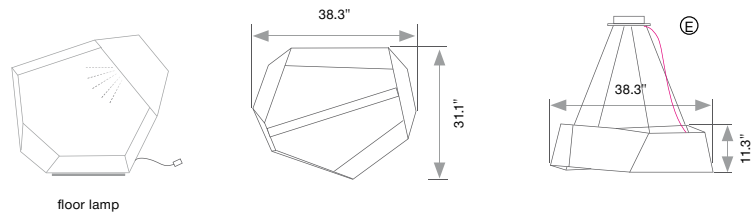

Housing: Aluminum housing, powder coated
Mounting: Pendant light (direct/indirect) with steel cable suspension 196.8" canopy (white) and red power supply cable (Z75)
Floor lamp (direct) with 78.7" power supply cable in black (Z90) and switch
Lamping: LED-technology, neutralwhite 4000 K (69), CRI > 90

Size: L x W x H inch	Watt LED	Lumen ¹	Weight ² lbs	Item No.	White
Pendant light 38.3 x 31.1 x 11.3"	14 / 7	867 / 246	30.8	700.69.04.00.	11
Floor lamp 38.3 x 31.1 x 11.3"	3	300	30.8	702.69.44.00.	11

Optional: LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22)
Pendant light dimmable: DMX, 1-10V, 0-10V or DALI
Finishes: 10 (page 193)
Colored power supply cable (page 194)
Remote control, Bluetooth

Design: MICHAEL SCHMIDT

For technical information, see specification sheet: inter-lux.com/sattler

4000 K
(69)

IP 20

F

III


CE

optional: 48 Bluetooth



ACOUSTIC
LIGHT PANEL

ACOUSTIC
PANEL

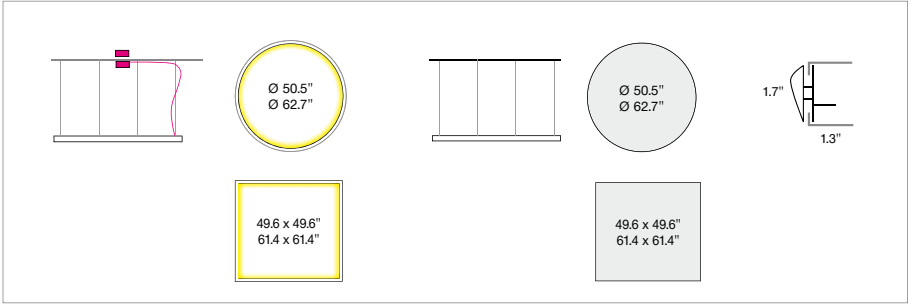


Housing: Aluminum frame with acoustic membrane
Mounting: Surface-mounted or pendant with 196.8" steel cable suspension
Power supply cable silver, with canopy to be placed in intermediate ceiling or direct ceiling mounting (B)
Lamping: LED neutralwhite 4000 K (69), CRI > 90, dimmable 0-10, 1-10V

Size: L x W x H inch	Watt LED	Lumen ¹	Weight ² lbs	Item No.	White
Acoustic Light Panel					
Ø 50.5"	72	4,314	7.7	1023.69.00.00.	12
Ø 62.7"	90	5,372	9.2	1024.69.00.00.	12
49.6 x 49.6"	120	10,673	14.3	1040.69.00.00.	12
61.4 x 61.4"	150	12,571	18.0	1041.69.00.00.	12
* Higher wattage for workplace lighting					
Acoustic Panel (without light)					
Ø 50.5"			7.7	1042.00.00.00.	12
Ø 62.7"			9.2	1043.00.00.00.	12
49.6 x 49.6"			14.3	1062.00.00.00.	12
61.4 x 61.4"			18.0	1063.00.00.00.	12


Optional: LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22)
Pendant light dimmable: DMX, 1-10V, 0-10V or DALI
Finishes: 10 (page 193)
Colored power supply cable (page 194)
Remote control, Bluetooth

Design: SATTLER

For technical information, see specification sheet: inter-lux.com/sattler



COMBINATONS & VARIATIONS

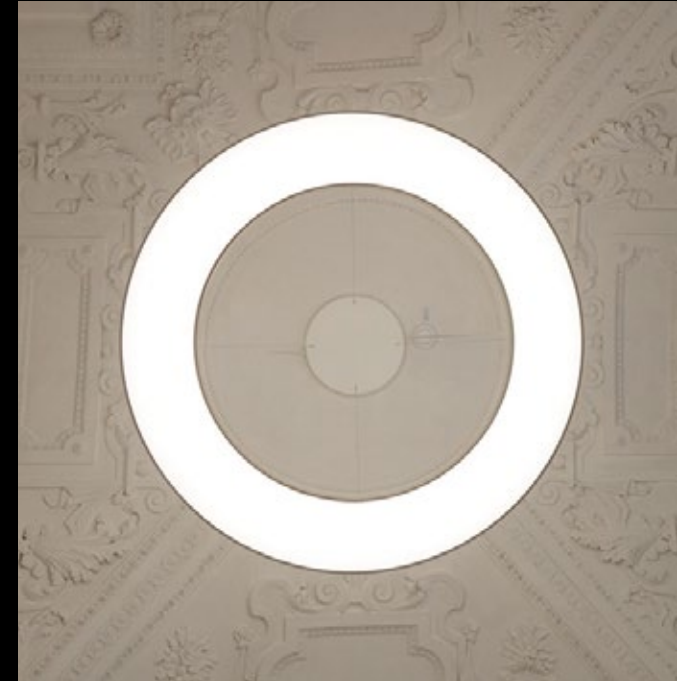



< Project: Bords de Seine 1, Paris
Photo: Burg & Schuh | Palladium Photodesign

Project: Boundary House, England >
Architect: The Orchard Group,
Harper Downie Architects




LIGHT IN NEW DIMENSIONS




Special light (62 ft) in organic form

Project: Roche, Bau 67, Basel
Architect: Nissen Wentzlaff Architekten BSA SIA AG, Basel
Photo: Ruedi Walti



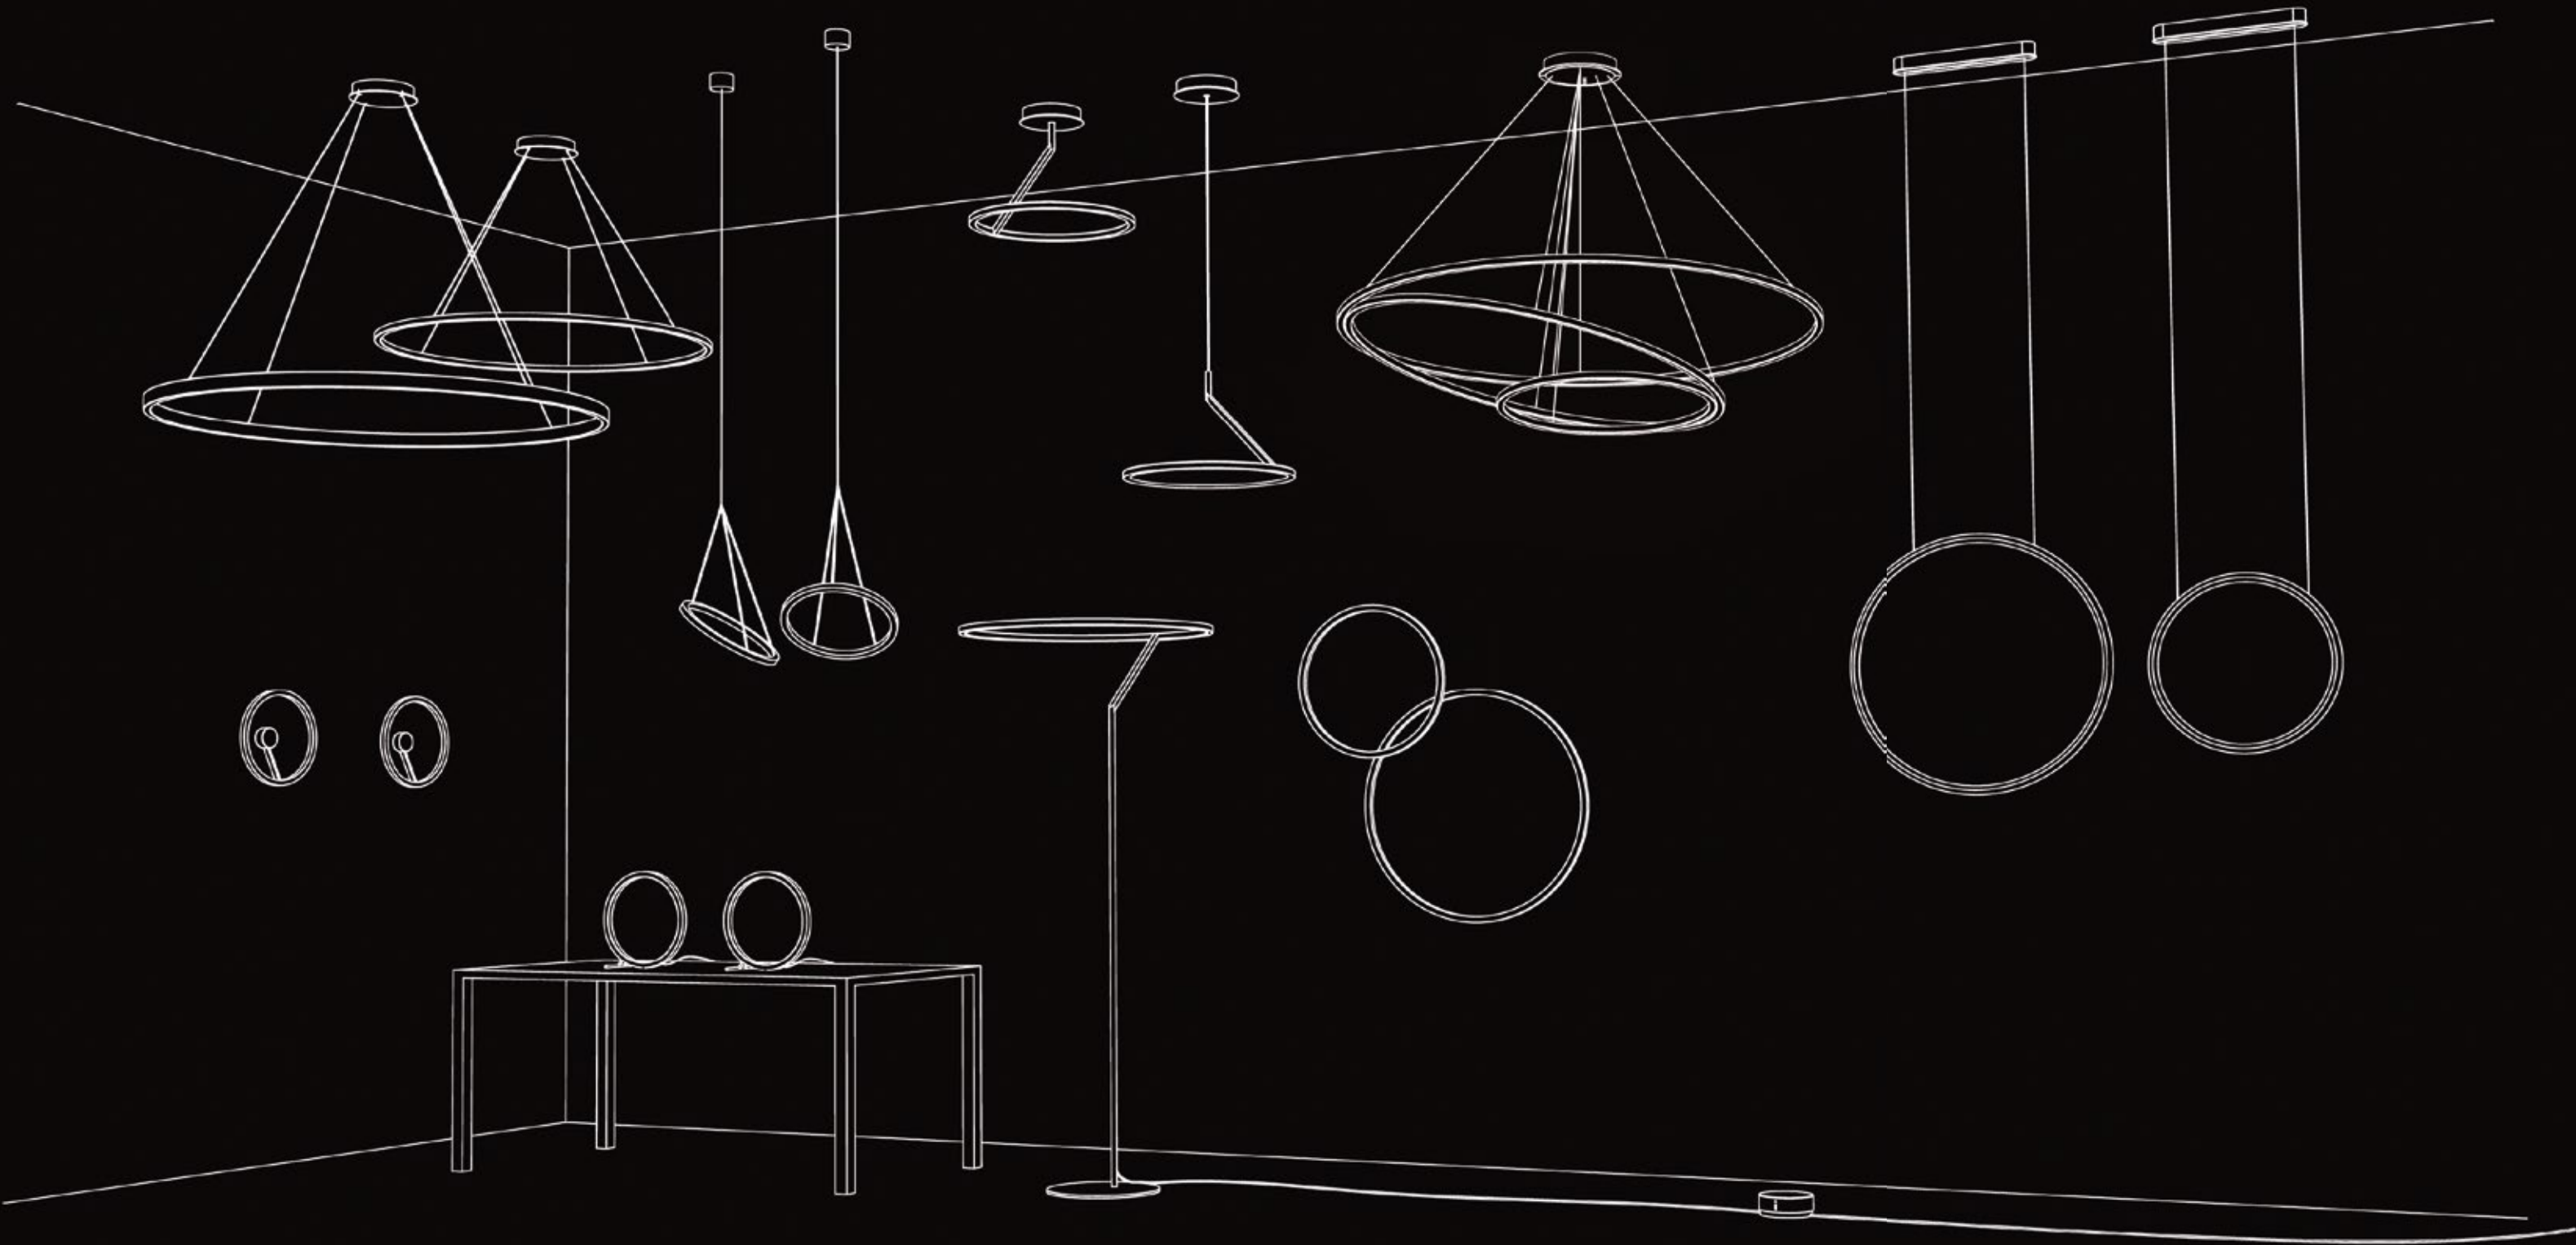

DOPPIO




Ø 48.8"

Project: Benjamin Haupt Architekten, München
Photo: Sattler



DOPPIO



Ø 74.8"
Ø 102.4"
Ø 137.8"


Project: Motel One Olympiagate, München
Photo: Sattler





Project: MÜNZING Chemie, Abstatt
müller.architekten, Heilbronn
Photo: Mohring

DOPPIO




Ø 74.8"
Ø 90.6"
Ø 137.8"

Project: Golfclub Anlage Hetzenhof GbRmbH, Lorch
Architect: Gaus & Knödler, Photo: Friedemann Rieker



DOPPIO




Ø 102.4"
direct/indirect RGB


Project: Kochschule Andrea Lange, Ludwigsburg
Architect: henger+heyn, architekten, Ludwigsburg
Photo: LipsiART digital photography, René Krause



DOPPIO

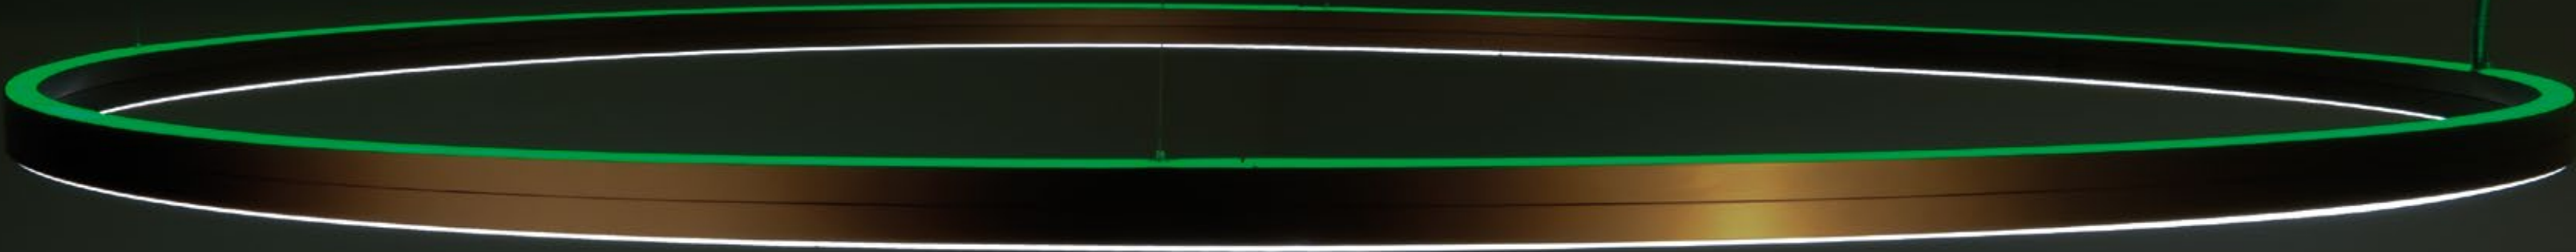

DOPPIO

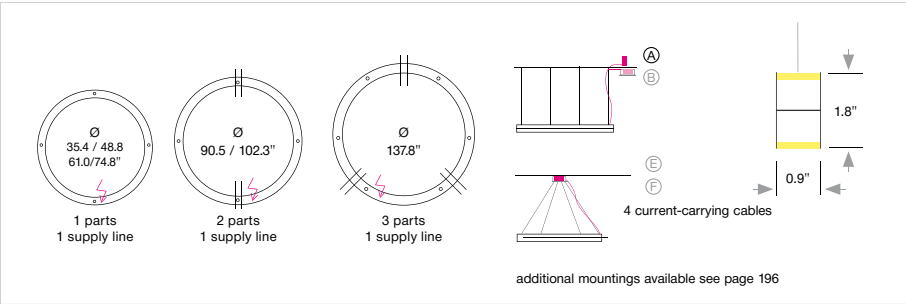


Housing: Circular aluminum profile with integrated acrylic rings
Mounting: Pendant light, inclusiv power supply unit and 4 or 6 steel cable suspensions 118" (A)
Lamping: LED-technology 24V, warmwhite 3000K (63), CRI > 90

Size: Ø inch	Watt down / up	Lumen¹ down / up	Weight² lbs	Item No.	White
DOPPIO direct					
Ø 35.4"	55	2,352	19.8	779.63.01.00.	11
Ø 48.8"	72	3,027	22.0	780.63.01.00.	11
Ø 61.0"	88	3,931	24.3	781.63.01.00.	11
Ø 74.8"	110	4,592	26.5	782.63.01.00.	11
Ø 90.5"	140	5,975	41.9	783.63.01.00.	11
Ø 102.3"	165	6,702	46.3	784.63.01.00.	11
Ø 137.8"	210	8,753	63.9	785.63.01.00.	11
DOPPIO direct/indirect					
Ø 35.4"	55 / 23	2,352 / 1,094	19.8	779.63.02.63.	11
Ø 48.8"	72 / 30	3,027 / 1,300	22.0	780.63.02.63.	11
Ø 61.0"	88 / 39	3,931 / 1,818	24.3	781.63.02.63.	11
Ø 74.8"	110 / 46	4,592 / 2,120	26.5	782.63.02.63.	11
Ø 90.5"	140 / 60	5,975 / 2,779	41.9	783.63.02.63.	11
Ø 102.3"	165 / 69	6,702 / 3,067	46.3	784.63.02.63.	11
Ø 137.8"	210 / 88	8,753 / 4,178	63.9	785.63.02.63.	11

Optional: LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200K (22)
LED-RGB-color control (60), Dimmable: DMX, 1-10V, 0-10V or DALI
Mounting versions: B, E, F, G, H, R, S, T (page 196)
Finishes: 22, 27, 30, 32, 33, 35, 36, 37, 38 (page 193)
Colored power supply cable (page 194)
Remote control, Bluetooth

Design: SATTLER



For technical information, see specification sheet: inter-lux.com/sattler

3000 K
(63)

LED

IP 20

F

E

CE

RoHS

optional:

40


Bluetooth

RGB



Project: Schloß Doberlug
Architect:
Ingenieurbüro W. Sauer & Co. GmbH

DOPPIO ELLIPSE



DOPPIO ELLIPSE 61", 86.6", 108.3"




DOPPIO ELLIPSE



DOPPIO ELLIPSE 86.6"




DOPPIO
ELLIPSE

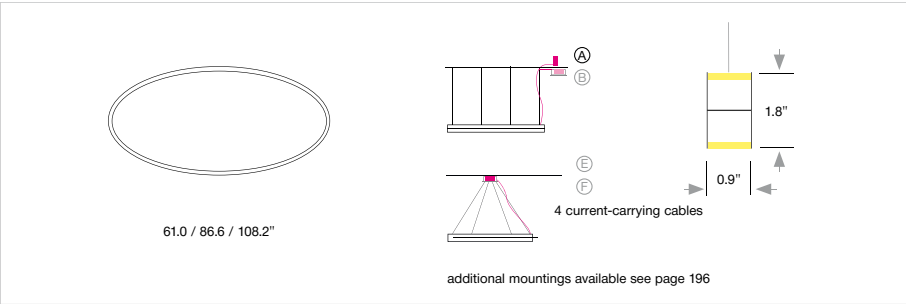


Housing:	Aluminum profile with integrated acrylic ring				
Mounting:	Pendant light, inclusiv power supply unit and 4 steel cable suspensions 118" ^(A)				
Lamping:	LED-technology 24V, warmwhite 3000K (63), CRI > 90				
Size: L x W x H inch	Watt	Lumen ¹ LED	Weight ² lbs	Item No.	White
DOPPIO ELLIPSE direct					
61.0 x 30.5 x 1.8"	70	2,550	26.4	1091.63.01.00.	11
86.6 x 35.8 x 1.8"	88	4,003	41.8	1092.63.01.00.	11
108.2 x 40.5 x 1.8"	116	4,962	48.5	1093.63.01.00.	11
DOPPIO ELLIPSE direct/indirect					
61.0 x 30.5 x 1.8"	70 / 28	2,550 / 1,297	26.4	1091.63.01.00.	11
86.6 x 35.8 x 1.8"	88 / 40	4,003 / 1,853	41.8	1092.63.01.00.	11
108.2 x 40.5 x 1.8"	116 / 50	4,962 / 2,316	48.5	1093.63.01.00.	11
Optional:	LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200K (22) LED-RGB-color control (60), Dimmable: DMX, 1-10V, 0-10V or DALI Mounting versions: B, E, F, G, H, R, S, T (page 196) Finishes: 22, 27, 30, 32, 33, 35, 36, 37, 38 (page 193) Colored power supply cable (page 194) Remote control, Bluetooth				
Design:	SATTLER				




For technical information, see specification sheet: inter-lux.com/sattler



DOPPIO LINEA



Optional:
Canopy long

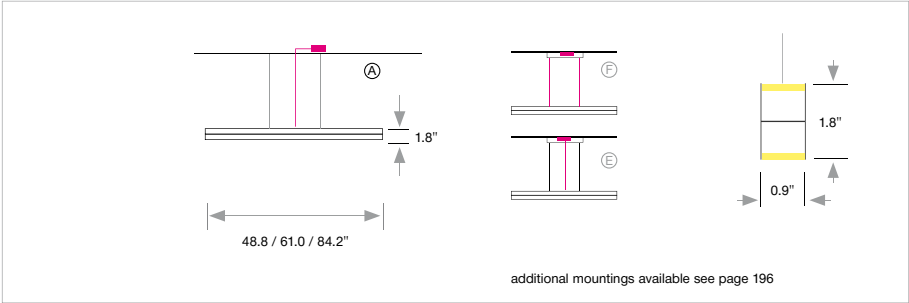

additional mountings available see page 196

Housing:	Aluminum profile with integrated acrylic, direct or direct/indirect light beam				
Mounting:	Pendant light including 2-point suspension 78.7" with power supply cable and 1 external power supply unit in suspended ceiling ^(A)				
Lamping:	LED-technology 24V, warmwhite 3000K (63)				
Size: L inch	Watt down / up	Lumen ¹ down / up	Weight ² lbs	Item No.	White
DOPPIO LINEA direct					
50.0"	23	1,197	4.8	794.63.01.00.	11
61.0"	28	1,465	5.5	795.63.01.00.	11
84.2"	39	2,016	6.6	796.63.01.00.	11
DOPPIO LINEA direct/indirect					
50.0"	23 / 11	1,197 / 451	4.8	794.63.02.63.	11
61.0"	28 / 13	1,465 / 557	5.5	795.63.02.63.	11
84.2"	39 / 18	2,016 / 759	6.6	796.63.02.63.	11
Optional:	LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200K (22) LED-RGB-color control (60), Dimmable: DMX, 1-10V, 0-10V or DALI Mounting versions: B, E, F, R (page 196) Finishes: 22, 27, 30, 32, 33, 35, 36, 37, 38 (page 193) Colored power supply cable (page 194) Remote control, Bluetooth				
Design:	SATTLER				

For technical information, see specification sheet: inter-lux.com/sattler

3000 K
(63)

LED

IP 20

F

E

CE

optional:


40

Bluetooth

RGB



MINI




Ø 74.8"

Project: OTC Office, Budapest
Photo: Burg & Schuh | Palladium Photodesign




MINI



Ø 61"
LED spot in canopy



MINI

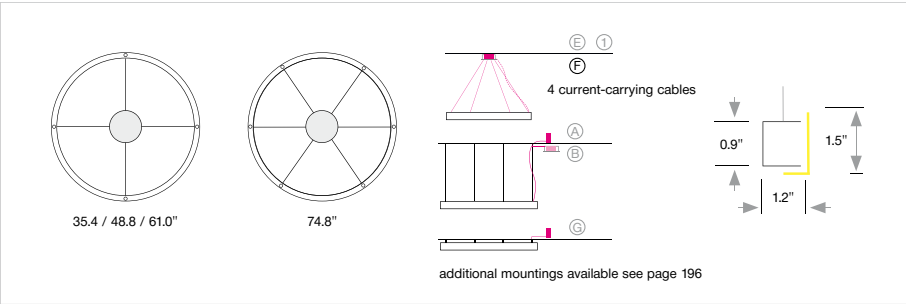

Housing:	Circular aluminum profile, opal acrylic glass ring (L-shaped) on the inside				
Mounting:	Pendant light, inclusive canopy (Ø 11.4") and 4 current-carrying steel cable suspensions* 118" (F)				
Lamping:	LED-technology 24V, warmwhite 3000K (63), CRI > 90				
Size: Ø inch	Watt LED	Lumen¹	Weight² lbs	Item No.	White
Ø 35.4"	51	2,339	8.8	742.63.01.00.	11
Ø 48.8"	71	3,175	12.1	742.63.01.00.	11
Ø 61.0"	88	4,061	13.2	744.63.01.00.	11
Ø 74.8"	108	4,888	15.4	745.63.01.00.	11
Optional:	LED Spot in canopy 4W/20°-40°, 360 Lumen 762.67.01.04. 11 LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200K (22) LED-RGB-color control (60), Dimmable: DMX, 1-10V, 0-10V or DALI Mounting versions: A, B, E, G, H, R, S, T (page 196) Finishes: 22, 27, 30, 32, 33, 35, 36, 37, 38 (page 193) Colored power supply cable (page 194) Remote control, Bluetooth				
Design:	SATTLER patented				

For technical information, see specification sheet: inter-lux.com/sattler

3000 K (63)

LED

IP 20

F

III


CE

optional:

40

Bluetooth


RGB



Ø 74.8"

Project: OTC Office, Budapest
Photo: Burg & Schuh
Palladium Photodesign

SLIM ELLIPSE

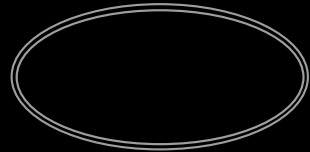


SLIM ELLIPSE
61 x 31"

Project: Kochschule Andrea Lange, Ludwigsburg
Architect: henger+heyn, architekten, Ludwigsburg
Photo: LipsiART digital photography, René Krause



SLIM
ELLIPSE

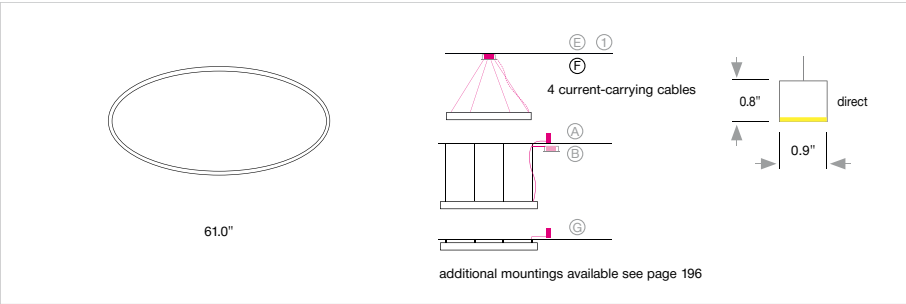

Housing:	Aluminum profile with integrated acrylic					
Mounting:	Pendant light, inclusive canopy and 4 current-carrying steel cable suspensions* 118" (F)					
Lamping:	LED-technology 24V, warmwhite 3000K (63), CRI > 90					
Size: L x W x H inch	Watt	Lumen ¹ LED	Weight ² lbs	Item No.	White	
61.0 x 30.5 x 0.9"	70	3,009	13.2	738.63.44.00.	11	
Optional:	LED Spot in canopy 4W/20°-40°, 360 Lumen 762.67.01.04. 11 LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200K (22) LED-RGB-color control (60), Dimmable: DMX, 1-10V, 0-10V or DALI Mounting versions: B, E, F, G, H, R, S, T (page 196) Finishes: 22, 27, 30, 32, 33, 35, 36, 37, 38 (page 193) Colored power supply cable (page 194) Remote control, Bluetooth					
Design:	SATTLER					

For technical information, see specification sheet: inter-lux.com/sattler

3000 K
(63)

LED

IP 20


F

optional:

RGB



SLIM




Ø 61"

Design by Global
distributed by Hugo Neumann for Belgium
Photo: © Marc Detiffe



SLIM




Ø 74.8"

Project: madness GmbH, Göppingen
Projektentwicklung u. Baubetreuung:
Rönsch Bau GmbH, Kirchheim



SLIM




Ø 74.8"

Architect: architekturraum studio, Dreieich



SLIM




Ø 35.4"
Ø 48.8"
Ø 61"
Ø 74.8"

Project: Lohmann & Rauscher GmbH & Co. KG
Academy Rengsdorf. Planner: Pro Office GmbH
Photo: GAULS-DIE-FOTOGRAFEN



SLIM


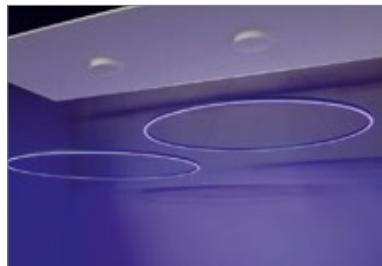


SLIM with RGB color control




Project: Osborne Clarke, internationale Kanzlei, Hamburg
Architect: Arctum Architekten GmbH | Einrichtung: GOP, Abteilung Büroeinrichtung SHARP Business Systems Deutschland, Köln

SLIM

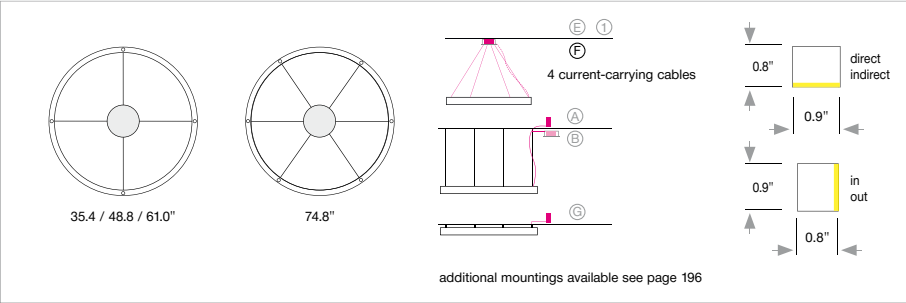

Housing:	Aluminum profile with integrated acrylic					
Mounting:	Pendant light, inclusive canopy and 4 current-carrying steel cable suspensions* 118" (F)					
Lamping:	LED-technology 24V, warmwhite 3000K (63), CRI > 90					
Size: Ø inch	Watt LED	Lumen¹	Weight² lbs	Item No.		White
CIRCOLO SLIM				INDIRECT		DIRECT
Ø 35.4"	55	2,574	7.7	705.63.01.00.	711.63.01.00.	11
Ø 48.8"	72	3,296	11.0	706.63.01.00.	712.63.01.00.	11
Ø 61.0"	88	3,597	12.1	707.63.01.00.	713.63.01.00.	11
Ø 74.8"	110	5,123	13.2	708.63.01.00.	714.63.01.00.	11
CIRCOLO SLIM				IN		OUT
Ø 35.4"	51	2,993	7.7	717.63.01.00.	723.63.01.00.	11
Ø 48.8"	71	4,062	11.0	718.63.01.00.	724.63.01.00.	11
Ø 61.0"	88	5,144	12.1	719.63.01.00.	725.63.01.00.	11
Ø 74.8"	108	6,270	13.2	720.63.01.00.	726.63.01.00.	11
Optional:	LED Spot in canopy 4W/20°-40°, 360 Lumen			762.67.01.04.	11	
	LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200K (22)					
	LED-RGB-color control (60), Dimmable: DMX, 1-10V, 0-10V or DALI					
	Mounting versions: B, E, F, G, H, R, S, T (page 196)					
	Finishes: 22, 27, 30, 32, 33, 35, 36, 37, 38 (page 193)					
	Colored power supply cable (page 194)					
	Remote control, Bluetooth					
Design:	SATTLER					

For technical information, see specification sheet: inter-lux.com/sattler



Shop concept



Project: VR-Bank Mittelbaden, Planer: ZHK Gruppe, Pic. Oliver Hurst



Project: Forum Helsinki, TECLUX




Project: Bar MOËT im LE MÉRIDIAN, Wien Lichtplaner: Christian Ploderer



Project: Osborne Clarke, Hamburg Arctum Architekten GmbH

GIRATA

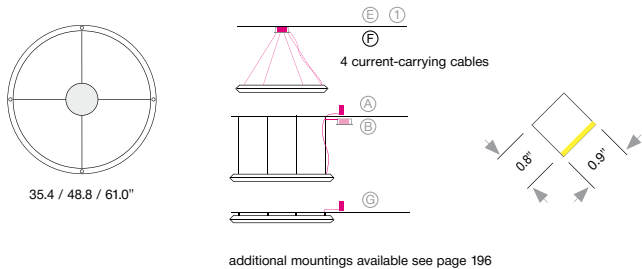

Housing: Aluminum profile with integrated acrylic
Mounting: Pendant light, inclusive canopy and 4 current-carrying steel cable suspensions* 118" (F) ① US-version with separat power supply cable (E)
Lamping: LED-technology 24V, warmwhite 3000K (63), CRI > 90

Size: Ø inch	Watt LED	Lumen¹	Weight² lbs	Item No.	White
GIRATA HORIZONTAL					
Ø 23.6"	33	1,530	6.6	895.63.01.00.	11
Ø 35.4"	55	2,486	7.7	896.63.01.00.	11
Ø 48.8"	72	3,314	11.0	897.63.01.00.	11
Ø 61.0"	88	4,060	12.1	898.63.01.00.	11

Optional: LED Spot in canopy 4W/20°-40°, 360 Lumen 762.67.01.04. 11
LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200K (22)
Dimmable: DMX, 1-10V, 0-10V or DALI
Mounting versions: A, B, E, G, R, S, T (page 196)
Finishes: 22, 27, 30, 32, 33, 35, 36, 37, 38 (page 193)
Colored power supply cable (page 194)
Remote control, Bluetooth

Design: MARKUS BISCHOF

For technical information, see specification sheet: inter-lux.com/sattler

3000 K
(63)

LED

IP 20

F

III

CE


optional:

40

Bluetooth



GIRATA
VERTICAL

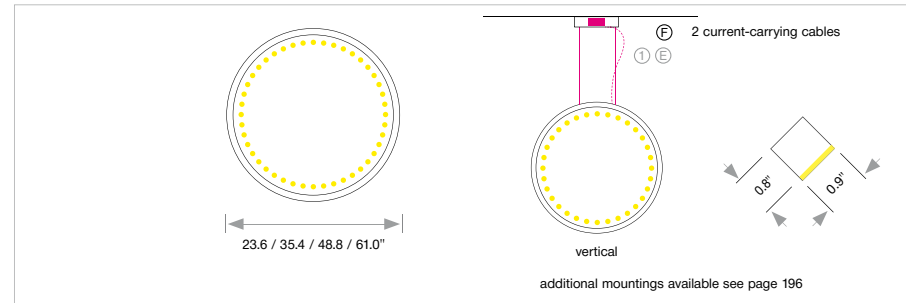


Housing:	Circular aluminum profile with integrated acrylic
Mounting:	Pendant light, inclusive canopy and 2 current-carrying steel cable suspensions* 118" (F)
Lamping:	LED-technology 24V, warmwhite 3000K (63), CRI > 90

Size: Ø inch	Watt LED	Lumen ¹	Weight ² lbs	Item No.	White
GIRATA VERTIKAL					
Ø 23.6"	33	1,530	6.6	901.63.01.00.	11
Ø 35.4"	55	2,486	7.7	902.63.01.00.	11
Ø 48.8"	72	3,314	11.0	903.63.01.00.	11
Ø 61.0"	88	4,060	12.1	904.63.01.00.	11


Optional: LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200K (22).
LED-RGB-color control (60), Dimmable: DMX, 1-10V, 0-10V or DALI
Mounting versions: A, E, R (page 196)
Finishes: 22, 27, 30, 32, 33, 35, 36, 37, 38 (page 193)
Colored power supply cable (page 194)
Remote control, Bluetooth

Design: MARKUS BISCHOF


For technical information, see specification sheet: inter-lux.com/sattler



Canopy long

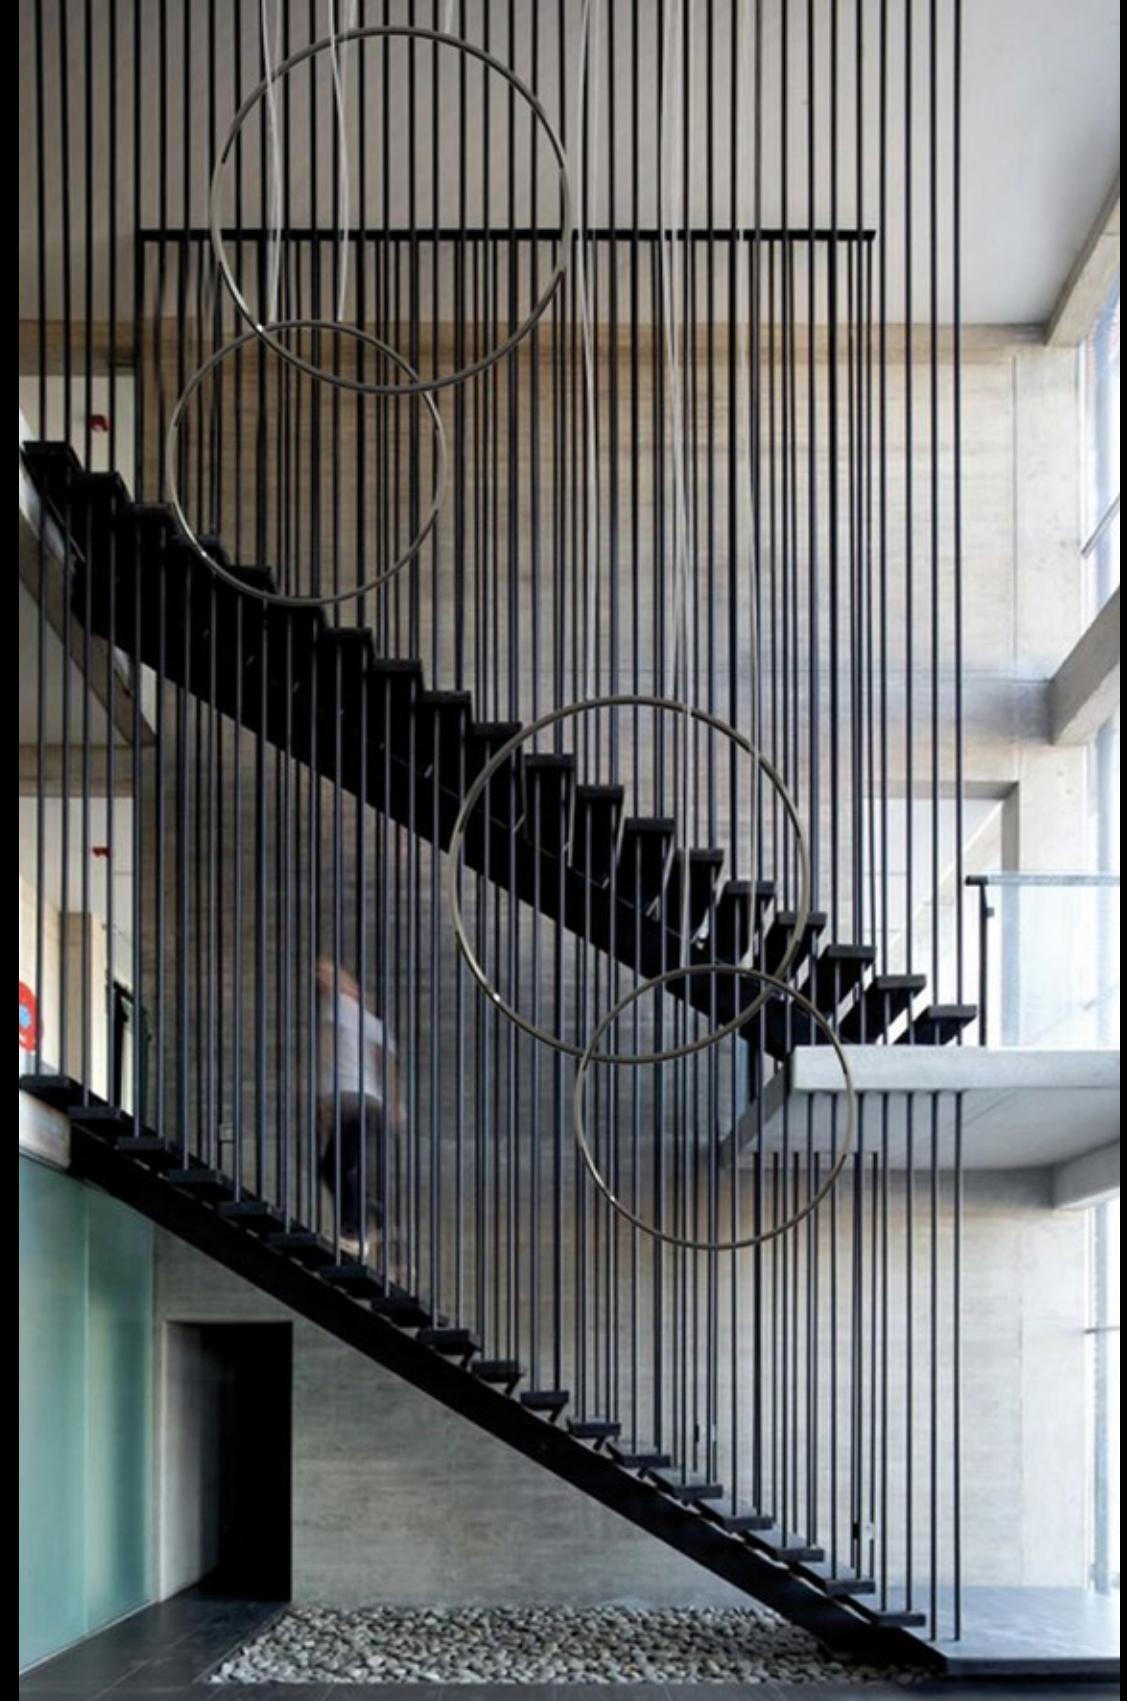


TRIS

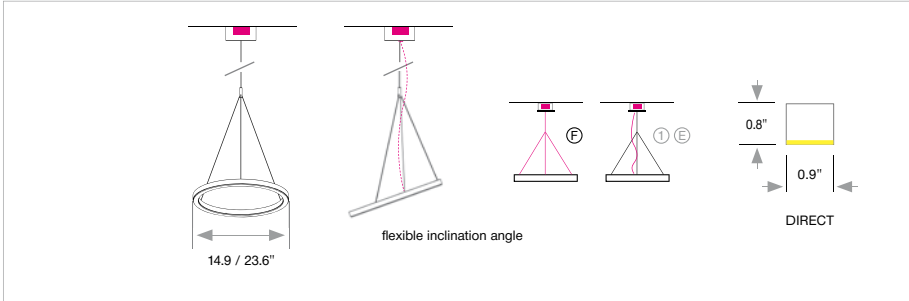


Housing:	Circular aluminum profile, with integrated acrylic glass ring, direct light distribution				
Mounting:	Pendant light, inclusive canopy (Ø 5.2") and 3 current-carrying steel cable suspensions* 78.7" (F)				
Lamping:	LED-technology 24V, warmwhite 3000K (63), CRI > 90				
Size: Ø inch	Watt LED	Lumen ¹	Weight ² lbs	Item No.	White
Ø 14.9"	22	1,021	5.5	582.63.01.00.	11
Ø 23.6"	33	1,768	6.6	583.63.01.00.	11
Optional:					
LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200K (22)					
Dimmable: DMX, 1-10V, 0-10V					
Finishes: 30, 32, 33, 35, 36, 37, 38, 39 (page 193)					
Remote control, Bluetooth					
Design:	JÜRGEN BECKERT				

For technical information, see specification sheet: inter-lux.com/sattler



INSOSPESO
CEILING

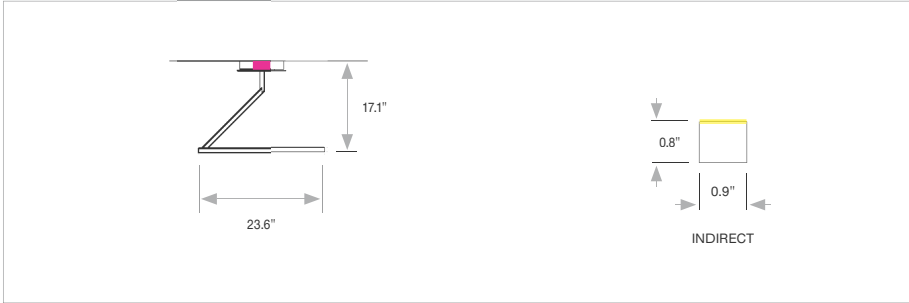

Housing: Circular aluminum profile with integrated acrylic glass cover, indirect light distribution
Mounting: Ceiling light, inclusive canopy (Ø 8.3")
Lamping: LED-technology 24V, warmwhite 3000K (63), CRI > 90

Size: Ø inch	Watt LED	Lumen¹	Weight² lbs	Item No.	White
Ø 23.6"	33	1,557	6.6	593.63.01.00.	11

Optional: LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200K (22)
Dimmable: DMX, 1-10V, 0-10V, DALI
Finishes: 22, 27, 30, 32, 33, 35, 36, 37, 38 (page 193)
Remote control, Bluetooth

Design: JÜRGEN BECKERT

For technical information, see specification sheet: inter-lux.com/sattler

3000 K
(63)

LED


IP 20

CE

optional:

40 Bluetooth

INSOSPESO
PENDANT

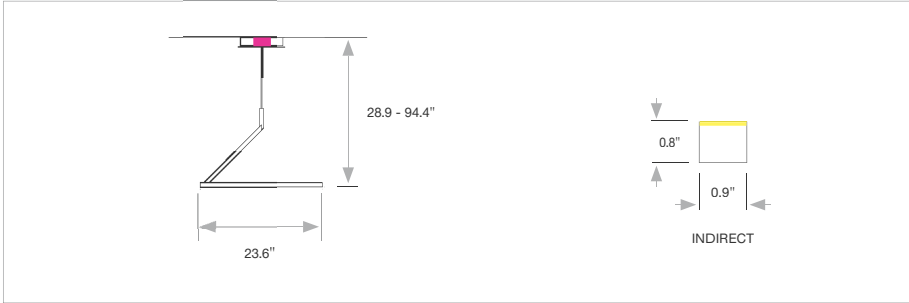

Housing:	Circular aluminum profile with integrated acrylic glass cover, indirect light distribution				
Mounting:	Pendant light including canopy (Ø 8.3") and suspension 78.7"				
Lamping:	LED-technology 24V, warmwhite 3000K (63), CRI > 90				
Size: Ø inch	Watt LED	Lumen¹	Weight² lbs	Item No.	White
Insospeso Pendant					
Ø 23.6"	33	1,557	6.6	595.63.01.00.	11
Optional: LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200 (22) Dimmable: DMX, 1-10V, 0-10V, DALI Finishes: 22, 27, 30, 32, 33, 35, 36, 37, 38 (page 193) Remote control, Bluetooth					
Design:	JÜRGEN BECKERT				

For technical information, see specification sheet: inter-lux.com/sattler

3000 K
(63)

LED

IP 20

F

III

ENEC


CE

optional:

Bluetooth



INSOSPESO
WALL

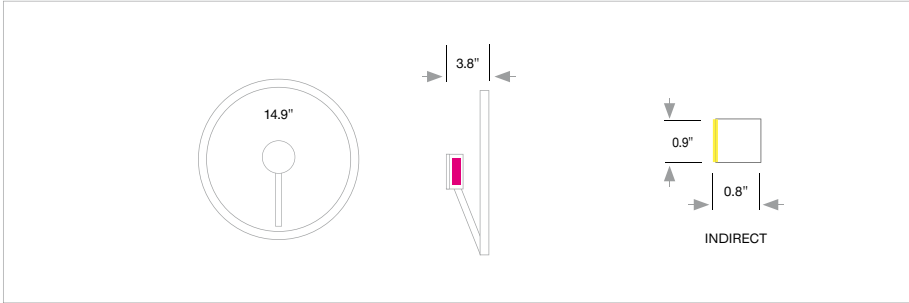


Housing:	Aluminum profile with integrated acrylic glass cover				
Mounting:	Wall light including junction box				
Lamping:	LED-technology 24V, warmwhite 3000K (63), CRI > 90				
Size: Ø inch	Watt LED	Lumen¹	Weight² lbs	Item No.	White
Ø 14.9"	9	639	2.2	735.63.01.00.	11
Optional: LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200 (22) Finishes: 22, 27, 30, 32, 33, 35, 36, 37, 38 (page 193)					
Design:	MARKUS BISCHOF				

For technical information, see specification sheet: inter-lux.com/sattler

3000 K (63)	LED	IP 20	F	III		CE	optional:	4000 K (69)	2700 K (61)	2200 K (22)
-------------	-----	-------	---	-----	--	----	-----------	-------------	-------------	-------------



SLIM WALL

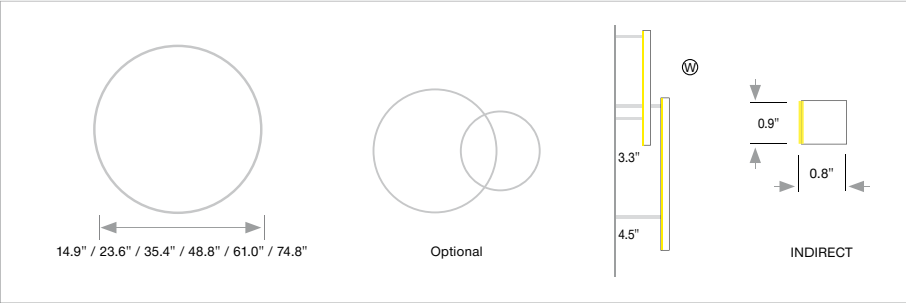

Housing:	Wall lamp indirect light distribution Circular aluminum profile with integrated acrylic glass				
Mounting:	Wall light, inclusive wall bracket 3.3" and built-in socket, 59" cable and wall plug transformer including connection plug 				
Lamping:	LED-technology 24V, warmwhite 3000K (63), CRI 90				
Size: Ø inch	Watt LED	Lumen ¹	Weight ² lbs	Item No.	White
Ø 14.9"	9	456	2.2	727.63.01.00.	11
Ø 23.6"	14	789	2.2	728.63.01.00.	11
Ø 23.6"	23	1,149	3.3	729.63.01.00.	11
Ø 23.6"	30	1,347	5.5	730.63.01.00.	11
Ø 23.6"	39	1,905	6.6	731.63.01.00.	11
Ø 23.6"	46	2,289	7.7	732.63.01.00.	11
Optional:	LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200 (22) Dimmable: DMX, 1-10V, 0-10V or DALI Finishes: 22, 27, 30, 32, 33, 35, 36, 37, 38 (page 193) Remote control, Bluetooth Wall bracket 4.5" for overlapping installation Remote power supply unit for intermediate ceiling				
Design:	SATTLER				

For technical information, see specification sheet: inter-lux.com/sattler

3000 K (63)

LED



IP 20



F



III







optional:

40 Bluetooth

4000 K (69)

2700 K (61)

2200 K (22)






Slim Wall Ø 23.6 , Ø 35.4 , Ø 48.8"

Project: Wohnhaus Karlsruhe
Planner: Licht- Center Speyer. Photo: Sattler

TOCCATA





TOCCATA



Project: architect@work, Rotterdam



TOCCATA

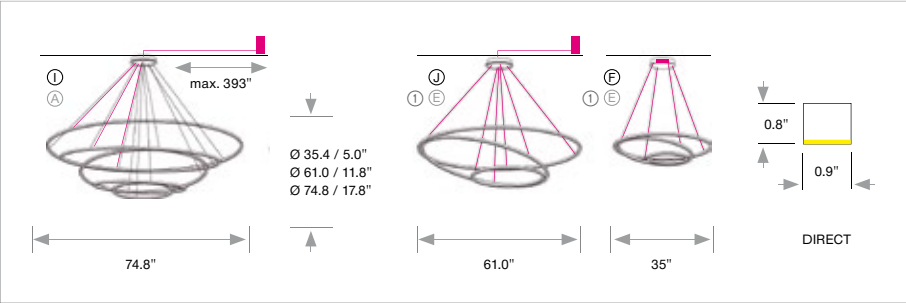

Housing:	Pendant light direct light distribution, 3/5 parts aluminum profile, with integrated acrylic cover				
Mounting:	Ø 35.4" canopy (Ø 9.5"), 4 current-carrying steel cable suspensions (F) Ø 61" canopy, 7 current-carrying steel cable suspensions (E) Ø 74.8" remote power supply unit, 14 steel cable suspension, 3 power supply cables 196.8" length (A)				
Lamping:	LED-technology 24V, warmwhite 3000K (63), CRI > 90				
Size: Ø inch	Watt LED	Lumen¹	Weight² lbs	Item No.	White
Ø 35.4"	85	4,056	17.6	777.63.01.00.	11
Ø 61.0"	147	7,010	24.2	771.63.01.00.	11
Ø 74.8"	256	12,177	30.8	773.63.01.00.	11
Optional:	LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200K (22) Dimmable: DMX, 1-10V, 0-10V or DALI Mounting versions: A (page 196) Finishes: 22, 27, 30, 32, 33, 35, 36, 37, 38, 39, 40, 42 (page 193) Remote control: Bluetooth				
Design:	MARKUS BISCHOF				


For technical information, see specification sheet: inter-lux.com/sattler

3000 K (63) LED IP 20 F III

optional: 40 Bluetooth




INSIEME




Ø 74.8"

Project: madness GmbH, Göppingen
Projektentwicklung u. Baubetreuung:
Rönsch Bau GmbH, Kirchheim

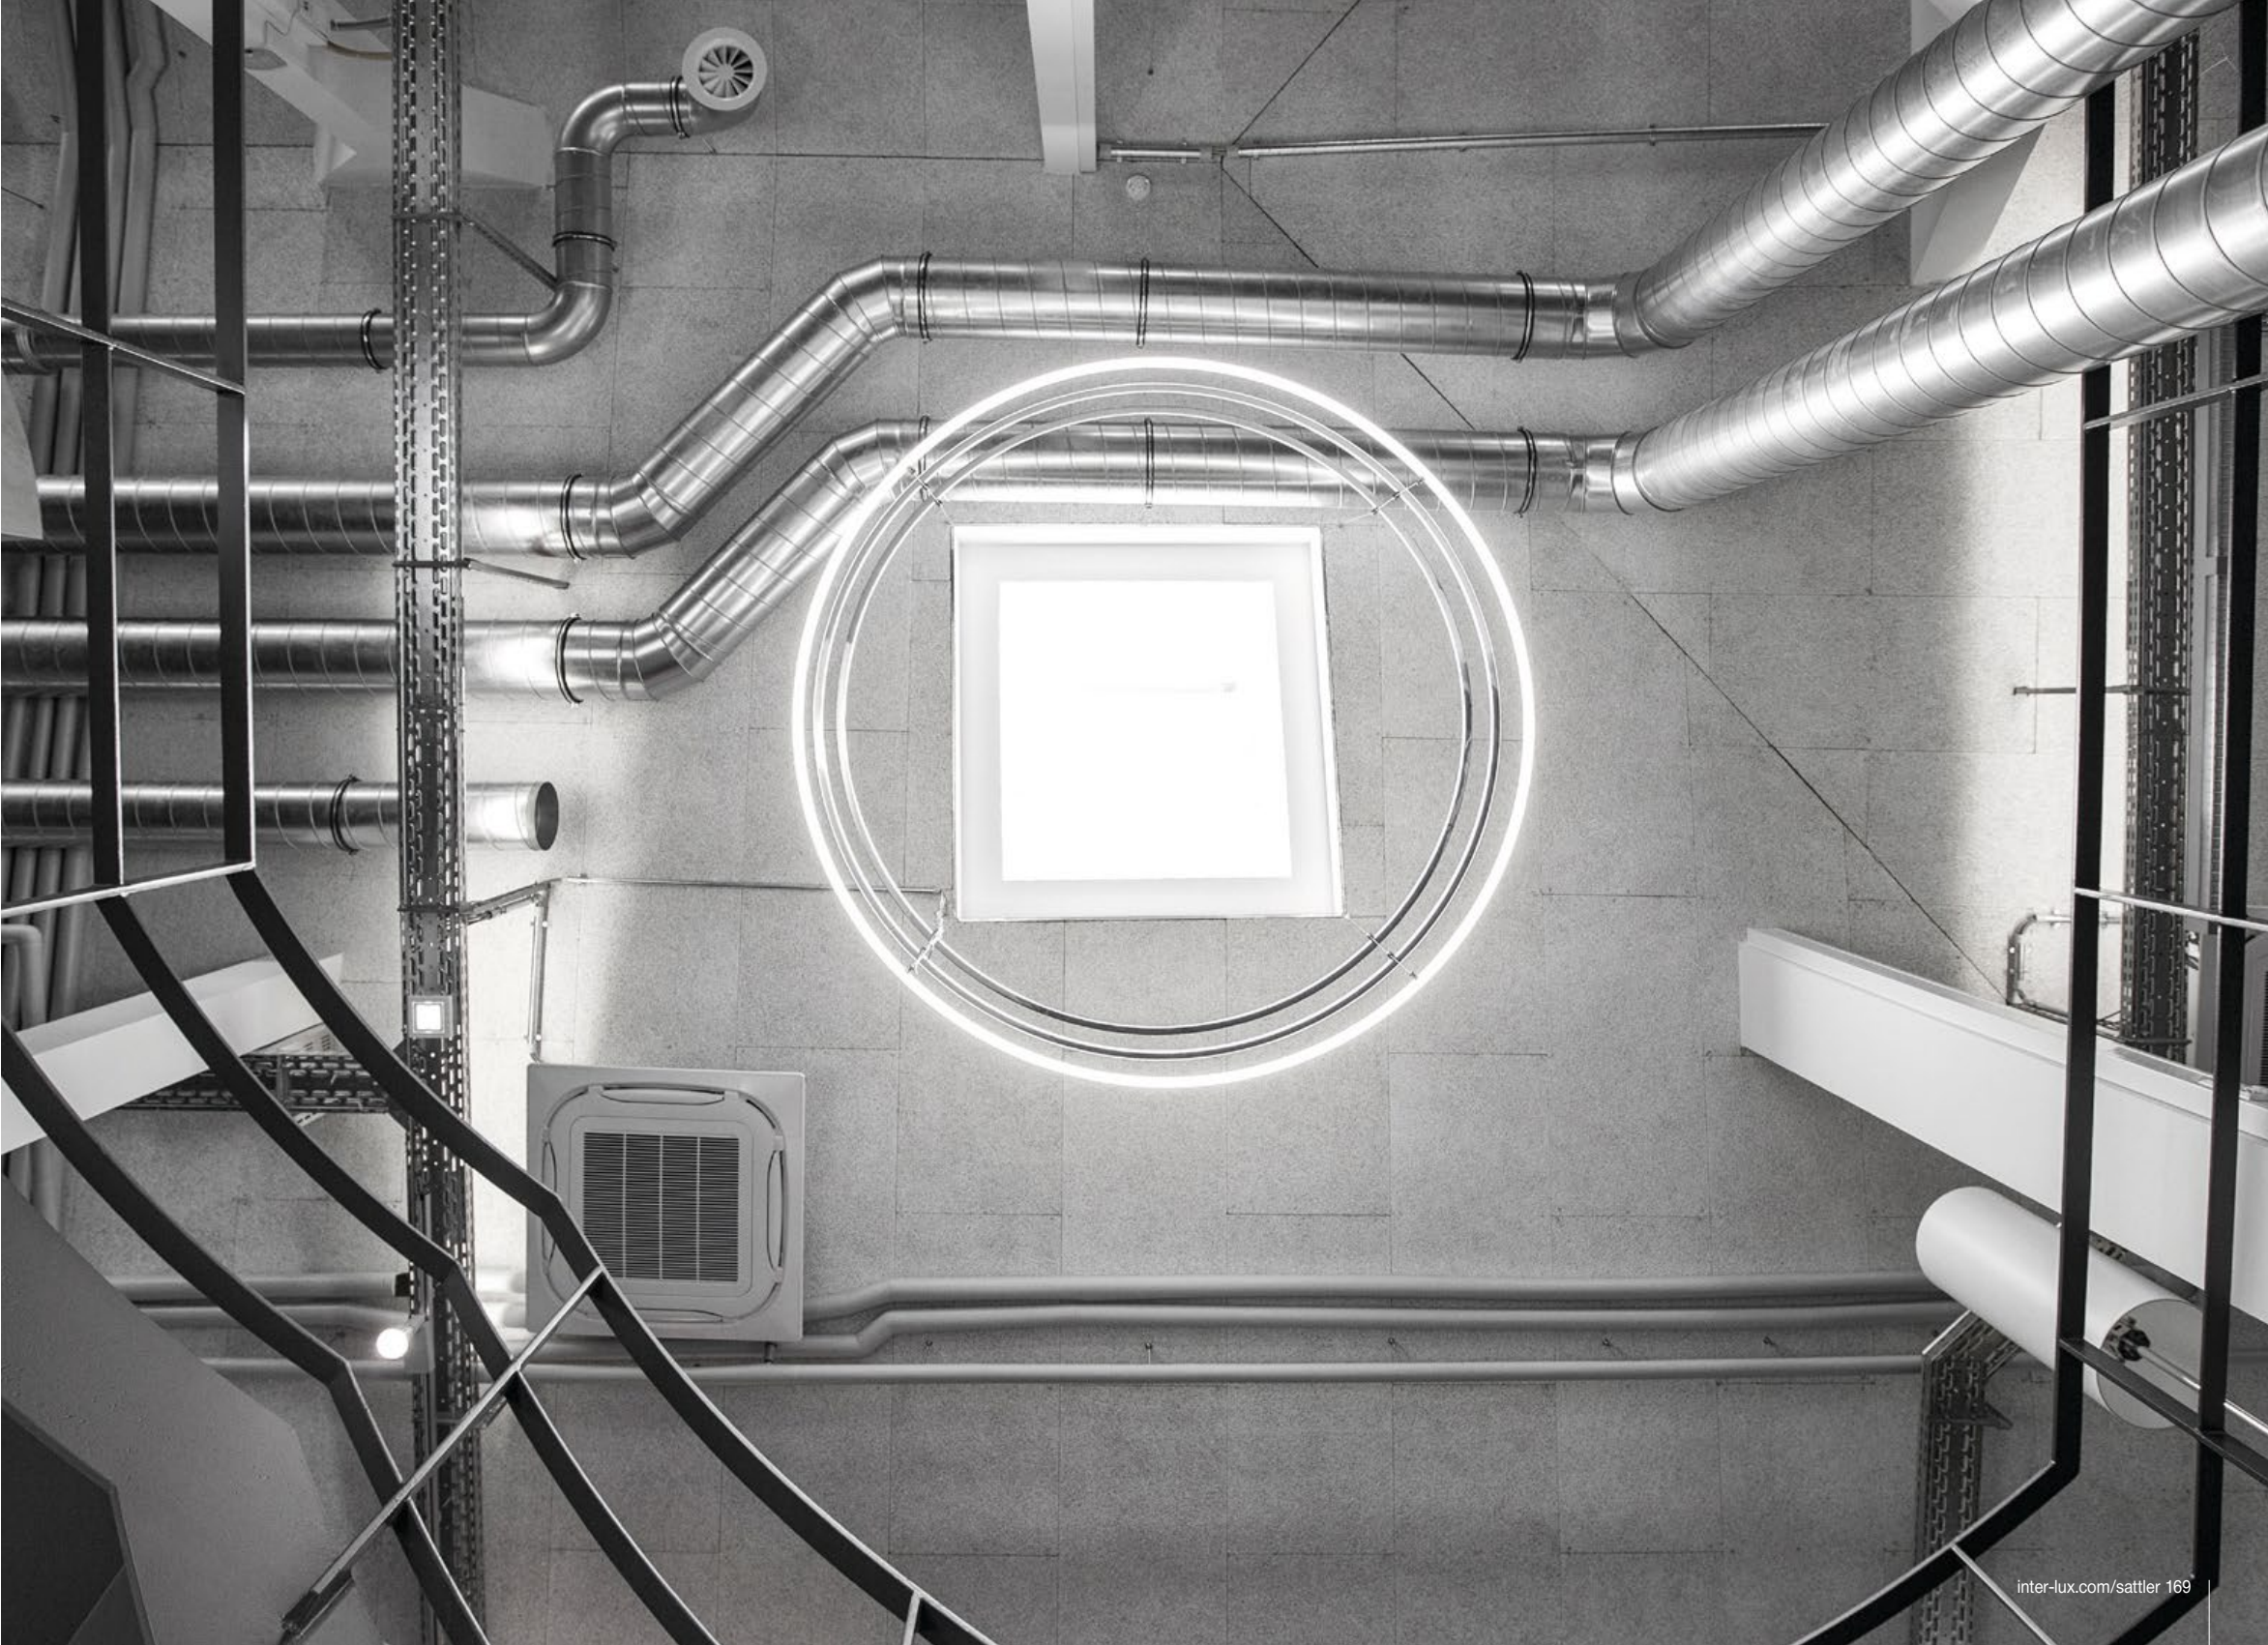

INSIEME




Ø 61"

Project:
Mainmetall Großhandelsges. m. b. H., Bürgstadt
Planner: Mosecker GmbH & Co. KG



INSIEME

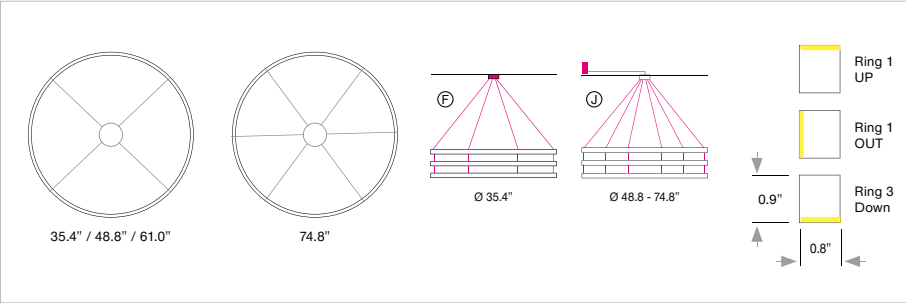

Housing:

Mounting:

Lamping:

Pendant light with 3 circular aluminum profiles and integrated acrylic covers

Pendant light, inclusive (Ø 35.4"), 4 current-carrying steel cables (196.9") and canopy with integrated power supply or (Ø 48.8-74.8"), 4/6 current-carrying steel cables, canopy and external power supply unit in suspended ceiling

LED-technology 24V, warmwhite 3000K (63)

Size: Ø inch	Watt LED	Lumen¹	Weight² lbs	Item No.	White
Ø 35.4"	165	9,397	11.0	764.63.01.00.	11
Ø 48.8"	216	10,157	15.4	765.63.01.00.	11
Ø 61.0"	264	12,111	19.8	766.63.01.00.	11
Ø 74.8"	330	19,056	24.2	767.63.01.00.	11

Optional:

Design:

LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200K (22).
Dimmable: DMX, 1-10V, 0-10V or DALI
Mounting versions: R (page 196)
Finishes: 22, 27, 30, 32, 33, 35, 36, 37, 38, 40, 42 (page 193)
Remote control: Bluetooth

MARKUS BISCHOF patented

For technical information, see specification sheet: inter-lux.com/sattler

3000 K (63)

LED

IP 20

F

III

ENEC

CE

optional: Bluetooth



Project: Mainmetall Großhandelsges. m. b. H., Bürgstadt

LIGHT FOR NEW IDEAS




FIO

FIO

Project: Wohnhaus Karlsruhe
Planner: Licht- Center Speyer. Photo: Sattler

FIO

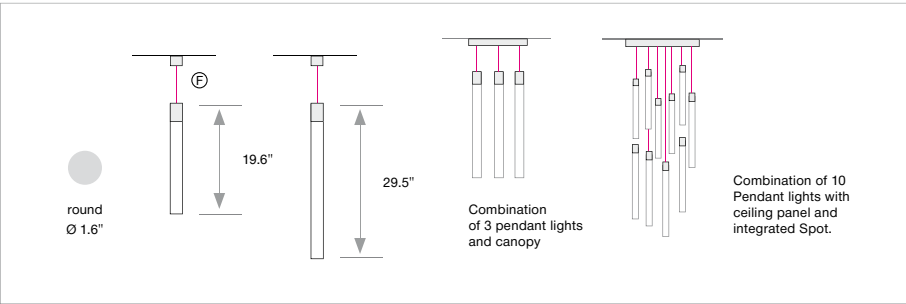

Housing:	Solid acrylic rod, with metal frame.			
Mounting:	Pendant light, inclusive canopy (round) and steel cable suspensions 78.7" (F)			
Lamping:	LED 24V, warm white 3000 K (63), CRI > 90			
Size: Ø / L inch	Watt LED	Weight ² lbs	Item No.	White
FIO Single				
Ø 2 / 19.6"	4	2.2	965.63.01.00.	11
Ø 2 / 29.5"	4	3.3	968.63.01.00.	11
FIO Set of 3				
3 x Ø 2 / 19.6"	12	11.0	966.63.01.00.	11
3 x Ø 2 / 29.5"	12	14.3	967.63.01.00.	11
FIO ELEMENT Set of 10				
5 x Ø 2 / 19.6"	40			
5 x Ø 2 / 29.5"	40		969.63.00.00.	11
Accentuated light, pimarily meant for decorativ effect.				
Optional: LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200 (22) Finishes: 10, 22, 27, 30, 32, 33, 35, 36, 37, 38 (page 193)				
Design:	SATTLER			
Note: Beam creates concentric circle pattern on surface below.				

Canopy long



For technical information, see specification sheet: inter-lux.com/sattler

3000 K
(63)

LED

IP 20

F

III

CE


optional: 4000 K
(69) 2700 K
(61) 2200 K
(22)



TIA



TIA

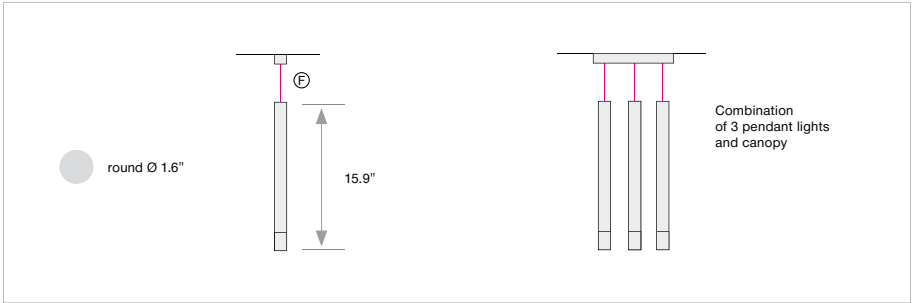

Housing:	Solid aluminum housing				
Mounting:	Pendant light, inclusive canopy (round) and steel cable suspensions 78.7" (F)				
Lamping:	LED 24V, warm white 3000 K (63), CRI > 90				
Size: Ø / L inch	Watt LED	Lumen¹	Weight² lbs	Item No.	White
TIA Single					
Ø 1.6 / 15.5"	4	360	2.2	975.63.01.00.	11
TIA Set of 3					
Ø 1.6 / 15.5"	12	1,080	11.0	976.63.01.00.	11
Optional:	LED-technology 24V: neutralwhite 4000K (69), extra warm-white 2700K (61), 2200 (22) Finishes: 10, 22, 27, 30, 32, 33, 35, 36, 37, 38 (page 193)				
Design:	SATTLER				

Canopy long



For technical information, see specification sheet: inter-lux.com/sattler

3000 K (63)

LED

IP 20

F

III

CE

optional:

4000 K (69)

2700 K (61)

2200 K (22)




IDEAS START IN THE MIND



Ulrich Sattler



Markus Bischof



Jürgen Beckert

PROFILE OVERVIEW



INNOVATIONS
IN FORM AND FUNCTION



Project: Hörmann KG
Architect: Wannenmacher+Möller GmbH
Photo: Wannenmacher+Möller GmbH



White



11 white
fine textured

FINISH

Aluminum




22 hand polished



27 brush finished
aluminum

Powder coated



10 black
fine textured



30 anthracite
fine textured



32 crocodile
black



33 sand silver
fine textured



35 gold



36 brass



37 bronze
fine textured



38 copper

On request



40 brass patinated




42 bronze patinated

POWER SUPPLY CABLES

Standard
(specify)




000 suspension /
power cable
copper / steel



Z70 silver


Optional



Z91 PVC cable
transparent



Z71 white




Z72 grey




Z73 black



Z74 orange



Z75 red



Z76 green

CANOPY



Ceiling mounted
11 white



Pendant
11 white




Canopy long version
11 white

TECHNICAL INFORMATION



Environmentally Conscious:

Our lights are equipped with the latest in LED technology, which is energy saving and long-lasting, therefore preserving the environment. The use of well selected materials, guarantees an environmentally friendly recycling process of almost every component.



These lamps have built-in LED lights:

- | | |
|-------------------|-------------------|
| DOPPIO | SOFT DELTA |
| DOPPIO ELLIPSE | SOFT QUADRA |
| DOPPIO LINEA | SOFT SQUARE |
| CIRCOLO MINI | CIRCOLO |
| SLIM ELLIPSE | ELLIPSE |
| SLIM | CIRCOLO INVERSE |
| SLIM WALL | ANELLO |
| SLIM TABLE | LUCE VERDE ANELLO |
| GIRATA | LUCE VERDE SLIM |
| OCULI | HIGHMOON FLAT |
| TRIS | CERN |
| INSOSPESO CEILING | QUADRA |
| INSOSPESO PENDANT | SKY |
| INSOSPESO FLOOR | ALETTA |
| INSOSPESO WALL | ANGOLO |
| FIO | ACOUSTIC LIGHT |
| TIA | PANEL |
| TOCCATA | |
| INSIEME | |
| UNIONE | |
| INIZIO | |
| CIRCOLO SELECTION | |
| ROTOLO SELECTION | |

874-2012



Meets the requirements of all applicable to this product EC directives.



For this product light distribution curves may be requested.



Handcrafted in Germany, certified quality



Protective rating



Light distribution



Sufficient load capacity of the ceiling structure has to be ensured



Bluetooth 4.0 CASAMBI remote control through app



ENOCEAN wireless push button



Products with this mark have been tested and certified to comply with UL safety standards for the US-American and Canadian market. Some product characteristics, however, may not bear the certification. Please do not hesitate to contact us in case of doubt.
"Conforms to UL-STD 1598, Certified to CSA-STD C22.2 No. 250.0-08"



Protection class



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C.



Horizontal or vertical mounting possible



Dimmable









LED-technology 24V: 5000K (62), 3000K (63), 2700K (61), 2200K (22)



RGB Color Control Technology

Technical data is subject to change. Errors and omissions excepted
1) Luminaire luminous flux, all marked values are rated values
2) Weight of lamps without technic unit or canopy

MOUNTING
VERSION

						
	A	B	C	D	E	F
	3/4/6-point suspension with external power supply unit in suspended ceiling	3/4/6-point suspension with external power supply unit in separate canopy	1-point suspension with external power supply unit in suspended ceiling	1-point suspension with external power supply unit in separate canopy	suspension through canopy	Current-carrying steel cables. Not in combination with RGB
SOFT DELTA	☒ Standard	☐	—	—	☐	☐
SOFT DELTA L + A	☒ Standard	☐	—	—	☐	☐
SOFT QUADRA	☒ Standard	☐	—	—	☐	☐
SOFT QUADRA L + A	☒ Standard	☐	—	—	☐	☐
SOFT SQUARE	☒ Standard	☐	—	—	☐	☐
SOFT SQUARE L + A	☒ Standard	☐	—	—	☐	☐
ELLIPSE	☒ Standard	☐	—	—	☐	☐
ELLIPSE L + A	☒ Standard	☐	—	—	☐	☐
ELLIPSE HALF-SHELL	☒ Standard	☐ 2er-Set	—	—	—	—
CIRCOLO	☒ Standard	☐	☐ max. 70.9" larger size on request	☐ max. 70.9" larger size on request	☐ > max. 70.9"	☐ > max. 70.9"
CIRCOLO INVERSE	☒ Standard	☐	☐ max. 70.9" larger size on request	☐ max. 70.9" larger size on request	☐ > max. 70.9"	☐ > max. 70.9"
ANELLO	☒ Standard	☐	—	—	☐ > max. 78.7"	—
LUCE VERDE ANELLO	☒ Standard	☐	—	—	—	—
LUCE VERDE SLIM	☐	☐	—	—	☒ Standard	—
HIGHMOON FLAT	☒ Standard	☐	☐	—	☐	—
QUADRA	☒ Standard	☐	—	—	☐	—
SKY	—	☒ Canopy / Canopy in suspended ceiling	—	—	—	—
ALETTA	—	—	—	—	☐	☒ Standard
ANGOLO	—	—	—	—	☒ Standard	—
ACOUSTIC LIGHT PANEL	—	☒ Canopy / Canopy in suspended ceiling	—	—	—	—
ACOUSTIC PANEL	☒ 4-point suspension without power supply	—	—	—	—	—
CIRCOLO SELECTION	—	☒ Canopy / Canopy in suspended ceiling	—	—	—	—
ROTOLO SELECTION	—	☒ Canopy / Canopy in suspended ceiling	—	—	—	—

R

Suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.

S

Suspension with pendant canopy

T

Suspension with pendant canopy and current-carrying steel cables. Not in connection with RGB.

G

Direct ceiling mounting 1.9" with external power supply unit in suspended ceiling

H

Direct ceiling mounting 1.9" with external power supply unit in separate canopy

W

Wall lamp with 2 wall brackets and external power supply unit in false wall

Ceiling opening for supply cable.
Nr. 200.00.00.00.00

Suspension point as clamping unit with 3/4/6 cables
Nr. 202.00.00.00.00

☐ > max. 52.8"

☐

☐

☐

☐

—

☐

☐

☐ > max. 52.8"

☐

☐

☐

☐

—

☐

☐

☐ > max. 65.4"

☐

☐

☐

☐

—

☐

☐

☐ > max. 65.4"

☐

☐

☐

☐

—

☐

☐

☐ > max. 49.2"

☐

☐

☐

☐

—

☐

☐

☐ > max. 49.2"

☐

☐

☐

☐

—

☐

☐

☐ > max. 65.8"

☐ > max. 65.8" larger size on request

☐ > max. 65.8" larger size on request

☐

☐

—

☐

☐

☐ > max. 65.8"

☐ > max. 65.8" larger size on request

☐ > max. 65.8" larger size on request

☐

☐

—

☐

☐

—

—

—

☐

—

—

☐

—

☐ > max. 63" H 4.2"

☐ > max. 70.9" larger size on request

☐ > max. 70.9" larger size on request

☐

☐

—

☐

☐ max. 70.9"

—

☐ > max. 63" larger size on request

☐ > max. 63" larger size on request

☐

☐

—

☐

☐ max. 70.9"

—

—

—

☐ > max. 102.4" larger size on request

—

—

☐

—

—

—

—

—

—

☒ Standard

☐

—

—

—

—

—

—

☒ Standard

☐

—

—

☐

—

☐

☐

—

☐

☐ max. 70.9"

—

—

—

☐

—

—

☐

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

—

☐

☐

—

☐

—

—

—

—

—

—

—

—

—

—

—

—

☐

☐

—

☐

—

—

—

—

☐







☐

—

☐

—

MOUNTING
VERSION

						
	A 3/4/6-point suspension with external power supply unit in suspended ceiling	B 3/4/6-point suspension with external power supply unit in separate canopy	I 1-14 suspensions through canopy and 1-3 power supply cables. External power supply unit in suspended ceiling	J 4/6 suspensions through canopy and current-carrying steel cables. External power supply unit in suspended ceiling.	E suspension through canopy	F Current-carrying steel cables. Not in combination with RGB
DOPPIO	☒ Standard	☐	☐	☐	☐ > max. 74.8"	☐ > max. 74.8"
DOPPIO ELLIPSE	☒ Standard	☐	☐	☐	☐	☐
DOPPIO LINEA	☒ Standard	☐	☐	☐	☐	☐
CIRCOLO MINI	☐	☐	☐	☐	☐	☒ Standard
SLIM ELLIPSE	☐	☐	☐	☐	☐	☒ Standard
SLIM DIRECT, INDIRECT, IN, OUT	☐	☐	☐	☐	☐	☒ Standard
GIRATA HORIZONTAL	☐	☐	☐	☐	☐	☒ Standard
GIRATA VERTICAL	☐	☐	☐	☐	☐	☒ Standard
OCULI	☐	☐	☐	☐	☒ Standard	☐
TRIS	☐	☐	☐	☐	☐	☒ Standard
INSOSPESO PENDANT	☐	☐	☐	☐	☐	☒ Standard
SLIM WALL	☐	☐	☐	☐	☐	☐
FIO	☐	☐	☐	☐	☐	☒ Standard
FIO ELEMENT	☐	☐	☐	☐	☐	☒ Standard
TIA	☐	☐	☐	☐	☐	☒ Standard
TOCCATA	☐	☐	☒ Standard 74.8"	☒ Standard 61"	☐	☒ Standard 35.4"
INSIEME	☐	☐	☐	☒ Standard	☐	☐
UNIONE	☐	☐	☒ Standard	☐	☐	☐
INIZIO	☐	☐	☒ Standard	☐	☐	☐
CIRCOLO SELECTION	☐	☒ Canopy / Canopy in suspended ceiling	☐	☐	☐	☐
ROTOLO SELECTION	☐	☒ Canopy / Canopy in suspended ceiling	☐	☐	☐	☐

R

Suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.

S

Suspension with pendant canopy

T

Suspension with pendant canopy and current-carrying steel cables. Not in connection with RGB.

G

Direct ceiling mounting 1.9" with external power supply unit in suspended ceiling

H

Direct ceiling mounting 1.9" with external power supply unit in separate canopy

W

Wall lamp with wall bracket

Ceiling opening for supply cable.
Nr. 200.00.00.00.00

Suspension point as clamping unit with 3/4/6 cables
Nr. 202.00.00.00.00

☐ > max. 74.8"

☐ > max. 74.8" larger size on request

☐ > max. 74.8" larger size on request

☐ > max. 102.4"

☐ > max. 102.4"

☐

☐

☐ max. 74.8"

☐ > max. 61"

☐ > max. 61" larger size on request

☐ > max. 61" larger size on request

☐

☐

☐

☐

☐ max. 61"

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐ > max. 61" larger size on request

☐ > max. 61" larger size on request

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☒ Standard

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

☐

SELECTED PRODUCTS

HIGH SATTLER QUALITY

TIMELESS DESIGN

INNOVATIVE LED TECHNOLOGY

SHORT LEAD TIMES

SELECTION LINE

1320

1800



2600



CIRCOLO SELECTION

CIRCOLO LED ring luminaires from our SELECTION series impress with their minimalistic, clear design and their energy-efficient LED light technology. The slim light rings can be integrated perfectly in any interior room design. Their direct and indirect light creates a special ambience in the room. By using a combination of several light rings of the same or different size, the CIRCOLO SELECTION series offers efficient, harmonious light solutions for a large variety of applications.

CIRCOLO SELECTION

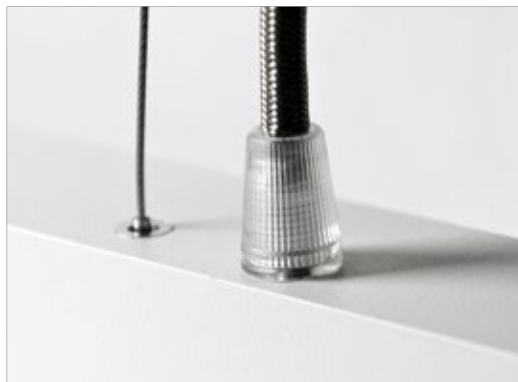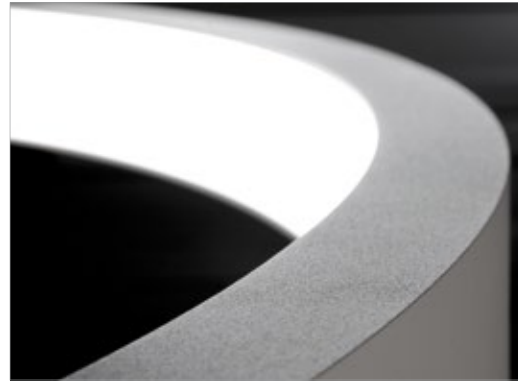

"The real magnitude of our products is in the detail."

Ulrich Sattler

CIRCOLO SELECTION



CIRCOLO SELECTION





CIRCOLO SELECTION



Architect: Wannenmacher+ Möller GmbH, Bielefeld



CIRCOLO SELECTION



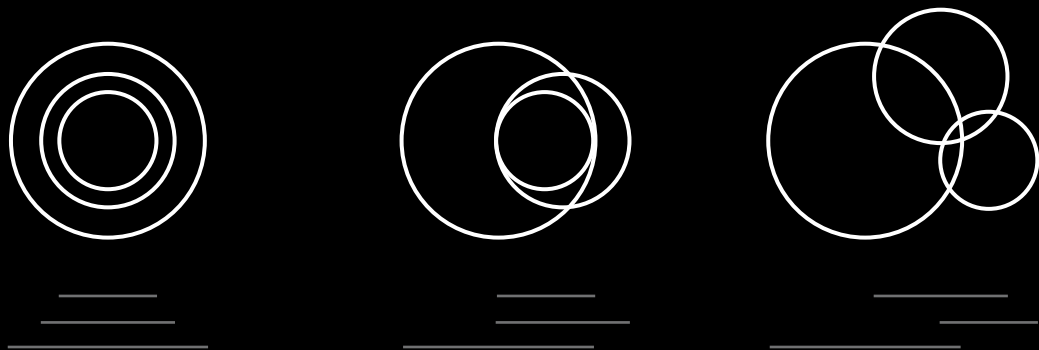
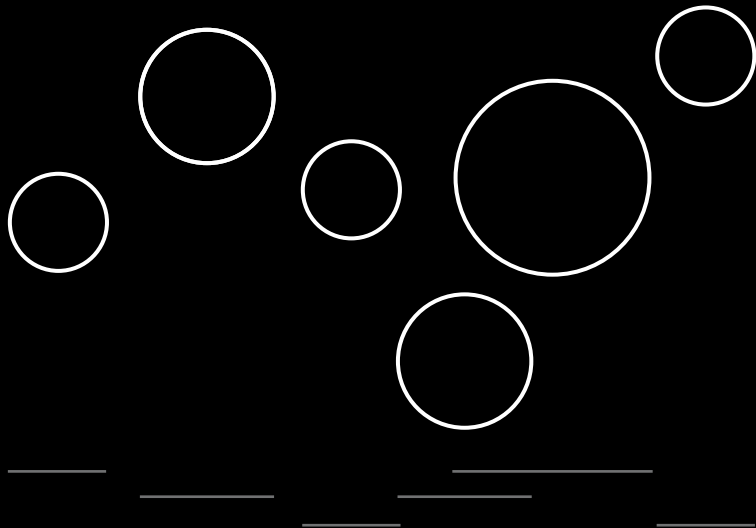


COMBINE AND VARY

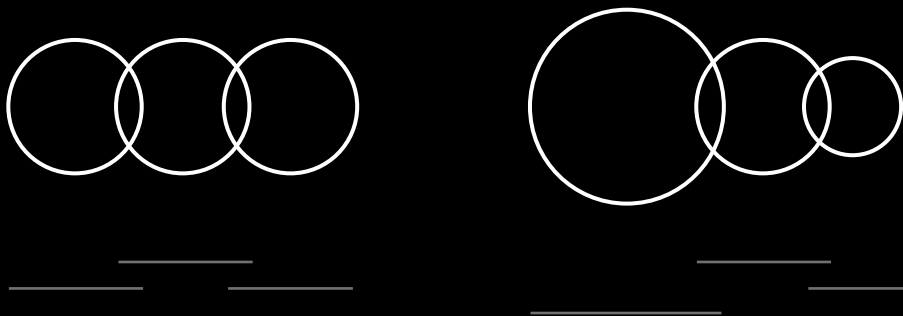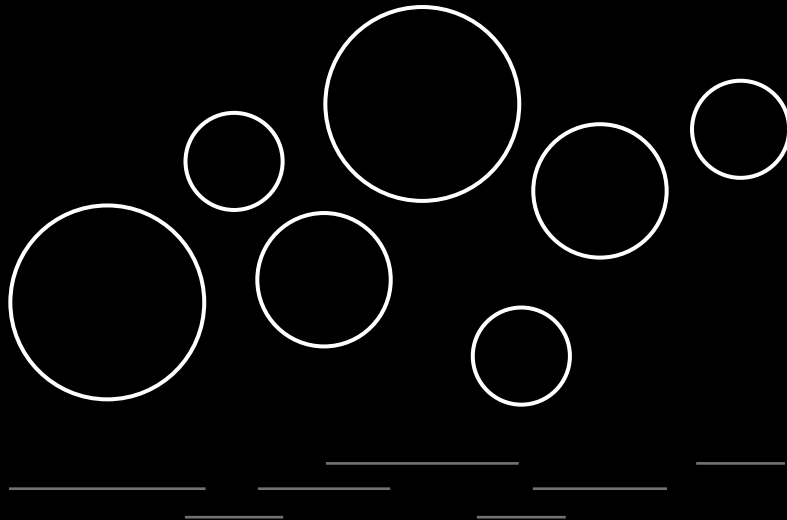

CIRCOLO SELECTION

COMBINE AND VARY

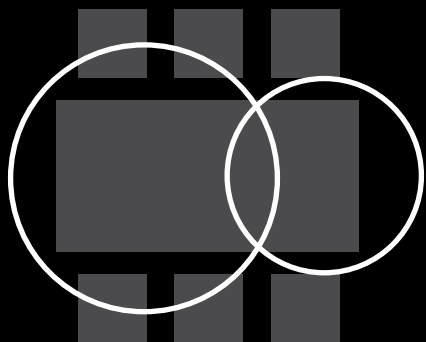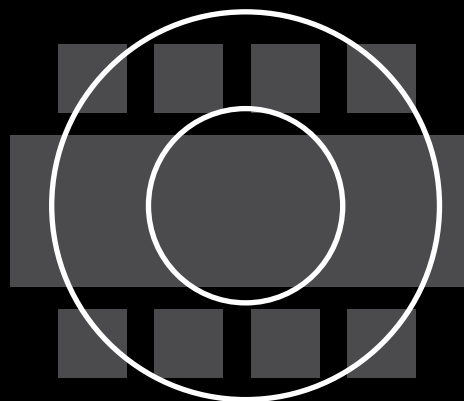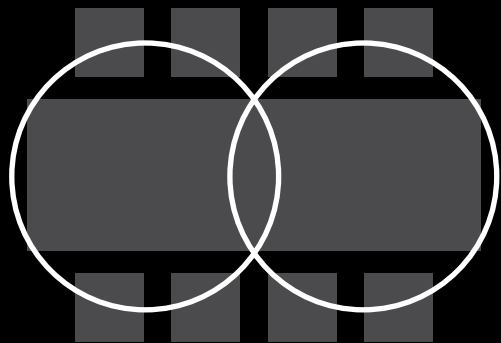

Ceiling Canopy white
51.9" / 70.8" Ø 9.8" / H 1.9"
102.3" Ø 11.8" / H 1.9"

CIRCOLO SELECTION

51.9/70.8" 102.3", 2 parts

1.6" 3.1"

Housing: Circular aluminum profile, white (11) with integrated acrylic diffuser on the inside

Mounting: Pendant light with 4 steel cable suspensions 196.8"
Canopy, white, to be placed in intermediate ceiling or direct ceiling mounting

Lamping: LED-technology 24V, neutralwhite 4000K (69), CRI > 83
Dimmable 0-10V / 1-10V

Size: Ø inch	Watt LED	Lumen	Weight lbs	Item No.	White
Ø 51.9"	62	8,600	39.7	1082.69.51.00	11
Ø 70.8"	85	11,800	55.1	1084.69.51.00	11
Ø 102.3"	123	17,100	79.3	1086.69.51.00	11

Optional:

Dimming: DALI, DMX
Bluetooth 4.0 CASAMBI Remote control via App
ENOCEAN wireless push button

Lamping: 3000K (63)

Finishes: anthracite (30)

Mounting: Direct ceiling mounting 1.9" (H)


Design: SATTLER

IP20 IP51 LED 3000K (63) 4000K (69)



910

1250

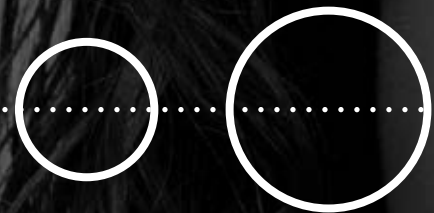



ROTOLO SELECTION

Simple and elegant. With its slim, 1.1" profile, the ROTOLO LED luminaire gives the impression of a floating light ring. Whether used as a single ring or in creative combinations with several luminaires - big, small, straight, overlapping or arranged in a slanting way: ROTOLO fascinates and offers a great deal of freedom for new lighting concepts.

ROTOLO SELECTION



ROTOLO SELECTION

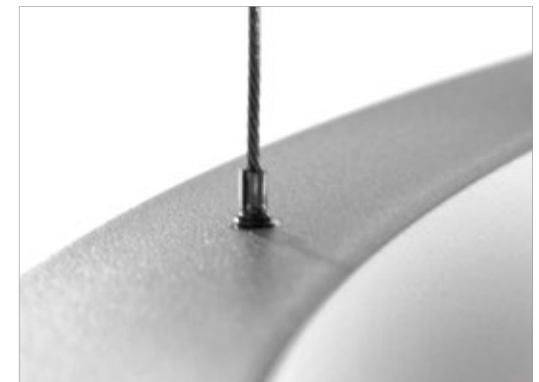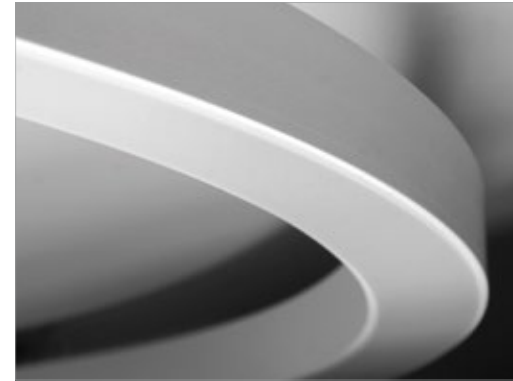

ROTOLO SELECTION



ROTOLO SELECTION



ROTOLO SELECTION



Project: SIKLA, Schlenker-Architekten, Villingen-Schwenningen







ROTOLO SELECTION







ROTOLO SELECTION

COMBINE AND VARY

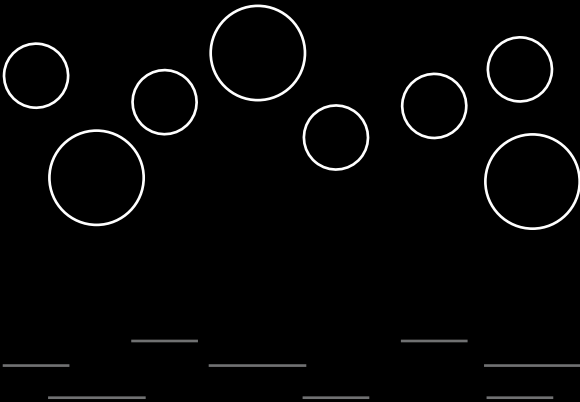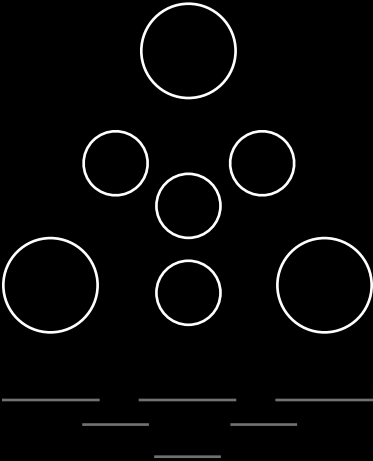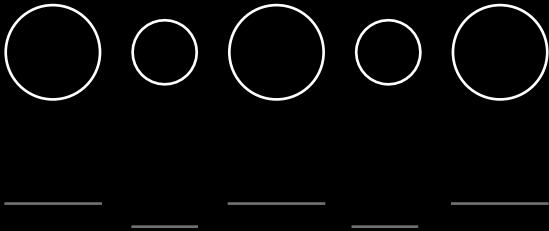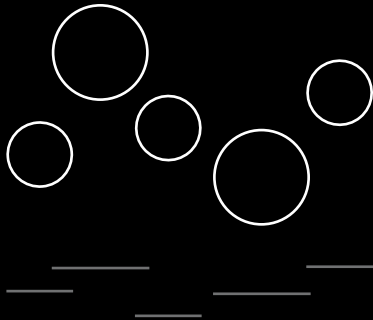


ROTOLO SELECTION

COMBINE AND VARY

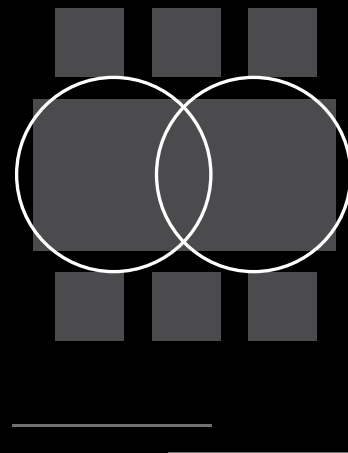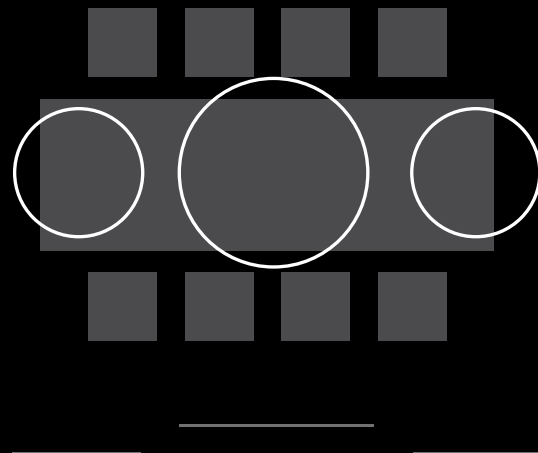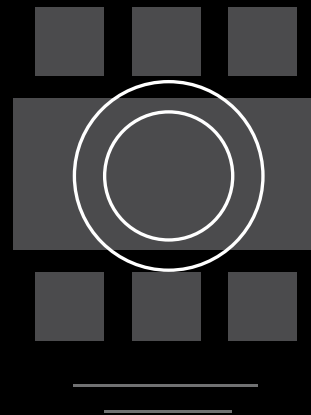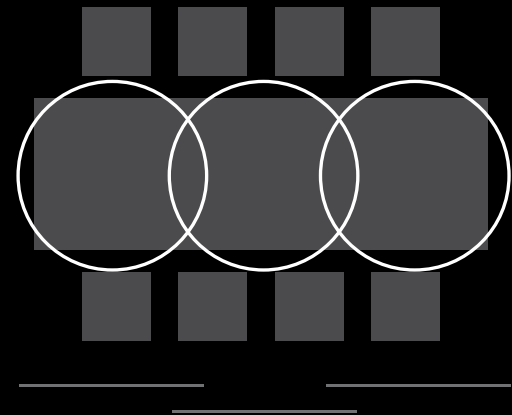

Ceiling Canopy white
Ø 9.8" / H 1.9"

ROTOLO SELECTION

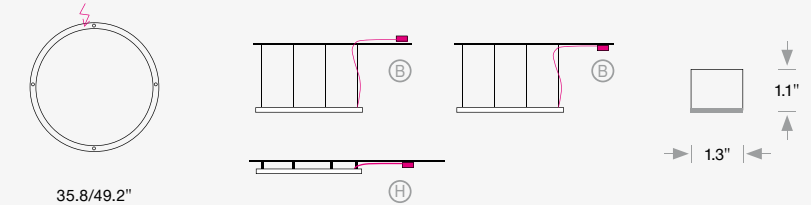

Housing: Circular aluminum profile, white (11) with integrated acrylic diffuser
 Mounting: Pendant light with 4 steel cable suspensions 196.8"
 Canopy, white, to be placed in intermediate ceiling or direct ceiling mounting (B)
 Lamping: LED-technology 24V, neutralwhite 4000K (69), CRI > 90
 Dimmable 0-10V / 1-10V

Size: Ø inch	Watt LED	Lumen	Weight lbs	Item No.	White
Ø 35.7"	55	4,613	7.7	1000.69.01.00	11
Ø 49.1"	72	5,997	12.1	1001.69.01.00	11

Optional:	Dimming:	DALI, DMX Bluetooth 4.0 CASAMBI Remote control via App ENOCEAN wireless push button
	Lamping:	2700K (61), 3000K (63)
	Finishes:	anthracite (30)
	Mounting:	Direct ceiling mounting 1.9" 


Design: SATTLER



FINISHES



11 white
fine textured




30 anthracite
fine textured

POWER SUPPLY
CABLES (specify)




000 suspension /
power cable
copper / steel




Z70 silver
metal braided


MOUNTING VERSION




Ⓑ
4-point suspension with
remote power supply unit
in separate canopy.



Ⓑ
4-point suspension with
remote power supply
unit in canopy, placed in
intermediate ceiling.



ⓓ
Direct ceiling mounting
1.9" with remote power
supply unit in separate
canopy.



ⓓ
Direct ceiling mounting
with remote power supply
unit in canopy, placed in
intermediate ceiling.

TECHNICAL INFORMATION



Environmentally Conscious:

Our lights are equipped with the latest in LED technology, which is energy saving and long-lasting, therefore preserving the environment. The use of well selected materials, guarantees an environmentally friendly recycling process of almost every component.



Meets the requirements of all applicable to this product EC directives.



Products with this mark have been tested and certified to comply with UL safety standards for the US-American and Canadian market. Some product characteristics, however, may not bear the certification. Please do not hesitate to contact us in case of doubt.
"Conforms to UL-STD 1598, Certified to CSA-STD C22.2 No. 250.0-08"



These lamps have built-in LED lights:

CIRCOLO SELECTION
ROTOLO SELECTION



For this product light distribution curves may be requested.



Handcrafted in Germany, certified quality



Products with positive ecobalance



Protective rating



Light distribution



Protection class



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C.



Dimmable



LED-Technology
3000K (63) warmwhite, 4000K (69) neutralwhite.



Sufficient load capacity of the ceiling structure has to be ensured

Technical data is subject to change. Errors and omissions excepted
1) The stated lumen output of the lights is without considering the acrylic covers or film
2) Weight of lamps without technic unit or canopy

874-2012

Lighting is about creating an environment
that uses light as the main medium of
expression. It means having one's work
blend seamlessly with the architecture,
often at the risk of not being seen.
It's about giving definition to a space.

inter•lux

inter-lux.com

SATTLER

sattler-lighting.com